


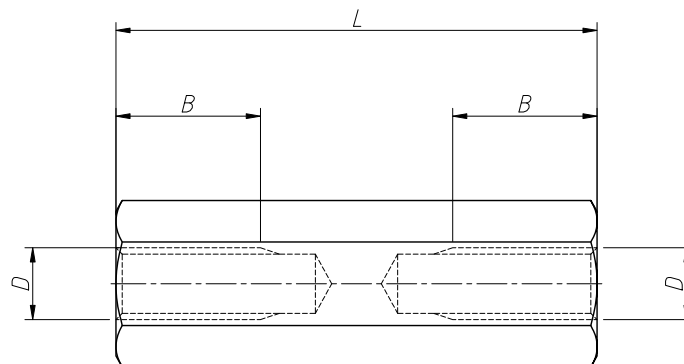

Blank:No Plated A:Ni Plated

ITEM	D	E(standard)	E(Unstandard)	H(standard)	L	B	Plated:-(A)
L-KLS8-DBK-M2-EX-LX-(A)	M2	E3.0	E4.0/E5.0	3.4	5-60mm	5-20 allows for penetration, 21-60:6mm	Blank:No Plated
L-KLS8-DBK-M2-EX-LX+B-(A)	M2	E3.0	E4.0/E5.0	3.4	5-60mm	According to customer requirements	
L-KLS8-DBK-M2.5-EX-LX-(A)	M2.5	E4.7	E4.0/E5.0/E6.0	5.3	5-60mm	5-20 allows for penetration, 21-60:6mm	
L-KLS8-DBK-M2.5-EX-LX+B-(A)	M2.5	E4.7	E4.0/E5.0/E6.0	5.3	5-60mm	According to customer requirements	
L-KLS8-DBK-M3-EX-LX-(A)	M3	E4.7	E5.0/E5.5	5.3	5-60mm	5-20 allows for penetration, 21-60:6mm	
L-KLS8-DBK-M3-EX-LX+B-(A)	M3	E4.7	E5.0/E5.5	5.3	5-60mm	According to customer requirements	
L-KLS8-DBK-M4-EX-LX-(A)	M4	E5.5/E6.0	E7.0/E8.0	6.2/6.8	5-60mm	5-20 allows for penetration, 21-60:6mm	-A:Ni Plated
L-KLS8-DBK-M4-EX-LX+B-(A)	M4	E5.5/E6.0	E7.0/E8.0	6.2/6.8	5-60mm	According to customer requirements	
L-KLS8-DBK-M5-EX-LX-(A)	M5	E7.0	E8.0	7.9	5-60mm	5-20 allows for penetration, 21-60:6mm	
L-KLS8-DBK-M5-EX-LX+B-(A)	M5	E7.0	E8.0	7.9	5-60mm	According to customer requirements	
L-KLS8-DBK-M6-EX-LX-(A)	M6	E8.0	E10.0	9.0	5-60mm	5-20 allows for penetration, 21-60:6mm	
L-KLS8-DBK-M6-EX-LX+B-(A)	M6	E8.0	E10.0	9.0	5-60mm	According to customer requirements	

ANGLE TOLERANCE		PROJECTION		Description:		
±3°				Brass Hexagonal Spacer		
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS8-DBK	
.x	±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
.xx	±0.20	Draw:	Song			2024-05-27
.xxx	±0.10	Check:	Daniel			2024-05-27