


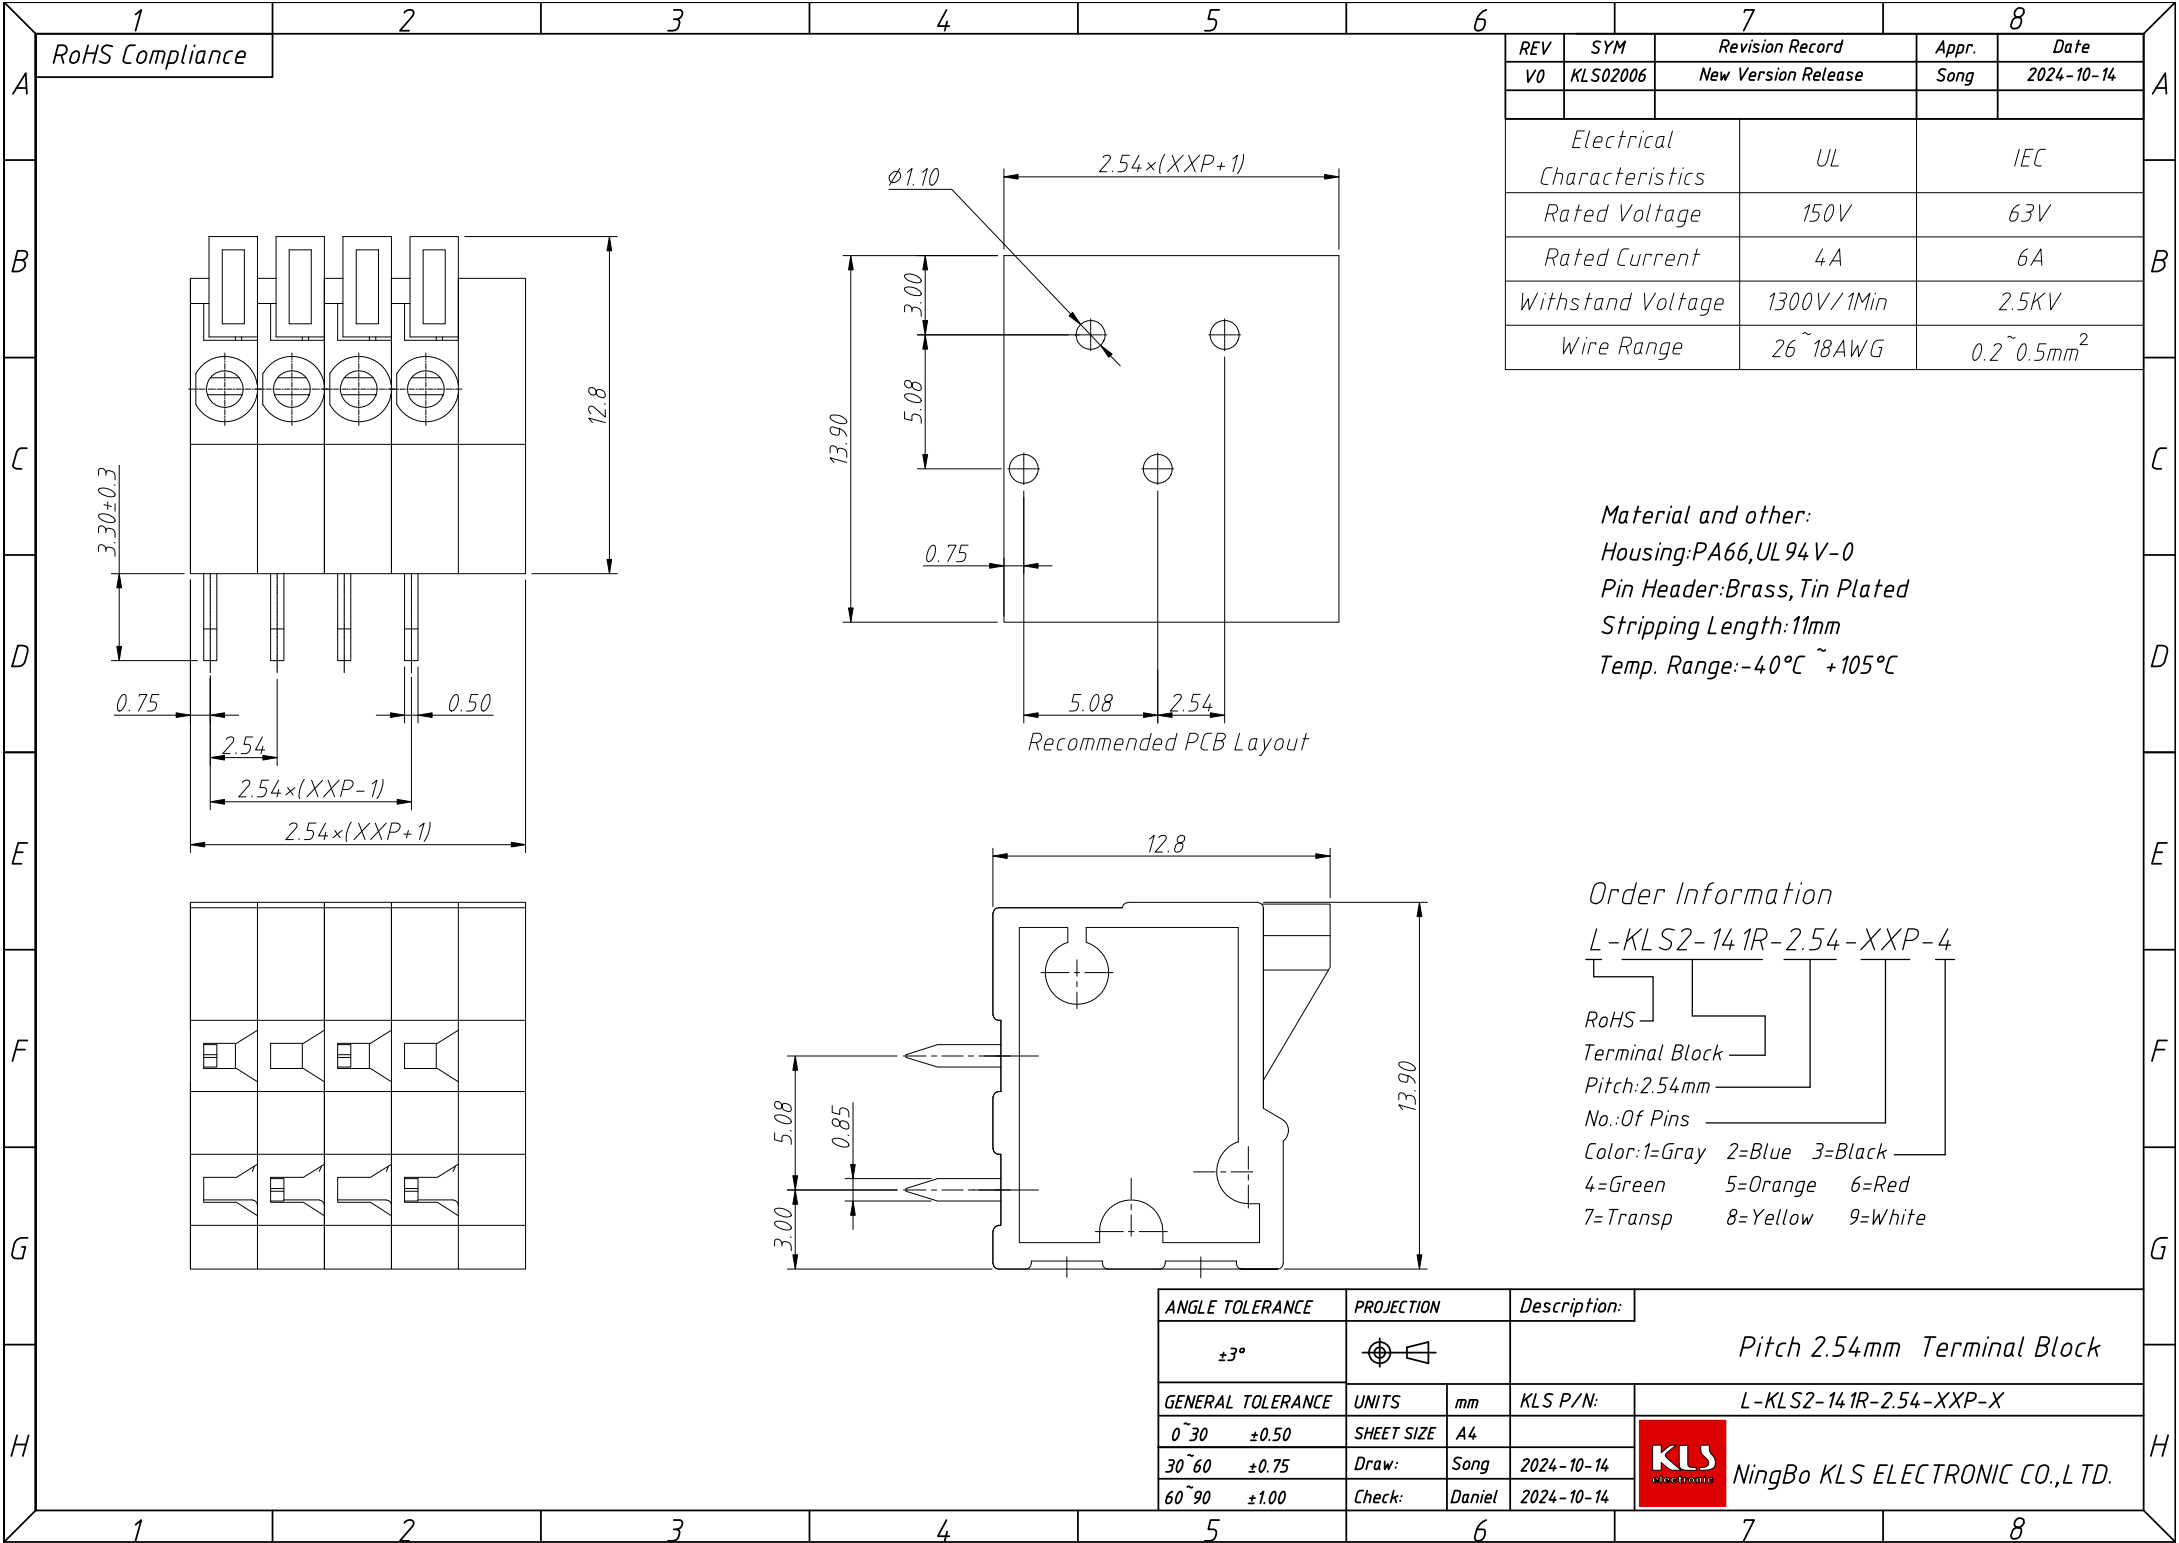

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Song	2024-10-14
Electrical Characteristics		UL	IEC	
Rated Voltage		150V	63V	
Rated Current		4A	6A	
Withstand Voltage		1300V/1Min	2.5KV	
Wire Range		26~18AWG	0.2~0.5mm ²	

Material and other:
Housing:PA66,UL 94 V-0
Pin Header:Brass,Tin Plated
Stripping Length:11mm
Temp. Range:-40°C ~+105°C

Order Information

L-KLS2-141R-2.54-XXP-4

RoHS
Terminal Block
Pitch:2.54mm
No.:Of Pins
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 2.54mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30	±0.50	SHEET SIZE
30~60	±0.75	Draw:
60~90	±1.00	Check:
KLS P/N:		L-KLS2-141R-2.54-XXP-X
KLS electronic		NingBo KLS ELECTRONIC CO.,LTD.