

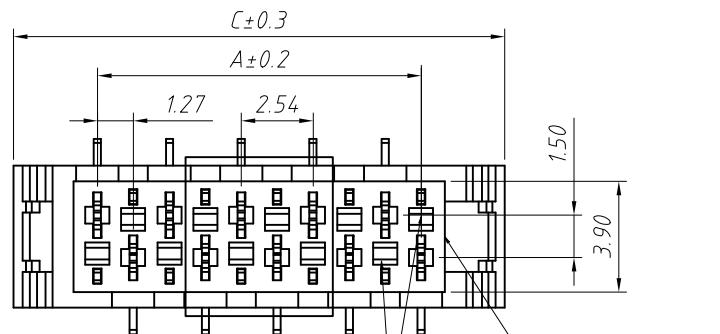


RoHS Compliance

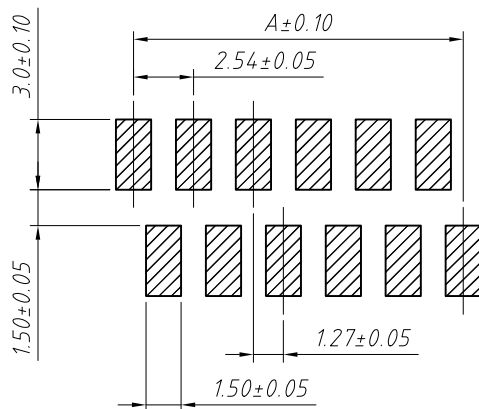



Reference Mating Interface Pattern:
1.27 Staggered Pitch×1.5 Row-Distance

Polarisation Slot

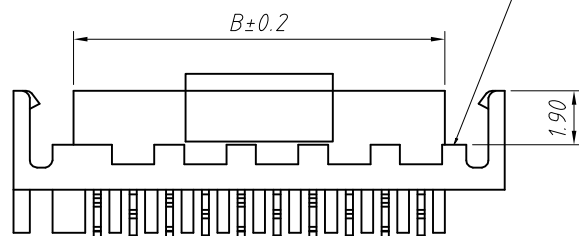

Recommended P.C.B Layout

Poles	DIM.A	DIM.B	DIM.C	Qty/Tube
04	3.81	5.50	9.71	59
06	6.35	8.04	12.25	47
08	8.89	10.58	14.79	39
10	11.43	13.12	17.33	33
12	13.97	15.66	19.87	29
14	16.51	18.20	22.41	25
16	19.05	20.74	24.95	23
18	21.59	23.28	27.49	21
20	24.13	25.82	30.03	19
22	26.67	28.36	32.57	17
24	29.21	30.90	35.11	16
26	31.75	33.44	37.65	15

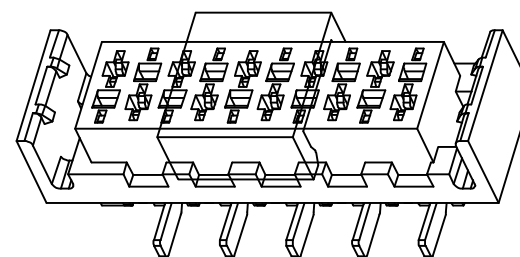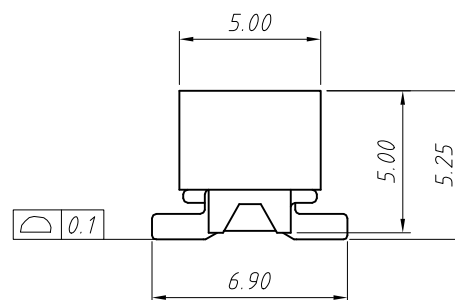

Material:

Housing: PA46/PA6T UL94V-0

Contacts: Phosphor bronze

Plating: Sn over 50u" nickel

Electrical Characteristics:

Current Rating: 1.0 AMP

Voltage Rating: 230V AC/DC

Withstand voltage: 500V AC/Minute

Contact Resistance: 20m Ohm max.

Insulator Resistance: 1000M Ohm min.

Operating Temperature: -40°C ~ +105°C

Order Information:

L-KLS1-204GD-XX-R-□-□

L: RoHS

Pitch: 2.54mm

XX-No. of 04 ~ 26pin

Color: R-Red B-Black

Material:

NONE=PA6T E=PA46

Packing:

TC=Cap+Tube C-R=Cap+Reel

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Micro Match Connector Female SMT With Ear
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Daniel
x.xxx ±0.10	Check:	Daniel
KLS P/N:		L-KLS1-204GD-XX-R-□-□
NingBo KLS ELECTRONIC CO.,LTD.		