


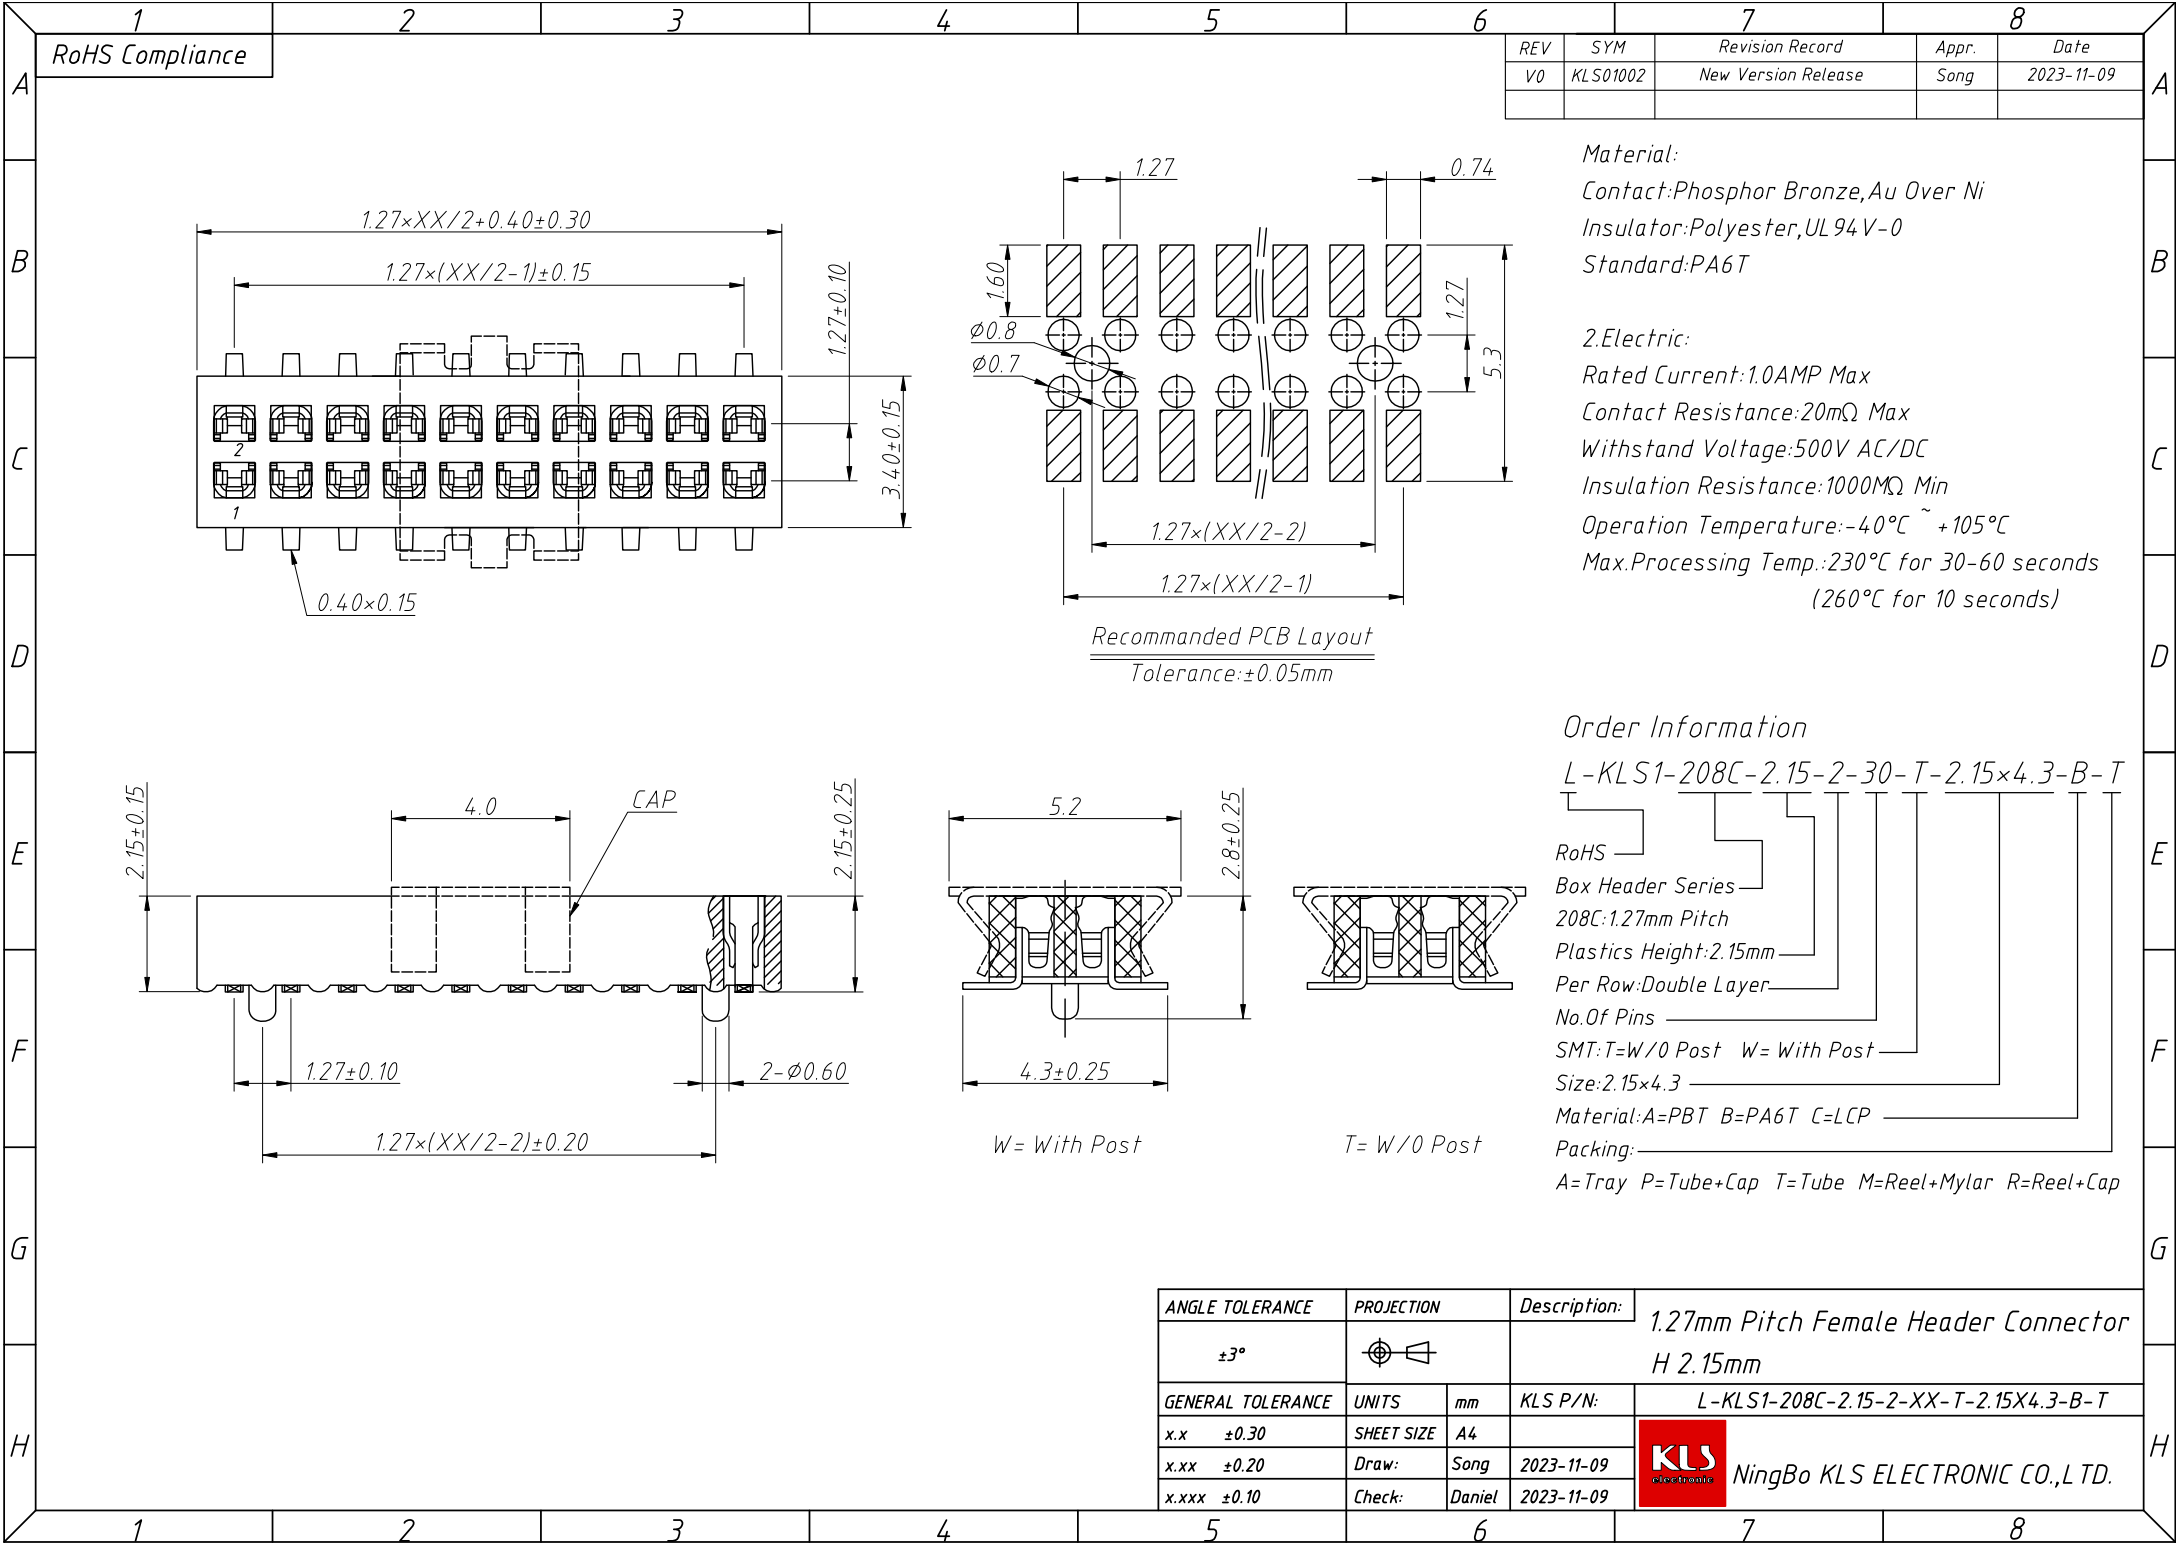

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01002	New Version Release	Song	2023-11-09

Material:
Contact: Phosphor Bronze, Au Over Ni
Insulator: Polyester, UL 94 V-0
Standard: PA6T

2. Electric:
Rated Current: 1.0AMP Max
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C ~ +105°C
Max. Processing Temp.: 230°C for 30-60 seconds
(260°C for 10 seconds)

Order Information
L-KLS1-208C-2.15-2-30-T-2.15x4.3-B-T

RoHS

Box Header Series

208C: 1.27mm Pitch

Plastics Height: 2.15mm

Per Row: Double Layer

No. Of Pins

SMT: T=W/O Post W= With Post

Size: 2.15x4.3

Material: A=PBT B=PA6T C=LCP

Packing:

A=Tray P=Tube+Cap T=Tube M=Reel+Mylar R=Reel+Cap

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				1.27mm Pitch Female Header Connector H 2.15mm	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	±0.30	SHEET SIZE	A4	L-KLS1-208C-2.15-2-XX-T-2.15X4.3-B-T	
x.xx	±0.20	Draw:	Song	2023-11-09	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2023-11-09	