


REV	SYM	Revision Record	Appr.	Date
V0	KLS05089	New Version Release	Song	2025-08-09

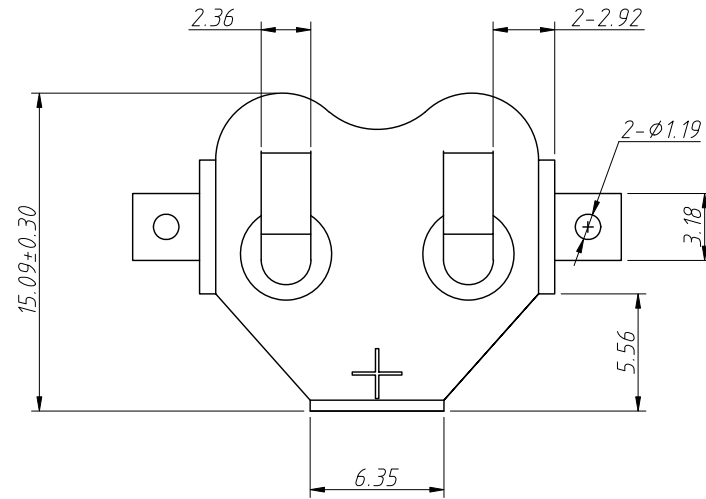

Material:Phosphor Bronze,T=0.25mm,Nickel Plated





Electric:

Dielectric Voltage:500V AC One Sec Level

Contact Resistance:30 mΩ Max

Insulator Resistance:100 MΩ Min

Operating Temperature:-40℃~+85℃

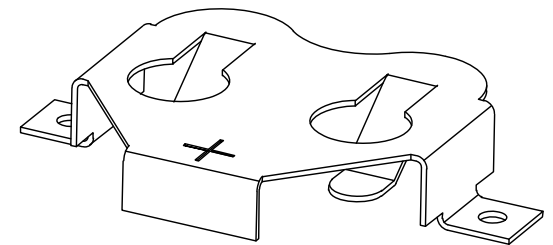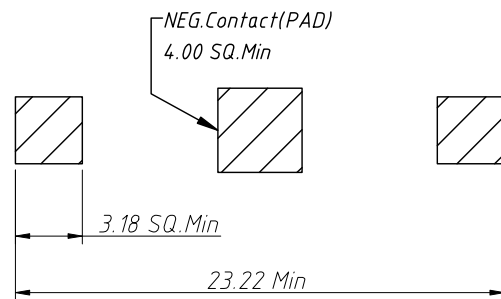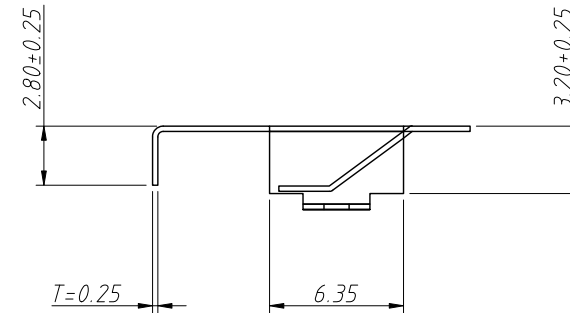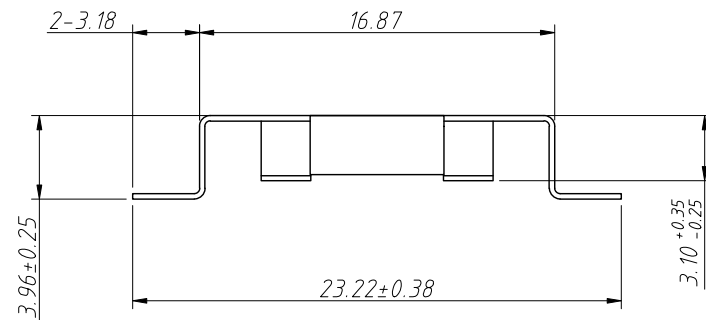

Recommended PCB Layout
Tolerance:±0.05mm

ANGLE TOLERANCE	PROJECTION	Description:	Coin Cell Retainers	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS5-CR1632-02-R
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Song	2025-08-09	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2025-08-09	