


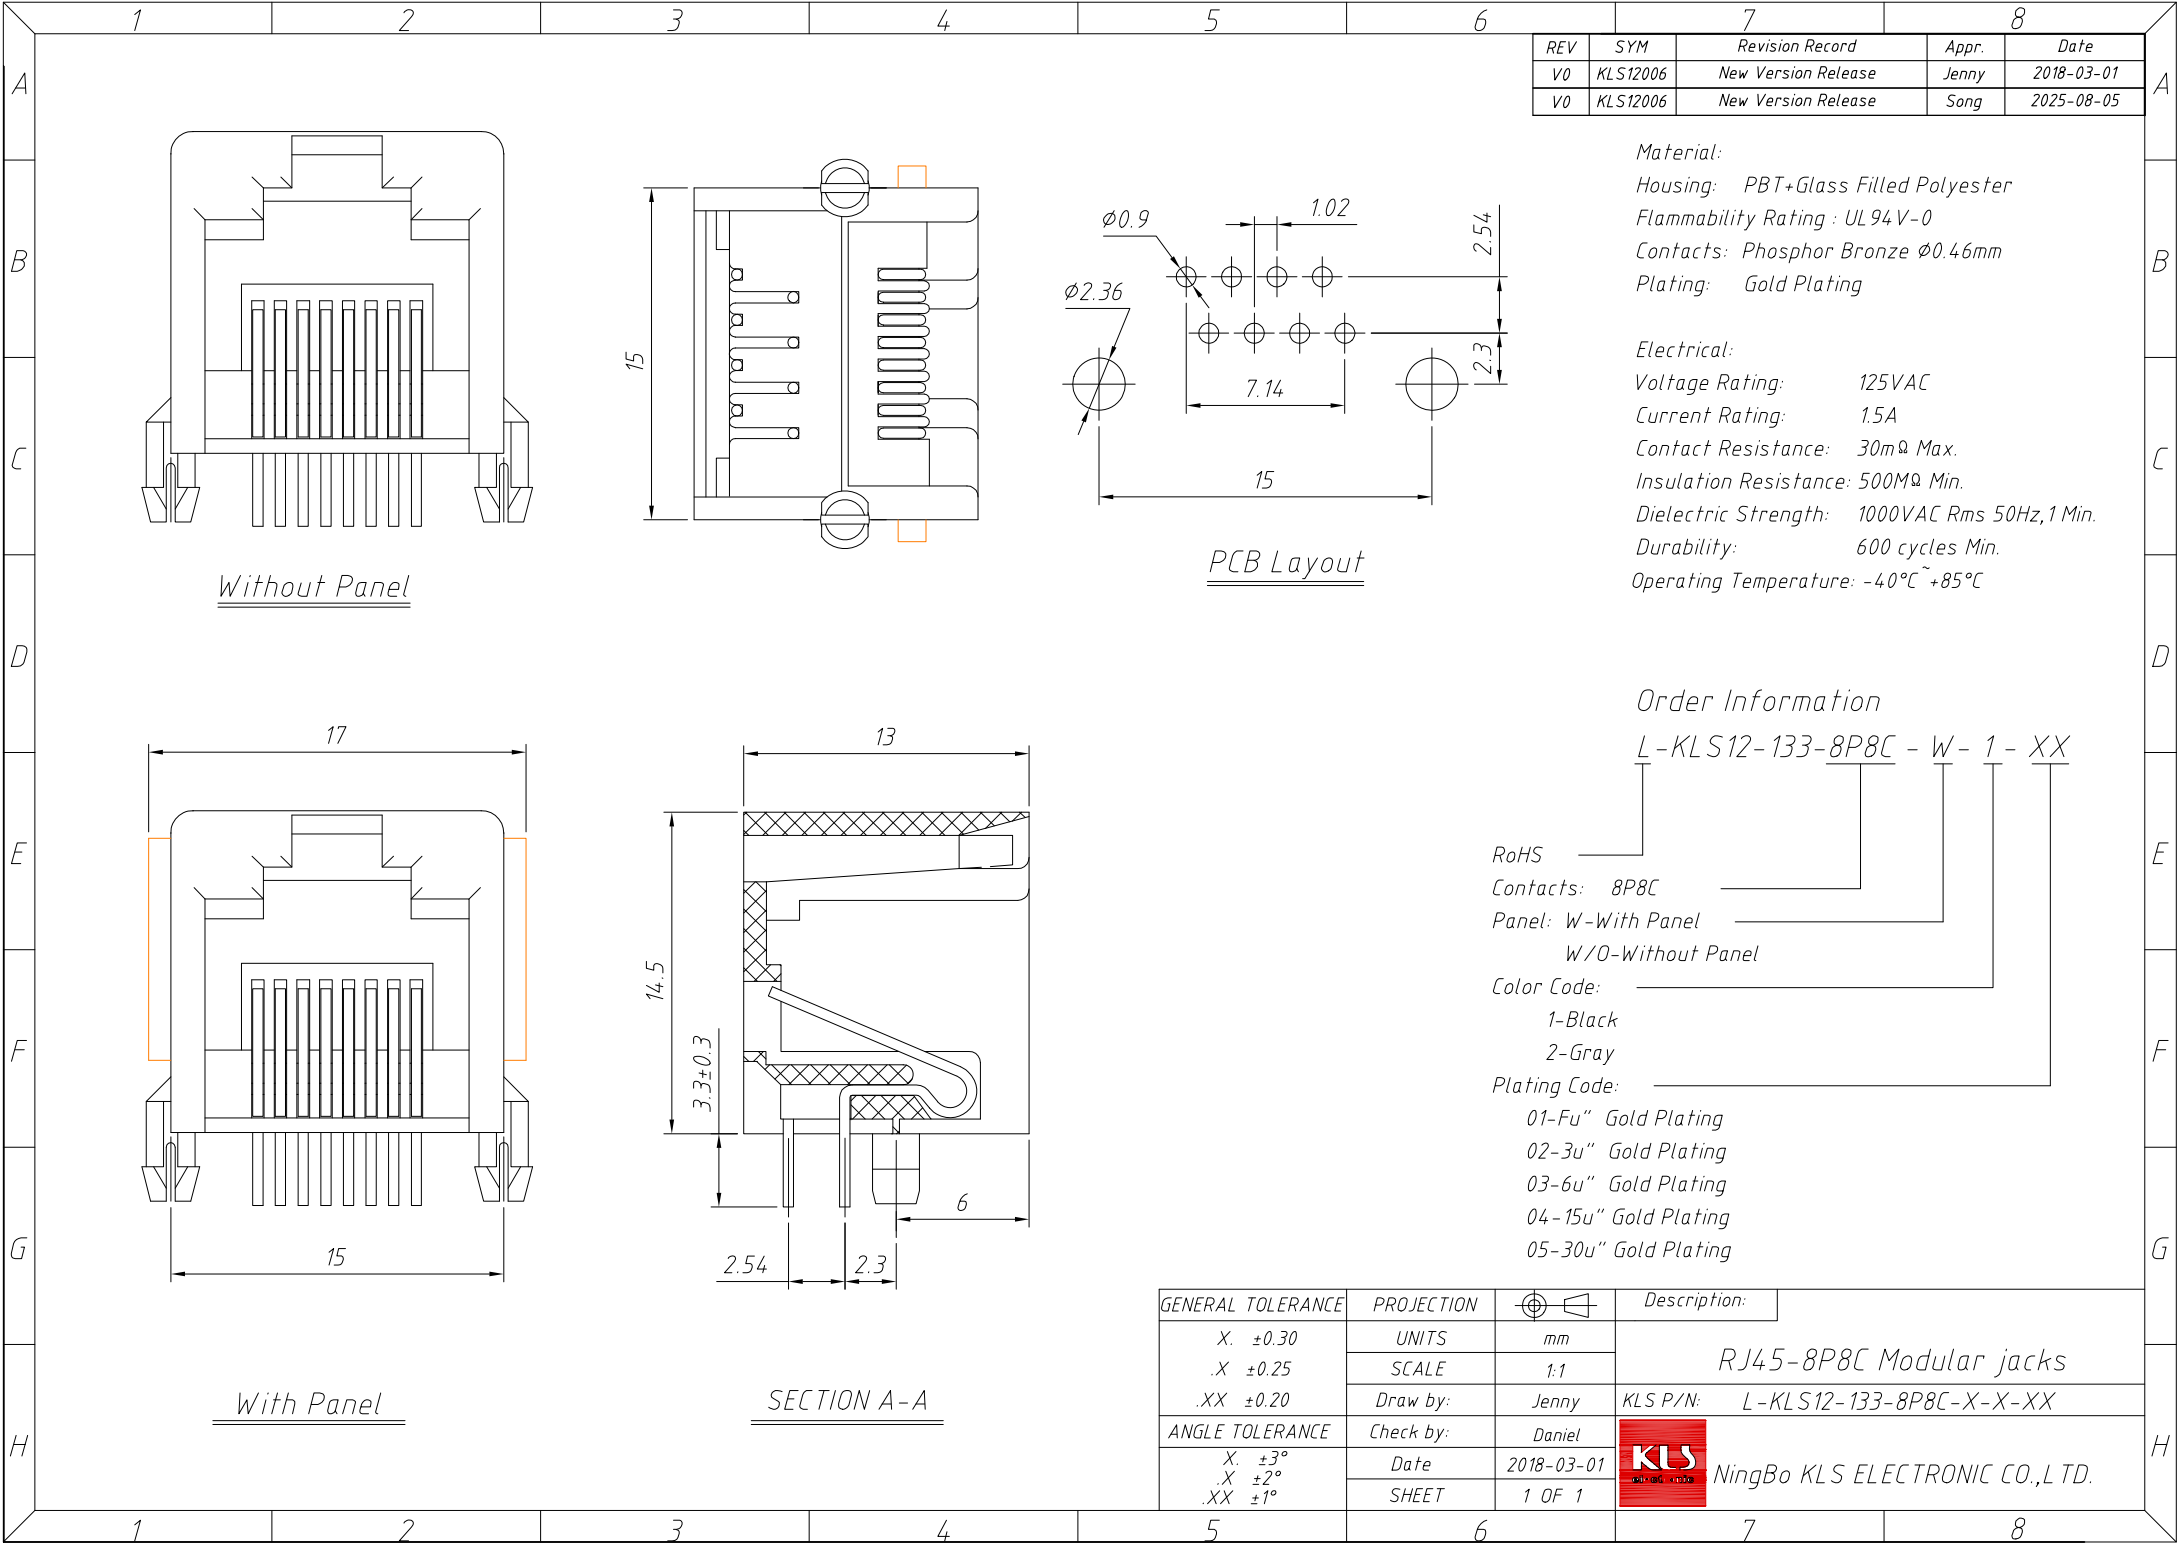

REV	SYM	Revision Record	Appr.	Date
V0	KLS12006	New Version Release	Jenny	2018-03-01
V0	KLS12006	New Version Release	Song	2025-08-05

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating : UL94 V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operating Temperature: -40°C ~ +85°C

Order Information
L-KLS12-133-8P8C - W - 1 - XX

RoHS
Contacts: 8P8C
Panel: W-With Panel
W/O-Without Panel
Color Code:
1-Black
2-Gray
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

GENERAL TOLERANCE	PROJECTION	Description:
X. ± 0.30	UNITS	mm
.X ± 0.25	SCALE	1:1
.XX ± 0.20	Draw by:	Jenny
ANGLE TOLERANCE	Check by:	Daniel
X. $\pm 3^\circ$	Date	2018-03-01
.X $\pm 2^\circ$	SHEET	1 OF 1
.XX $\pm 1^\circ$		



NingBo KLS ELECTRONIC CO.,LTD.