


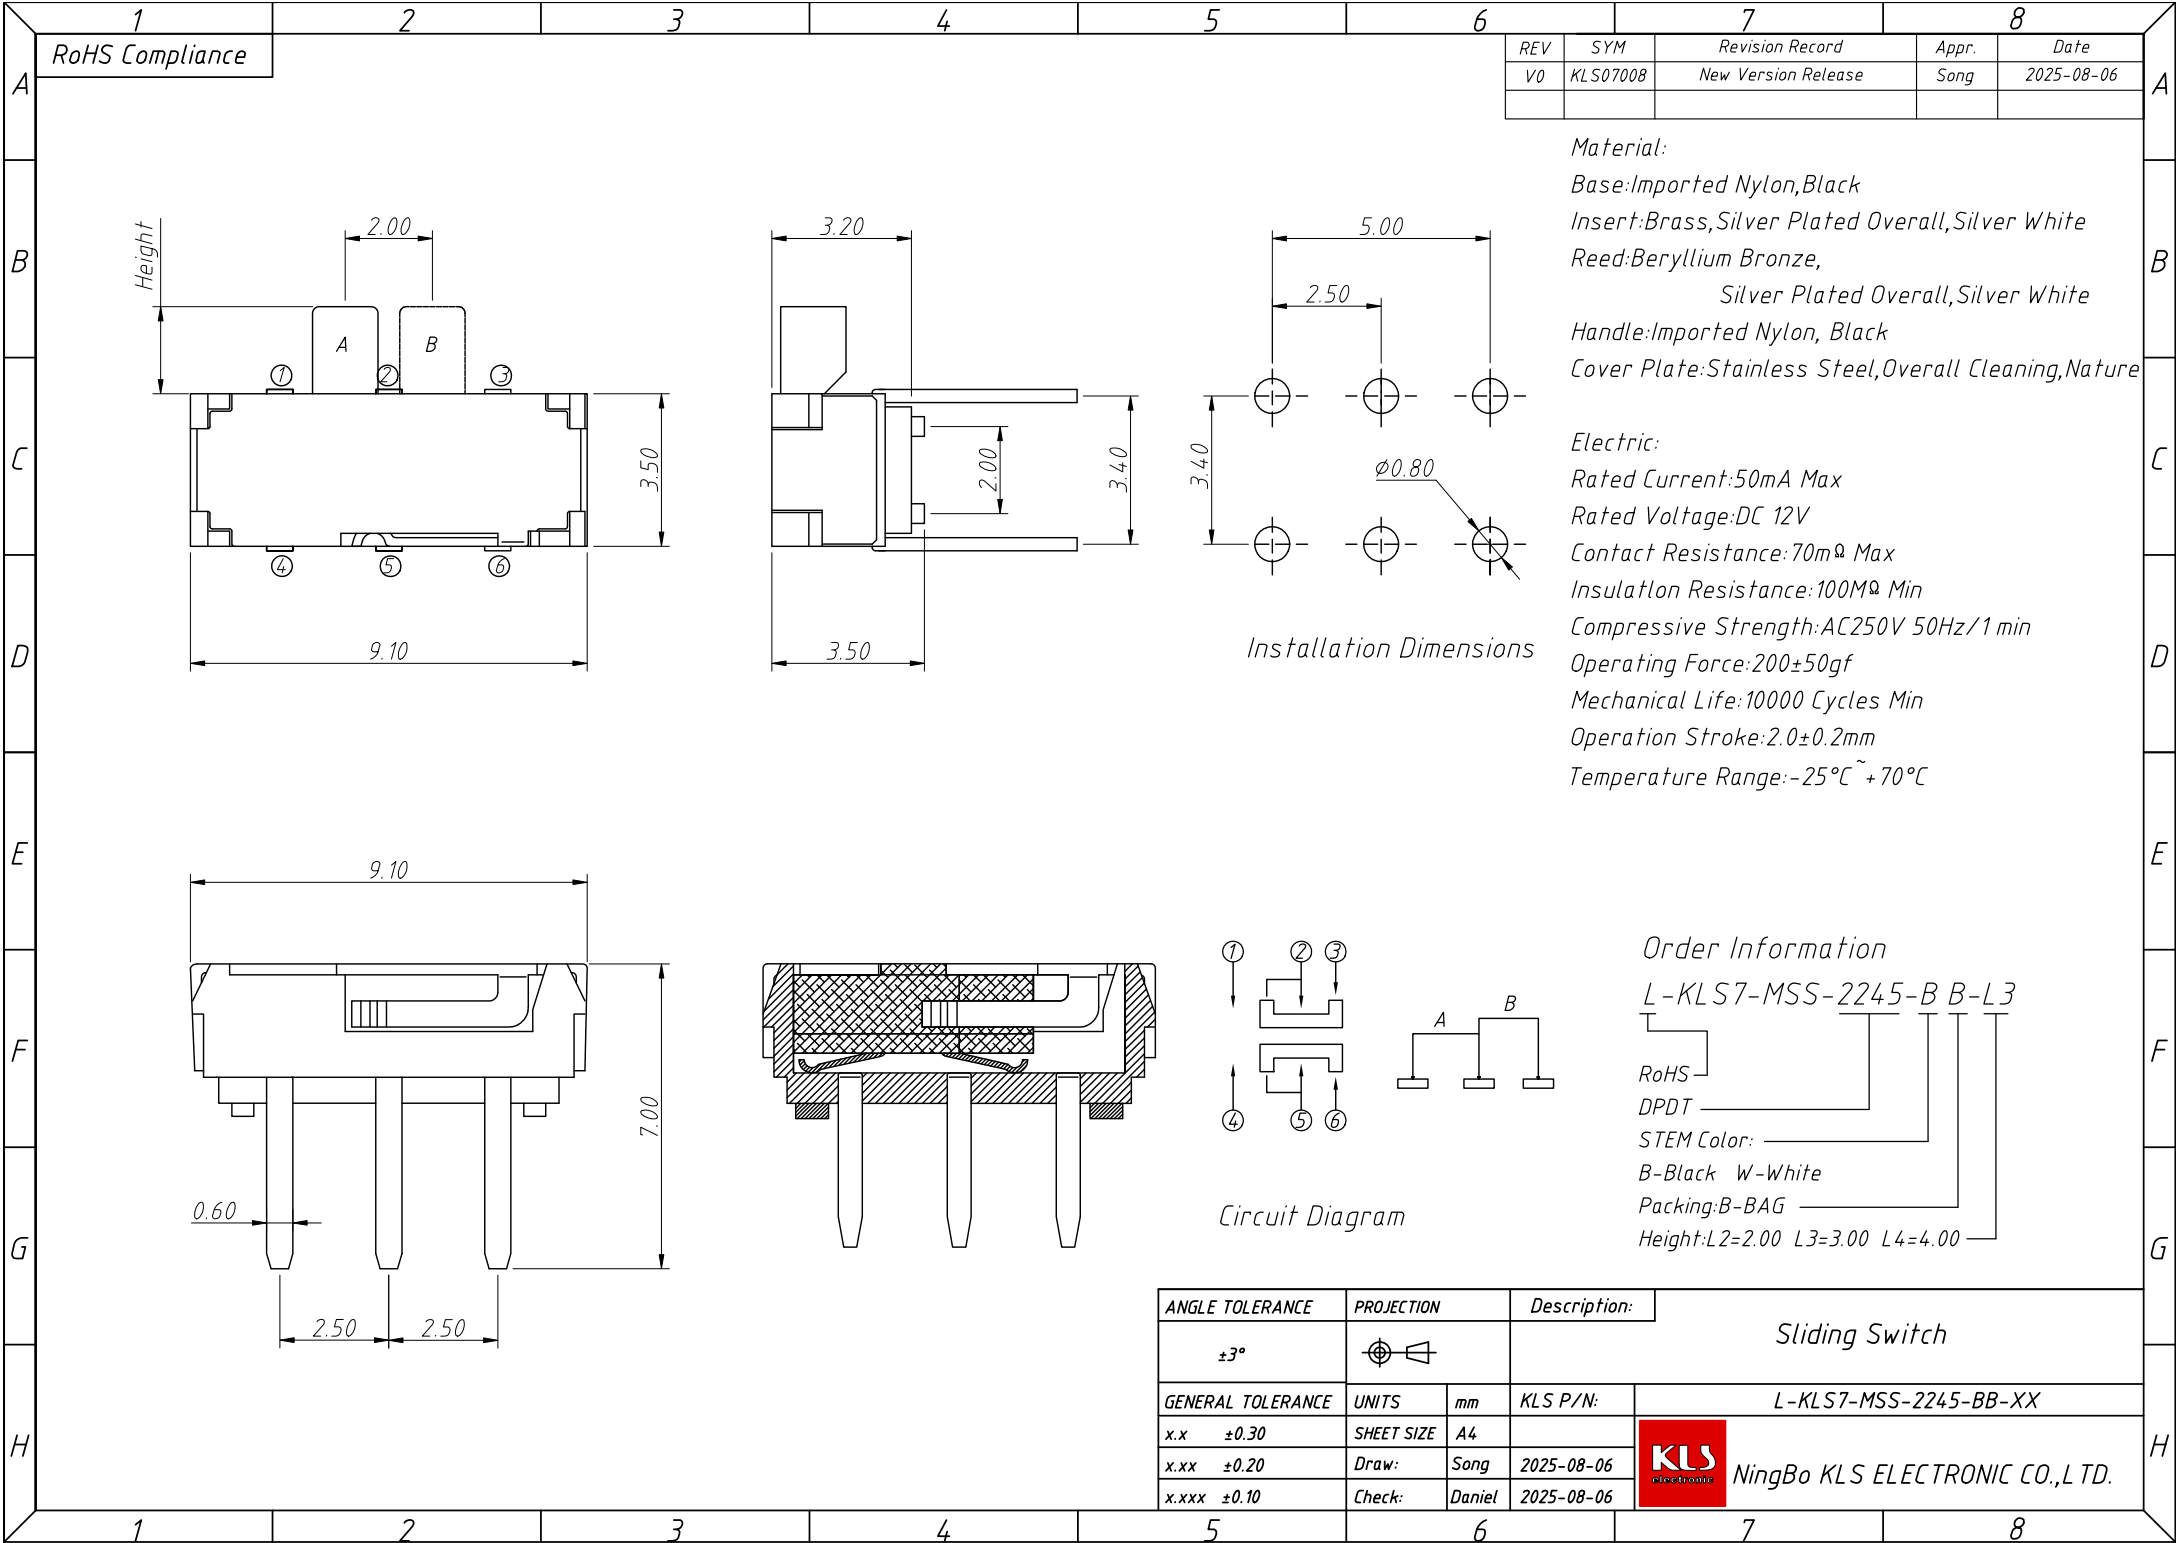

1
RoHS Compliance

7		8	
REV	SYM	Revision Record	Appr.
V0	KLS07008	New Version Release	Song
		Date	2025-08-06

Material:
Base:Imported Nylon,Black
Insert:Brass,Silver Plated Overall,Silver White
Reed:Beryllium Bronze,
Silver Plated Overall,Silver White
Handle:Imported Nylon, Black
Cover Plate:Stainless Steel,Overall Cleaning,Nature

Electric:
Rated Current:50mA Max
Rated Voltage:DC 12V
Contact Resistance:70m Ω Max
Insulation Resistance:100M Ω Min
Compressive Strength:AC250V 50Hz/1 min
Operating Force:200 $\pm$ 50gf
Mechanical Life:10000 Cycles Min
Operation Stroke:2.0 $\pm$ 0.2mm
Temperature Range:-25 $^{\circ}$ C ~ +70 $^{\circ}$ C

Order Information
L-KLS7-MSS-2245-B B-L3
RoHS
DPDT
STEM Color:
B-Black W-White
Packing:B-BAG
Height:L2=2.00 L3=3.00 L4=4.00

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				Sliding Switch	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x ± 0.30		SHEET SIZE	A4	L-KLS7-MSS-2245-BB-XX	
x.xx ± 0.20		Draw:	Song	2025-08-06	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ± 0.10		Check:	Daniel	2025-08-06	