


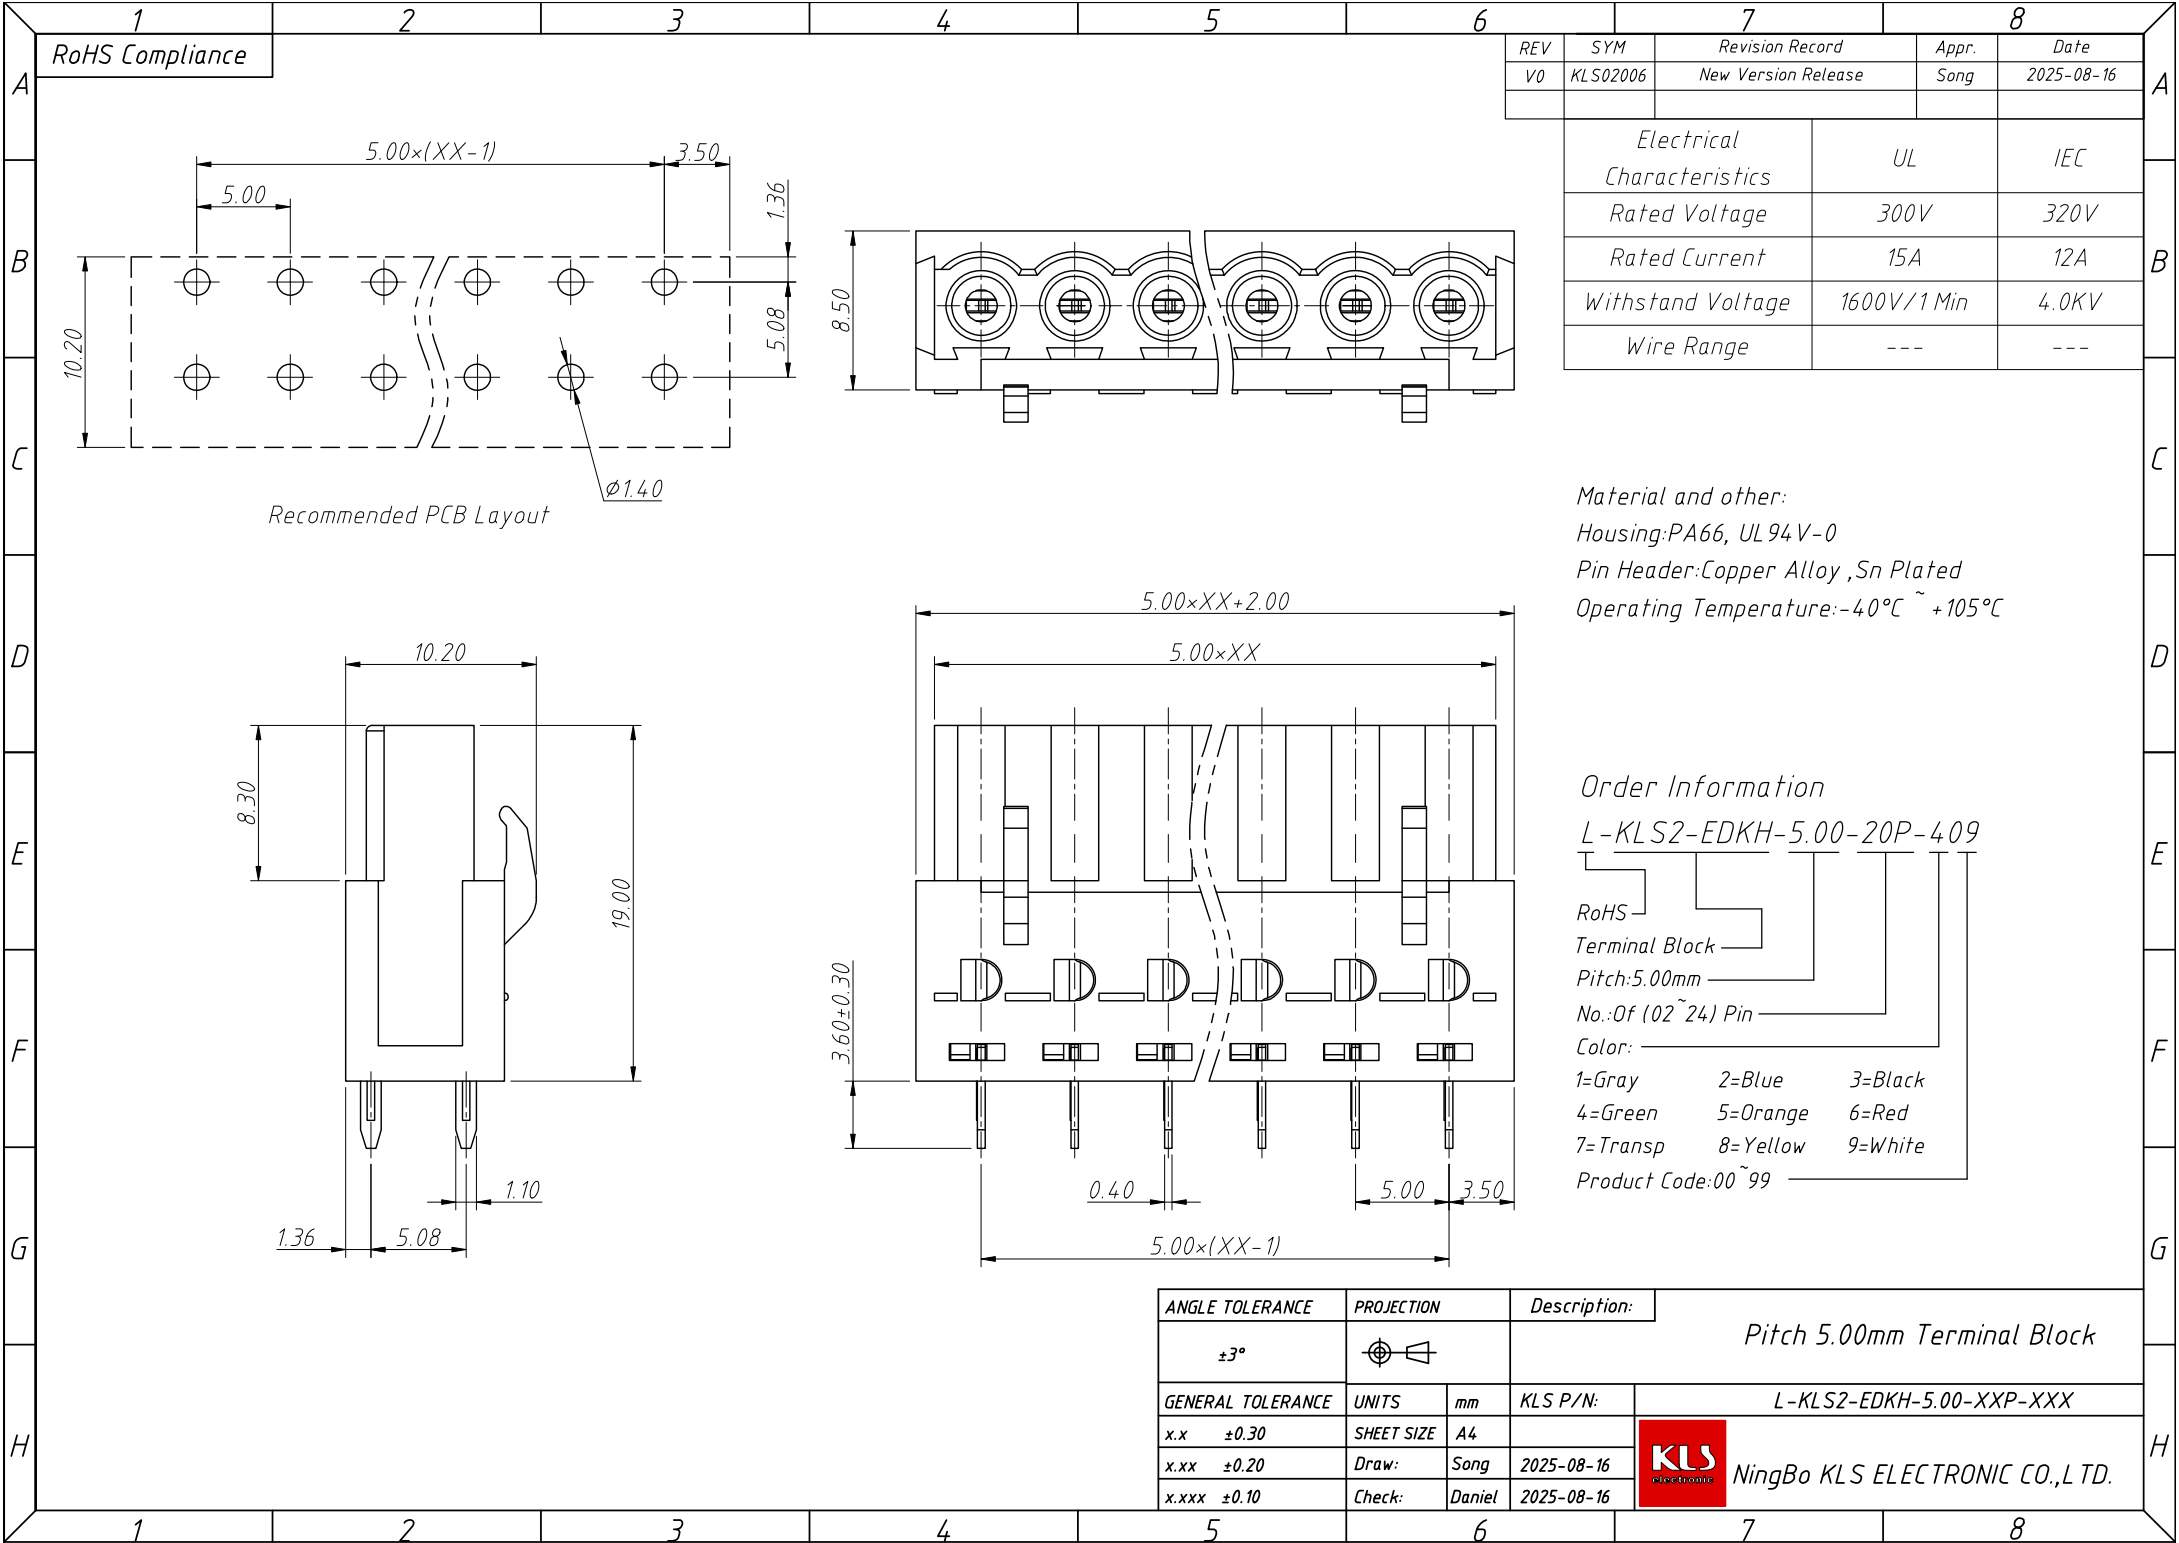

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Song	2025-08-16

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	15A	12A
Withstand Voltage	1600V/1 Min	4.0KV
Wire Range	---	---

Material and other:
Housing:PA66, UL 94 V-0
Pin Header:Copper Alloy ,Sn Plated
Operating Temperature:-40°C ~ +105°C

Order Information
L-KLS2-EDKH-5.00-20P-409

RoHS
Terminal Block
Pitch:5.00mm
No.:Of (02~24) Pin
Color:

1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Product Code:00~99

ANGLE TOLERANCE	PROJECTION	Description:	Pitch 5.00mm Terminal Block
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS2-EDKH-5.00-XXP-XXX
x.xx ±0.20	Draw:	Song	2025-08-16
x.xxx ±0.10	Check:	Daniel	2025-08-16

