


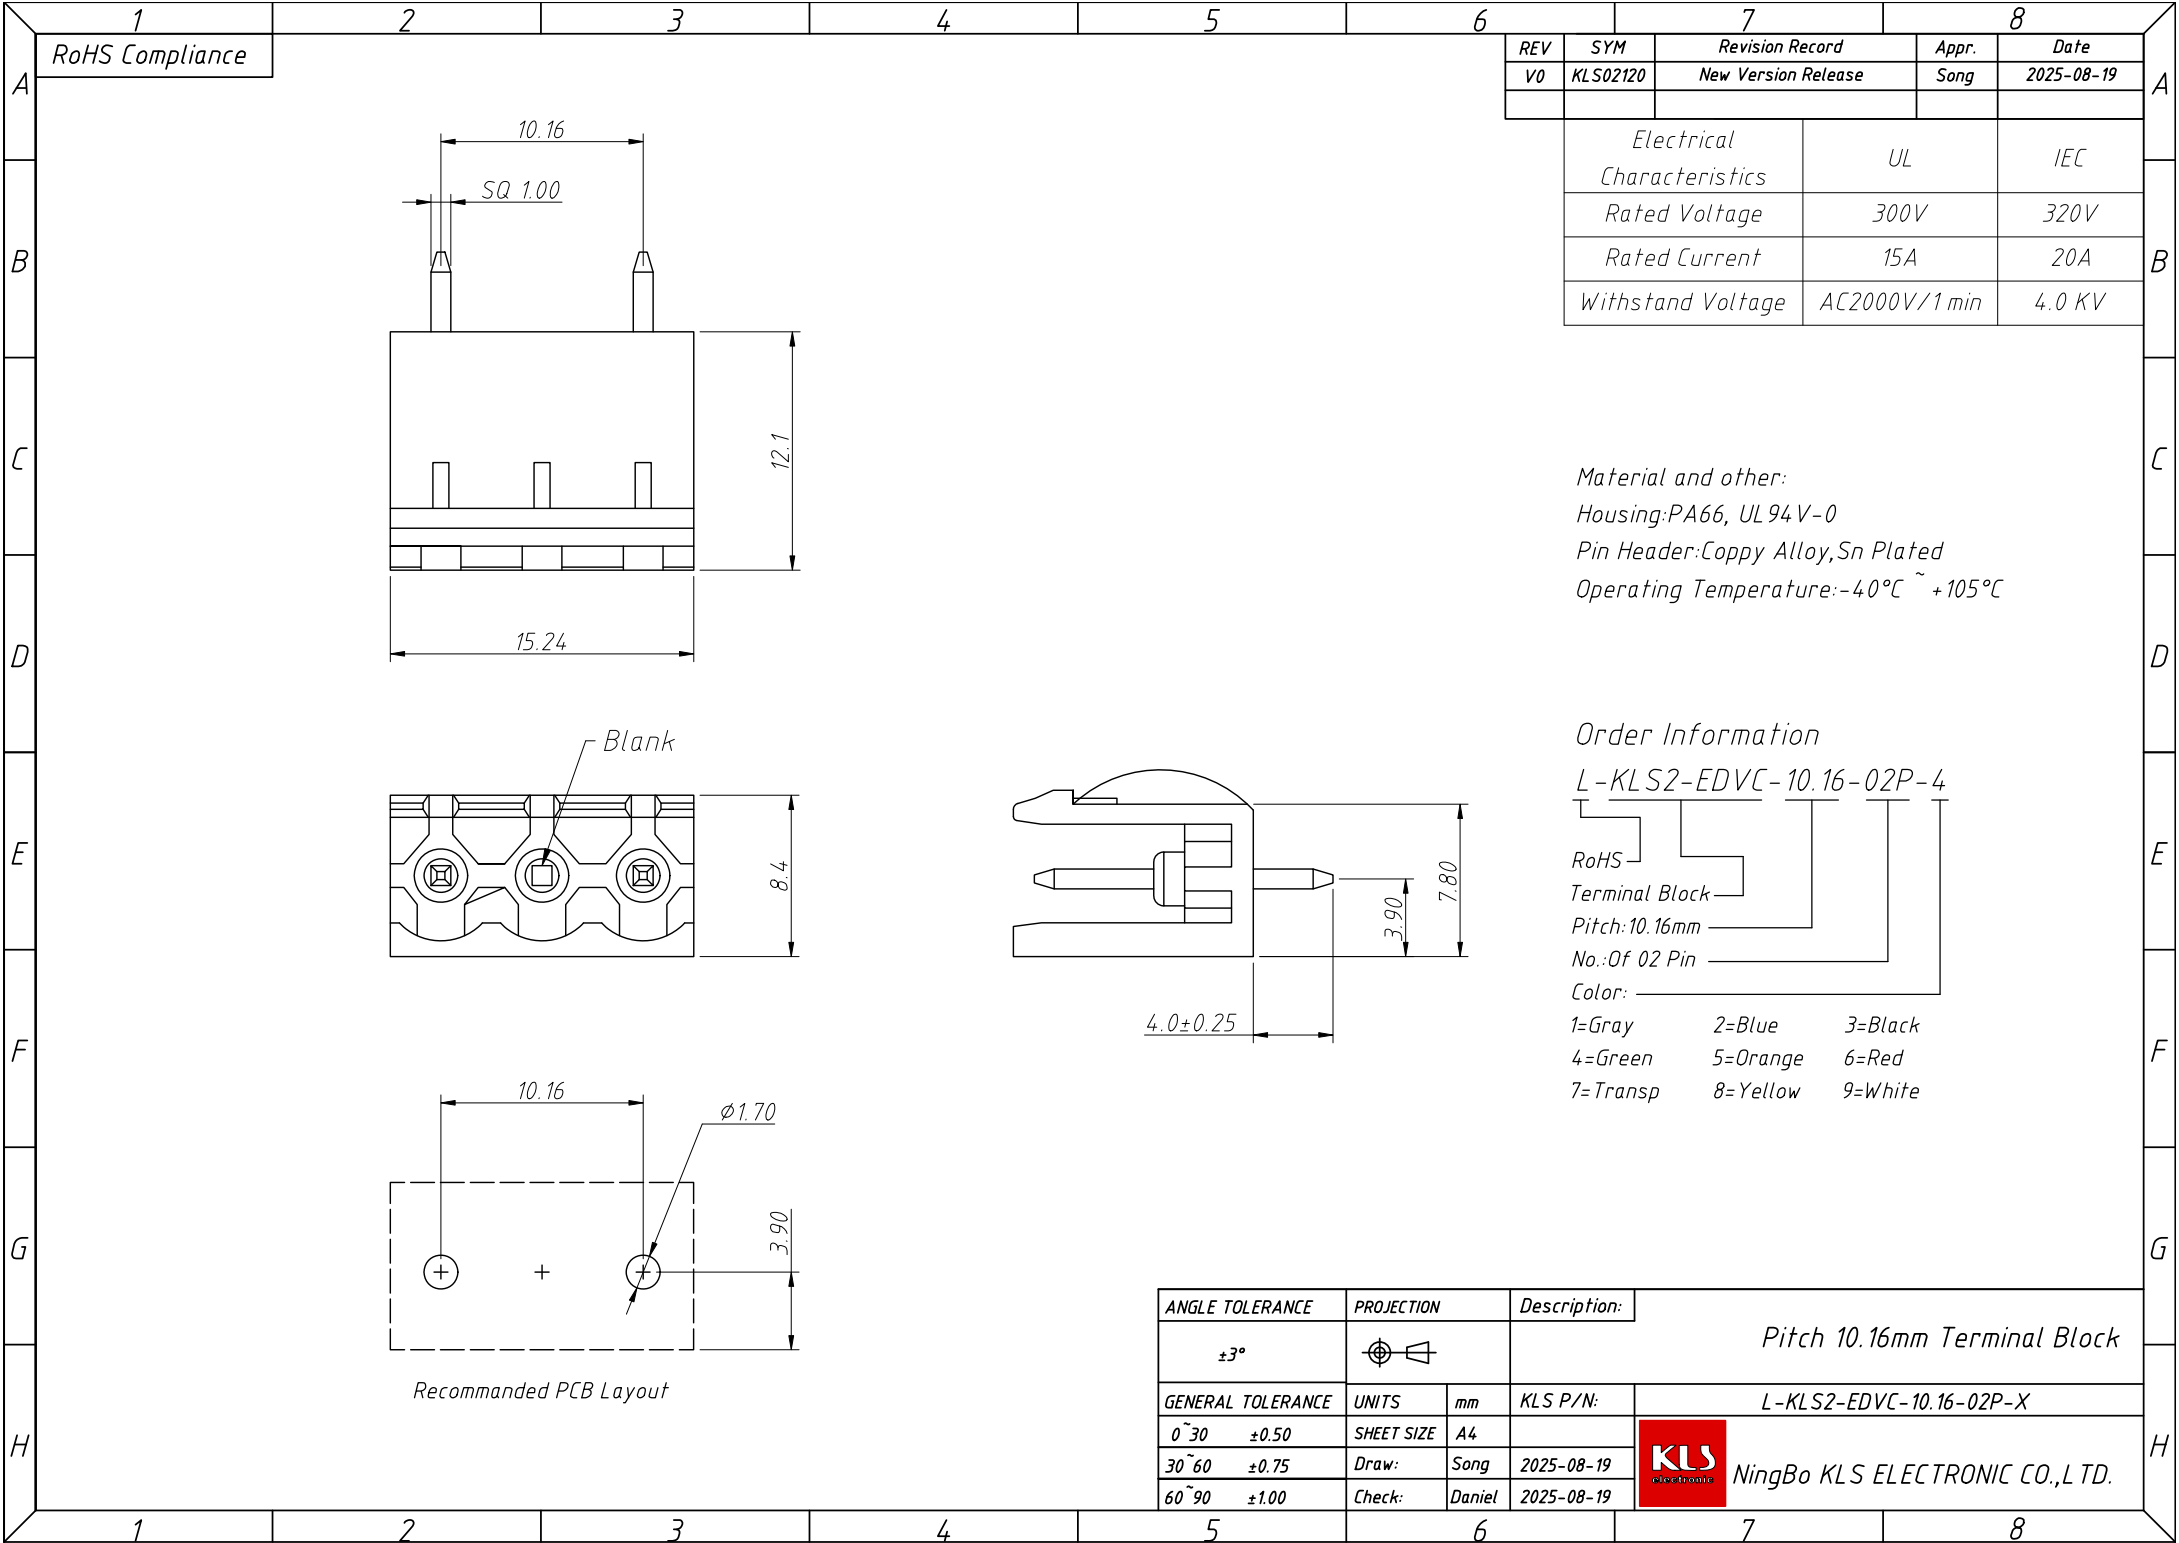

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS02120	New Version Release		Song	2025-08-19
		Electrical Characteristics		UL	IEC
		Rated Voltage		300V	320V
		Rated Current		15A	20A
		Withstand Voltage		AC2000V/1 min	4.0 KV

Material and other:
Housing:PA66, UL 94 V-0
Pin Header:Coppy Alloy,Sn Plated
Operating Temperature:-40°C ~ +105°C

Order Information
L-KLS2-EDVC-10.16-02P-4

RoHS

Terminal Block

Pitch:10.16mm

No.:Of 02 Pin

Color:

1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Pitch 10.16mm Terminal Block	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
0~30		±0.50	SHEET SIZE	A4	L-KLS2-EDVC-10.16-02P-X
30~60		±0.75	Draw:	Song	NingBo KLS ELECTRONIC CO.,L TD.
60~90		±1.00	Check:	Daniel	