


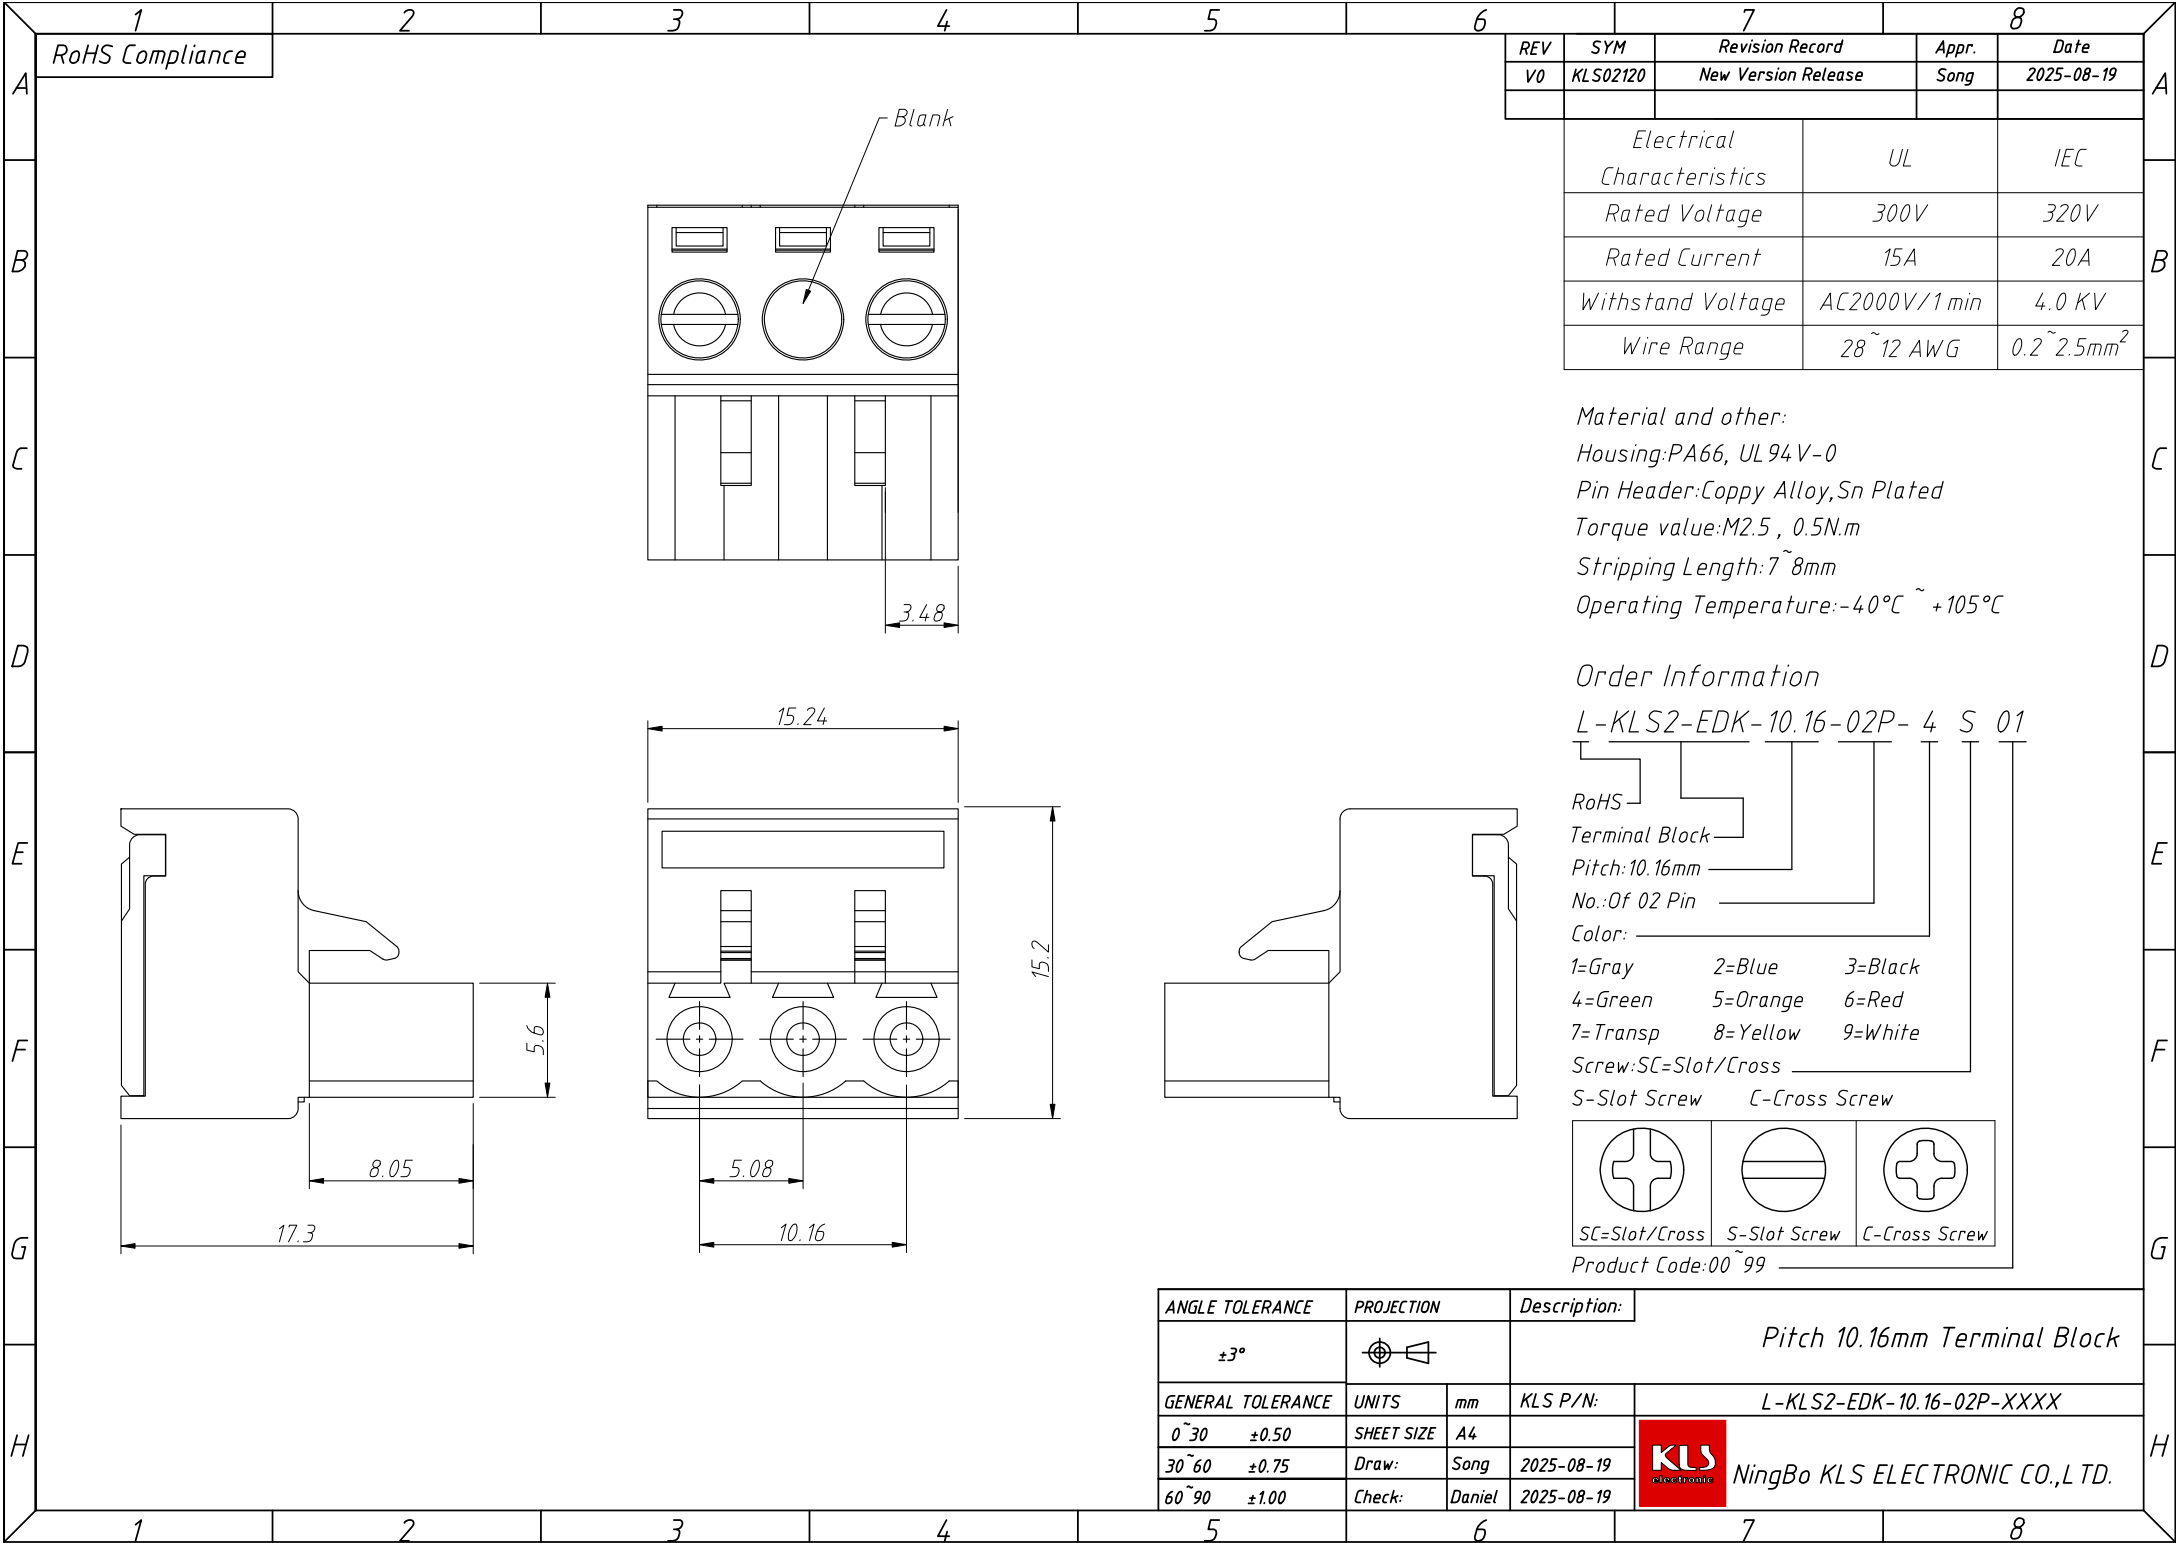

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02120	New Version Release	Song	2025-08-19

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	15A	20A
Withstand Voltage	AC2000V/1 min	4.0 KV
Wire Range	28~12 AWG	0.2~2.5mm ²

Material and other:
Housing:PA66, UL 94 V-0
Pin Header:Coppy Alloy,Sn Plated
Torque value:M2.5 , 0.5N.m
Stripping Length:7~8mm
Operating Temperature:-40°C ~ +105°C

Order Information
L-KLS2-EDK-10.16-02P-4 S 01
RoHS
Terminal Block
Pitch:10.16mm
No.:Of 02 Pin
Color:
1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw
SC=Slot/Cross S-Slot Screw C-Cross Screw
Product Code:00~99

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 10.16mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30 ±0.50	SHEET SIZE	A4
30~60 ±0.75	Draw:	Song
60~90 ±1.00	Check:	Daniel

2025-08-19	2025-08-19	2025-08-19
------------	------------	------------

KLS	NingBo KLS ELECTRONIC CO.,L TD.
-----	---------------------------------