


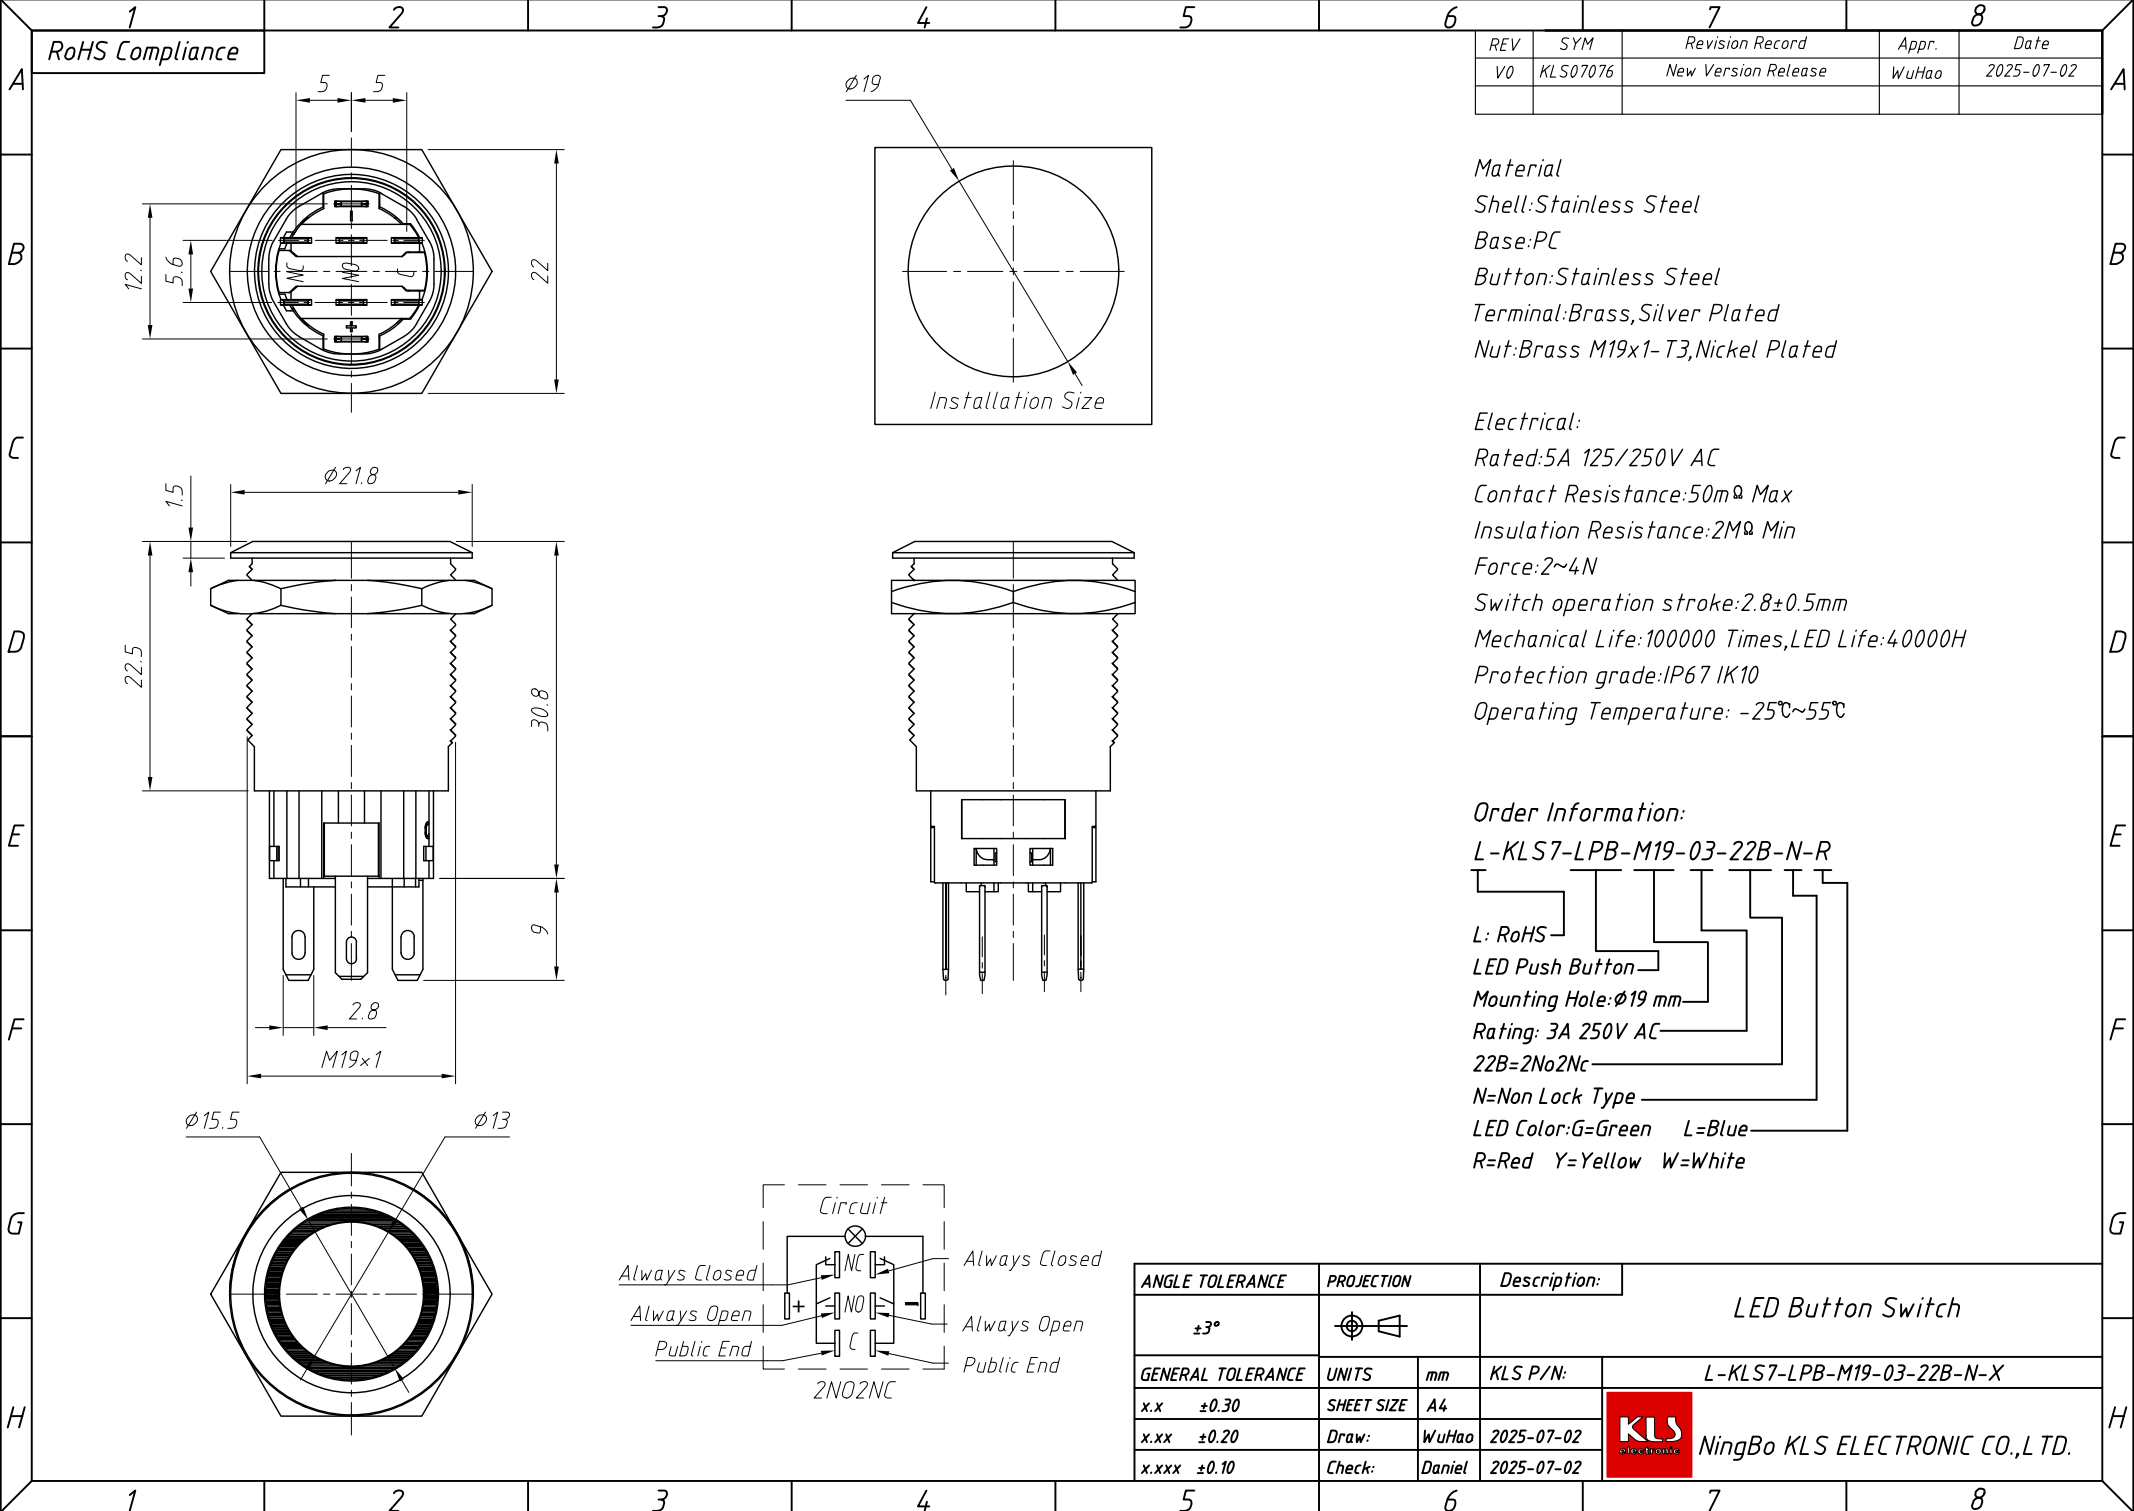

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS07076	New Version Release	WuHao	2025-07-02

Material
Shell:Stainless Steel
Base:PC
Button:Stainless Steel
Terminal:Brass,Silver Plated
Nut:Brass M19x1- T3,Nickel Plated

Electrical:
Rated:5A 125/250V AC
Contact Resistance:50mΩ Max
Insulation Resistance:2MΩ Min
Force:2~4N
Switch operation stroke:2.8±0.5mm
Mechanical Life:100000 Times,LED Life:40000H
Protection grade:IP67 IK10
Operating Temperature: -25℃~55℃

Order Information:
L-KLS7-LPB-M19-03-22B-N-R
L: RoHS
LED Push Button
Mounting Hole:φ19 mm
Rating: 3A 250V AC
22B=2No2Nc
N=Non Lock Type
LED Color:G=Green L=Blue
R=Red Y=Yellow W=White

ANGLE TOLERANCE	PROJECTION	Description:
±3°		LED Button Switch
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao
x.xxx ±0.10	Check:	Daniel
KLS P/N:		L-KLS7-LPB-M19-03-22B-N-X
		NingBo KLS ELECTRONIC CO.,L TD.