
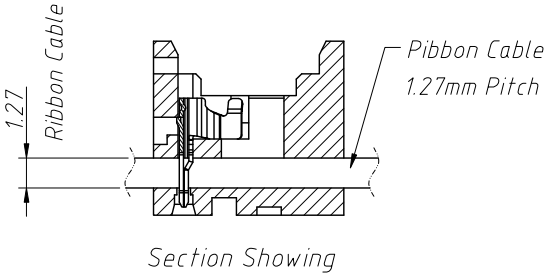



Material:
Housing:PBT Glass filled, UL 94 V-0,White
Contacts: Phosphor Bronze,G/F

Electrical Characteristics:
Current Rating: 1.0 AMP
Contact Resistance:20mΩ Max.
Insulation resistance:1000MΩ Min
Withstand Voltage: 500V AC / Minute
Operating Temperature: -40℃ ~+105℃

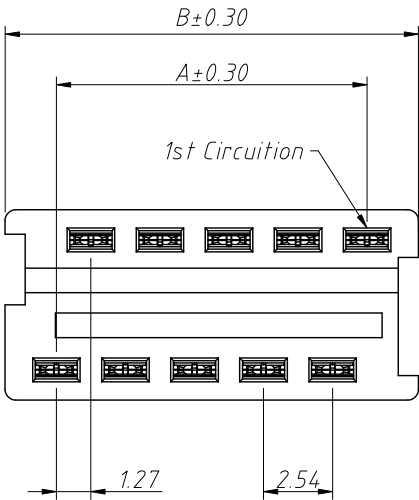

Order Information:
L-KLS1-206- 16-W-G0
L: RoHS
IDC connectors
1.27mm Pitch
XX-No.of 04 ~26pin
Color: W=White
Plating: G0=Gold Flash

Pin	A	B	Pin	A	B
04	3.81	7.59	16	19.05	22.83
06	6.35	10.13	18	21.59	25.37
08	8.89	12.67	20	24.13	27.91
10	11.43	15.21	22	26.67	30.45
12	13.97	17.75	24	29.21	32.99
14	16.51	20.29	26	31.75	35.53



ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 1.27mm Closed End IDC Connector
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Song
x.xxx ±0.10	Check:	Daniel
		KLS P/N: L-KLS1-206-XX-W-G0
		NingBo KLS ELECTRONIC CO.,L TD.