


NingBo KLS ELECTRONIC CO.,LTD.

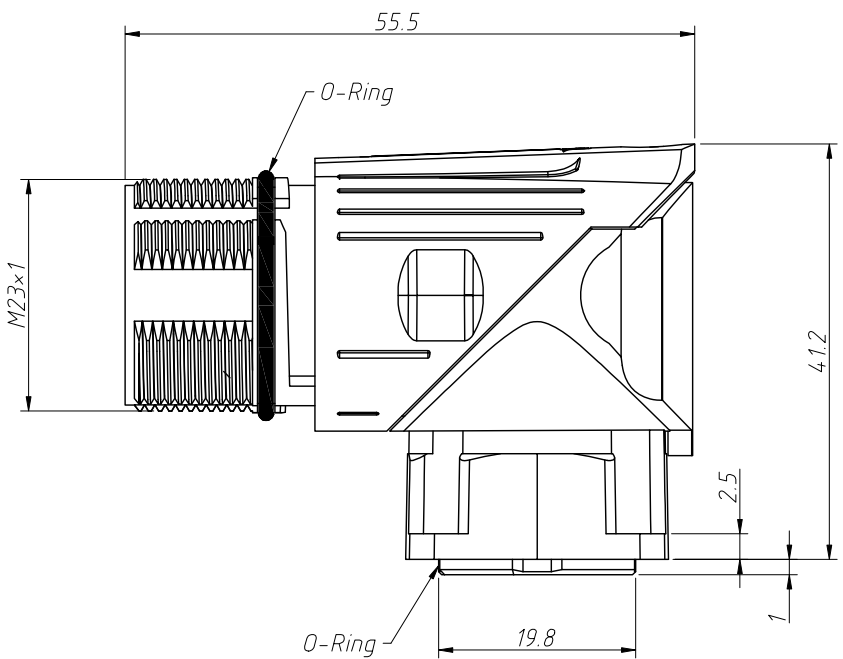

Order Information

L-KLS15-223-M623-17A-M2

RoHS ☐

Pos No.


Number of Pins

Type Ordering

Material:
Shell: Zinc Alloys, Nickel plate
Insert: PA66+GF20%
Contact: Copper, Silver/Gold Plated

Coupling: Threaded coupling
Termination: Solder/Crimping
Mating: 500 Cycles
Temperature range: -25℃ ~ +85℃
Cable diameter: Ø4.0mm ~ Ø8.0mm

The hole place arranges(Comply with the needle direction)

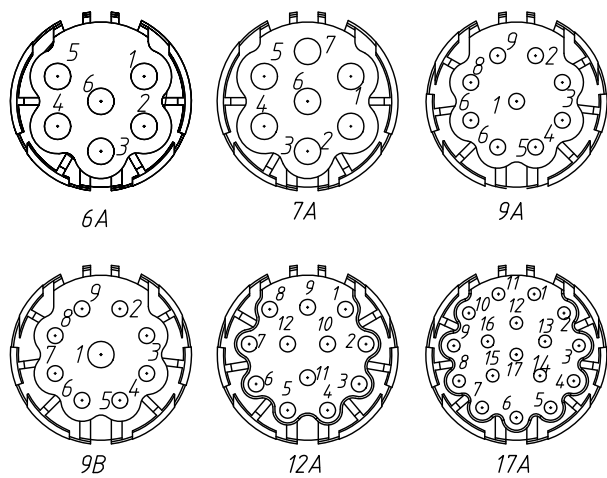

Number of Pins	6A	7A	9A	9B	12A	17A
Rated Current/Voltage	20A/300V	20A/300V	8A/300V	8A/260V 20A/300V	8A/260V	8A/260V
Operation limit voltage (AC.V.rms)	250	250	250	200	200	200
Withstand Voltage (AC.V.rms) 1minutes	2500	2500	2500	2500	2500	2500
Insulation Resistance (MΩ) Min At DC 500V	10 ¹⁰	10 ¹⁰	10 ¹⁰	10 ¹⁰	10 ¹⁰	10 ¹⁰
Contact Resistance (MΩ) At DC 1A	3	3	3	3	3	3
Solder cup mouth aperture	2.4	2.4	1.3	1.3/2.4	1.3	1.3
Solder inter diameter	2	2	1	1×8/2×1	1	1

ANGLE TOLERANCE	PROJECTION	Description:
±3°		M23 Circular connector M623 Type
GENERAL TOLERANCE	UNITS	mm
.x ±0.30	SHEET SIZE	A4
.xx ±0.20	Draw:	Song
.xxx ±0.10	Check:	Daniel

KLS

electronic

NingBo KLS ELECTRONIC CO.,L TD.