


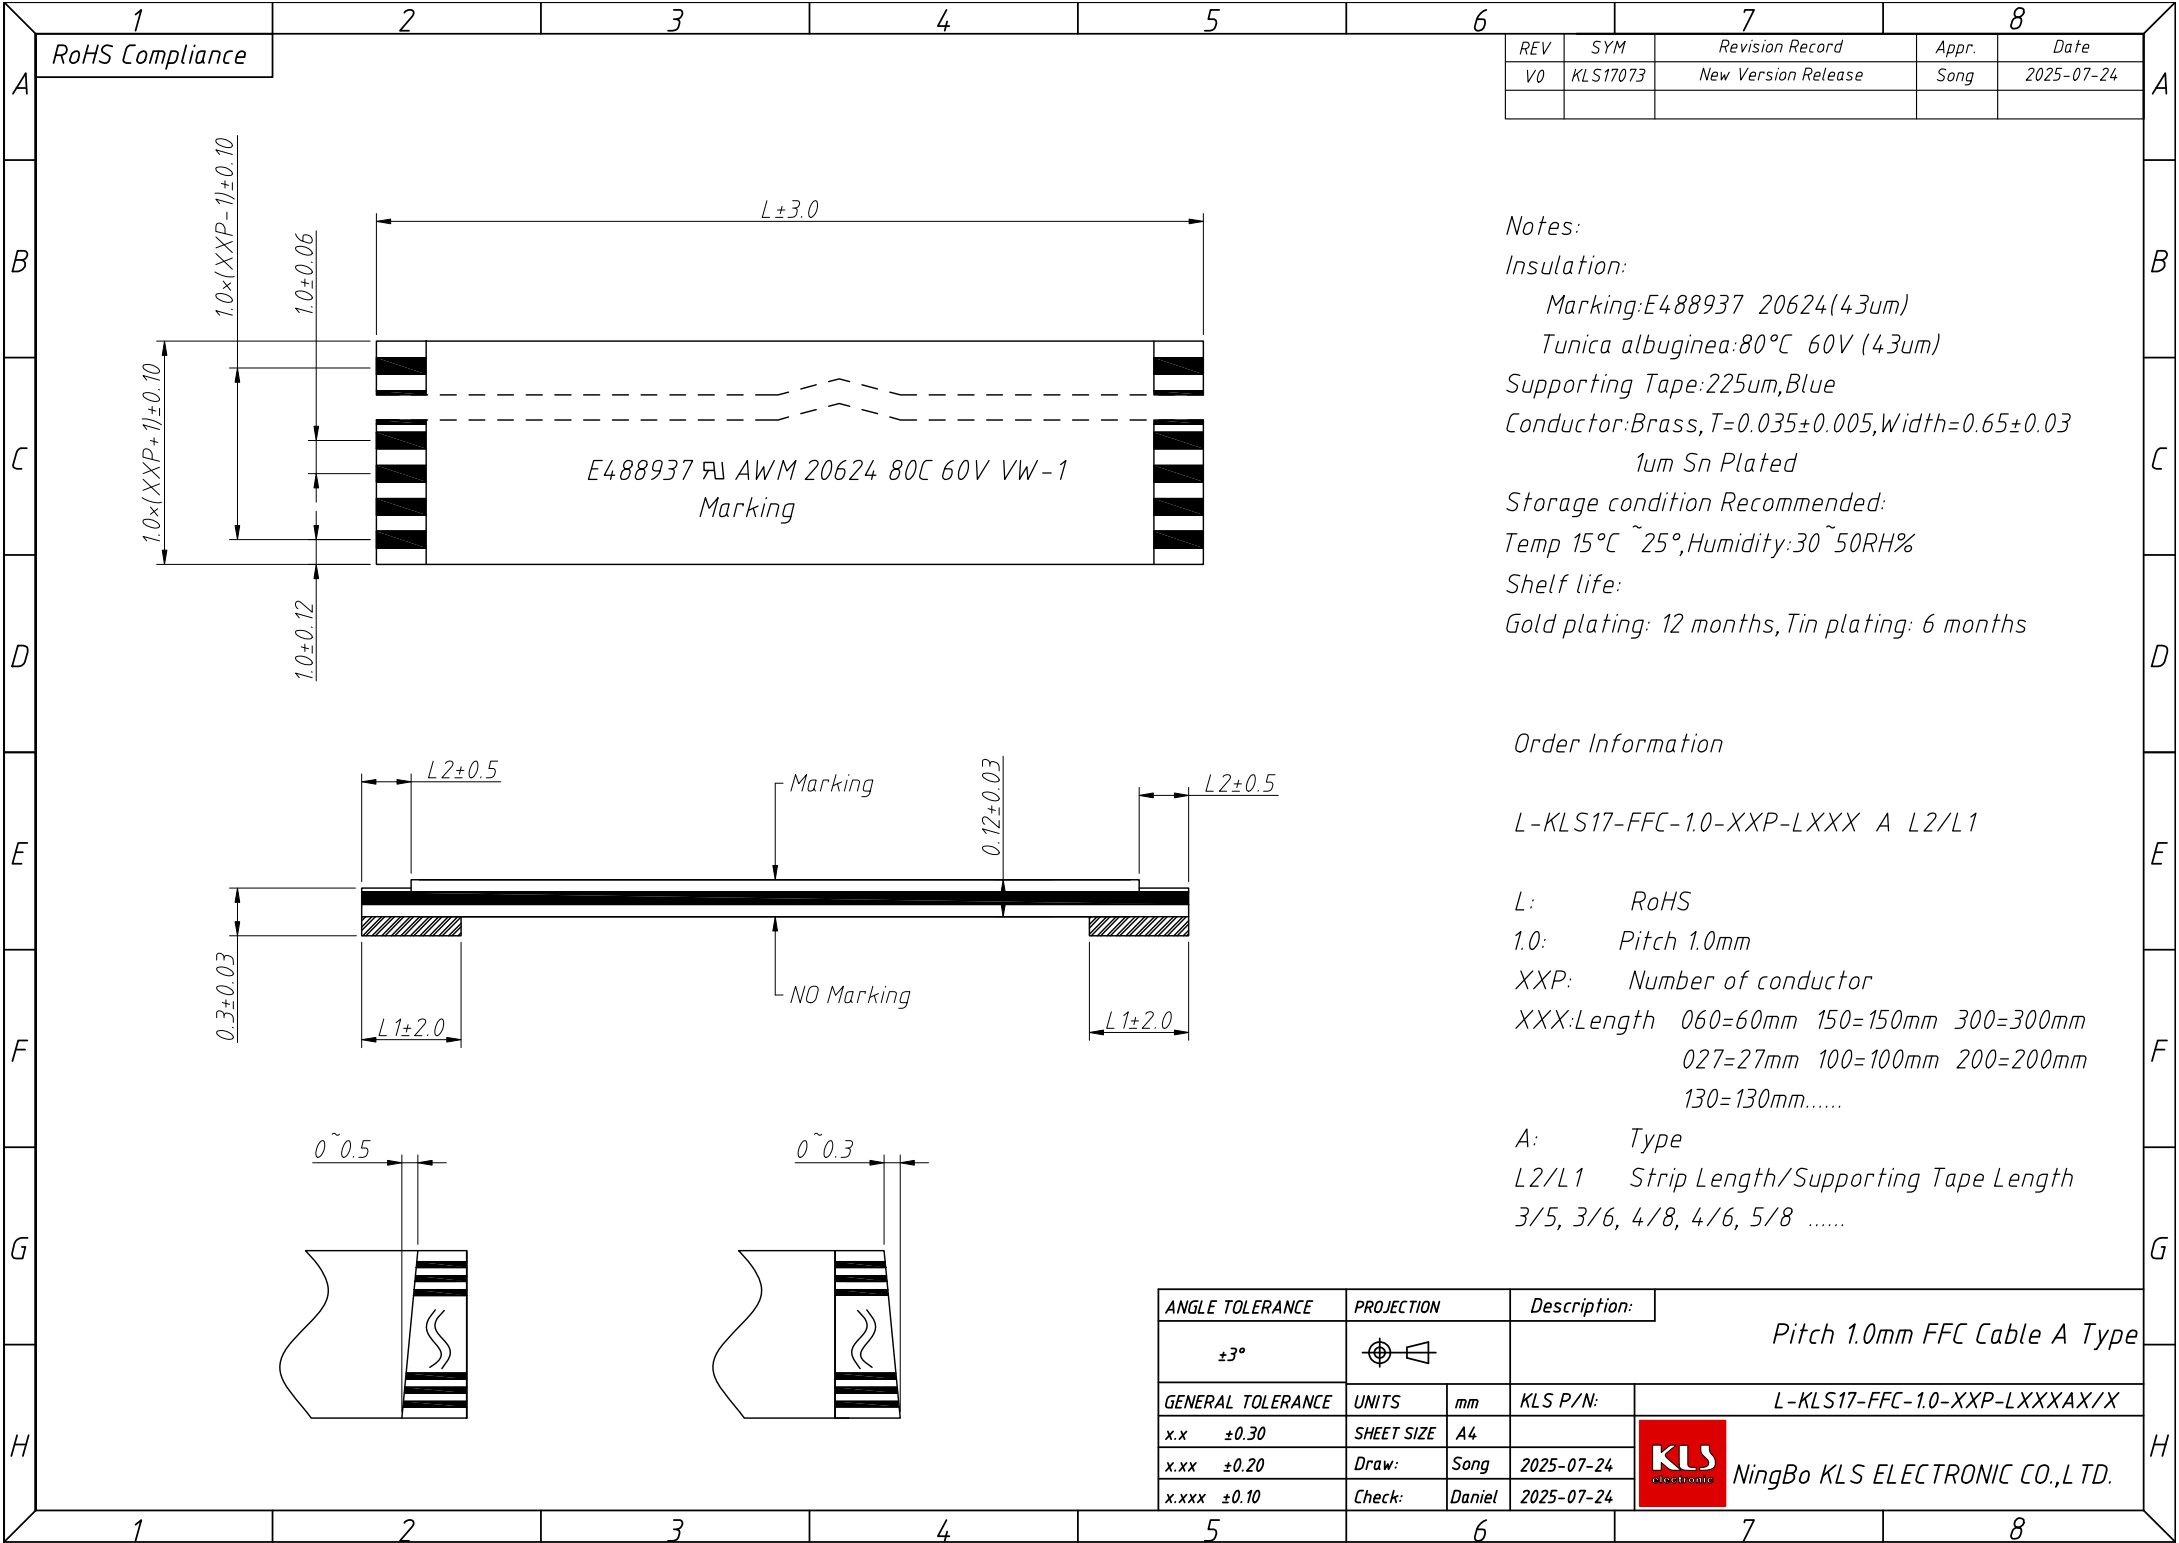

RoHS Compliance


REV	SYM	Revision Record	Appr.	Date
V0	KLS17073	New Version Release	Song	2025-07-24

Notes:
Insulation:
Marking:E488937 20624(43um)
Tunica albuginea:80°C 60V (43um)
Supporting Tape:225um,Blue
Conductor:Brass, T=0.035±0.005,Width=0.65±0.03
1um Sn Plated
Storage condition Recommended:
Temp 15°C ~ 25°,Humidity:30 ~ 50RH%
Shelf life:
Gold plating: 12 months,Tin plating: 6 months

Order Information
L-KLS17-FFC-1.0-XXP-LXXX A L2/L1
L: RoHS
1.0: Pitch 1.0mm
XXP: Number of conductor
XXX:Length 060=60mm 150=150mm 300=300mm
027=27mm 100=100mm 200=200mm
130=130mm.....
A: Type
L2/L1 Strip Length/Supporting Tape Length
3/5, 3/6, 4/8, 4/6, 5/8

ANGLE TOLERANCE	PROJECTION	Description:
$\pm 3^\circ$		Pitch 1.0mm FFC Cable A Type
GENERAL TOLERANCE	UNITS	mm
x.x ± 0.30	SHEET SIZE	A4
x.xx ± 0.20	Draw:	Song
x.xxx ± 0.10	Check:	Daniel

KLS	NingBo KLS ELECTRONIC CO.,L TD.
-----	---------------------------------

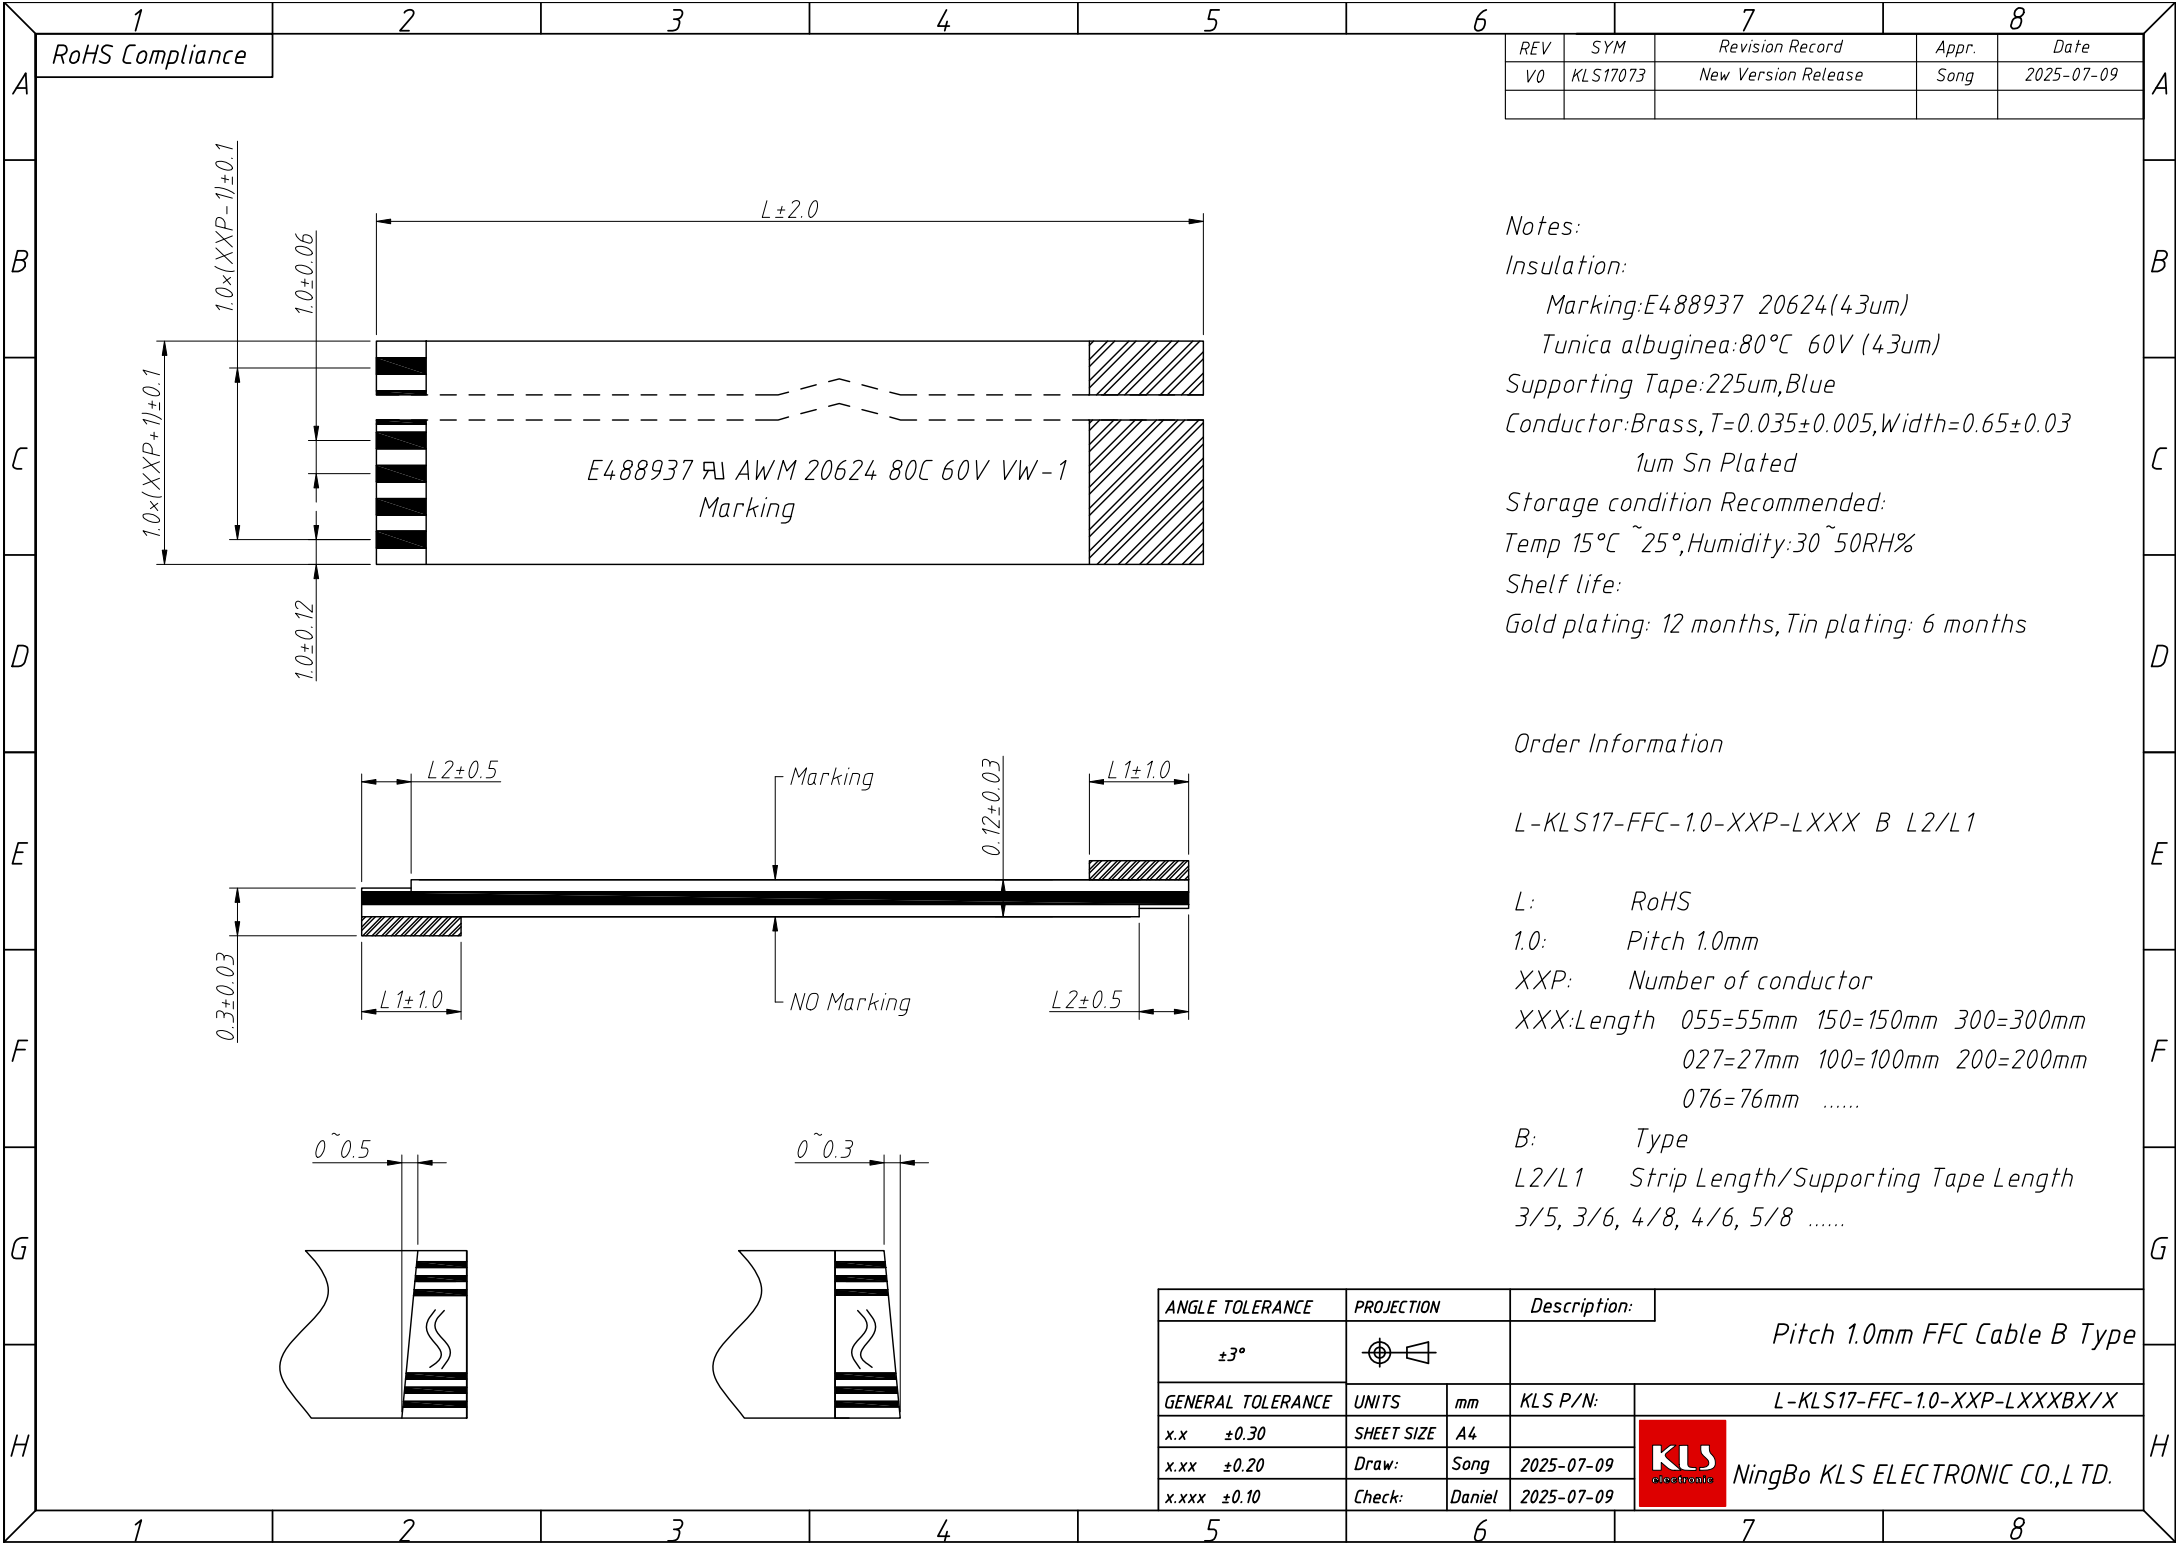

REV	SYM	Revision Record	Appr.	Date
V0	KLS17073	New Version Release	Song	2025-07-09

Notes:

Insulation:

Marking:E488937 20624(43um)

Tunica albuginea:80°C 60V (43um)

Supporting Tape:225um,Blue

Conductor:Brass, T=0.035±0.005,Width=0.65±0.03

1um Sn Plated

Storage condition Recommended:

Temp 15°C ~ 25°,Humidity:30 ~ 50RH%

Shelf life:

Gold plating: 12 months,Tin plating: 6 months

Order Information

L-KLS17-FFC-1.0-XXP-LXXX B L2/L1

L: RoHS

1.0: Pitch 1.0mm

XXP: Number of conductor

XXX:Length 055=55mm 150=150mm 300=300mm

027=27mm 100=100mm 200=200mm


076=76mm

B: Type

L2/L1 Strip Length/Supporting Tape Length

3/5, 3/6, 4/8, 4/6, 5/8

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				Pitch 1.0mm FFC Cable B Type	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x ± 0.30		SHEET SIZE	A4	L-KLS17-FFC-1.0-XXP-LXXXBX/X	
x.xx ± 0.20		Draw:	Song	2025-07-09	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ± 0.10		Check:	Daniel	2025-07-09	

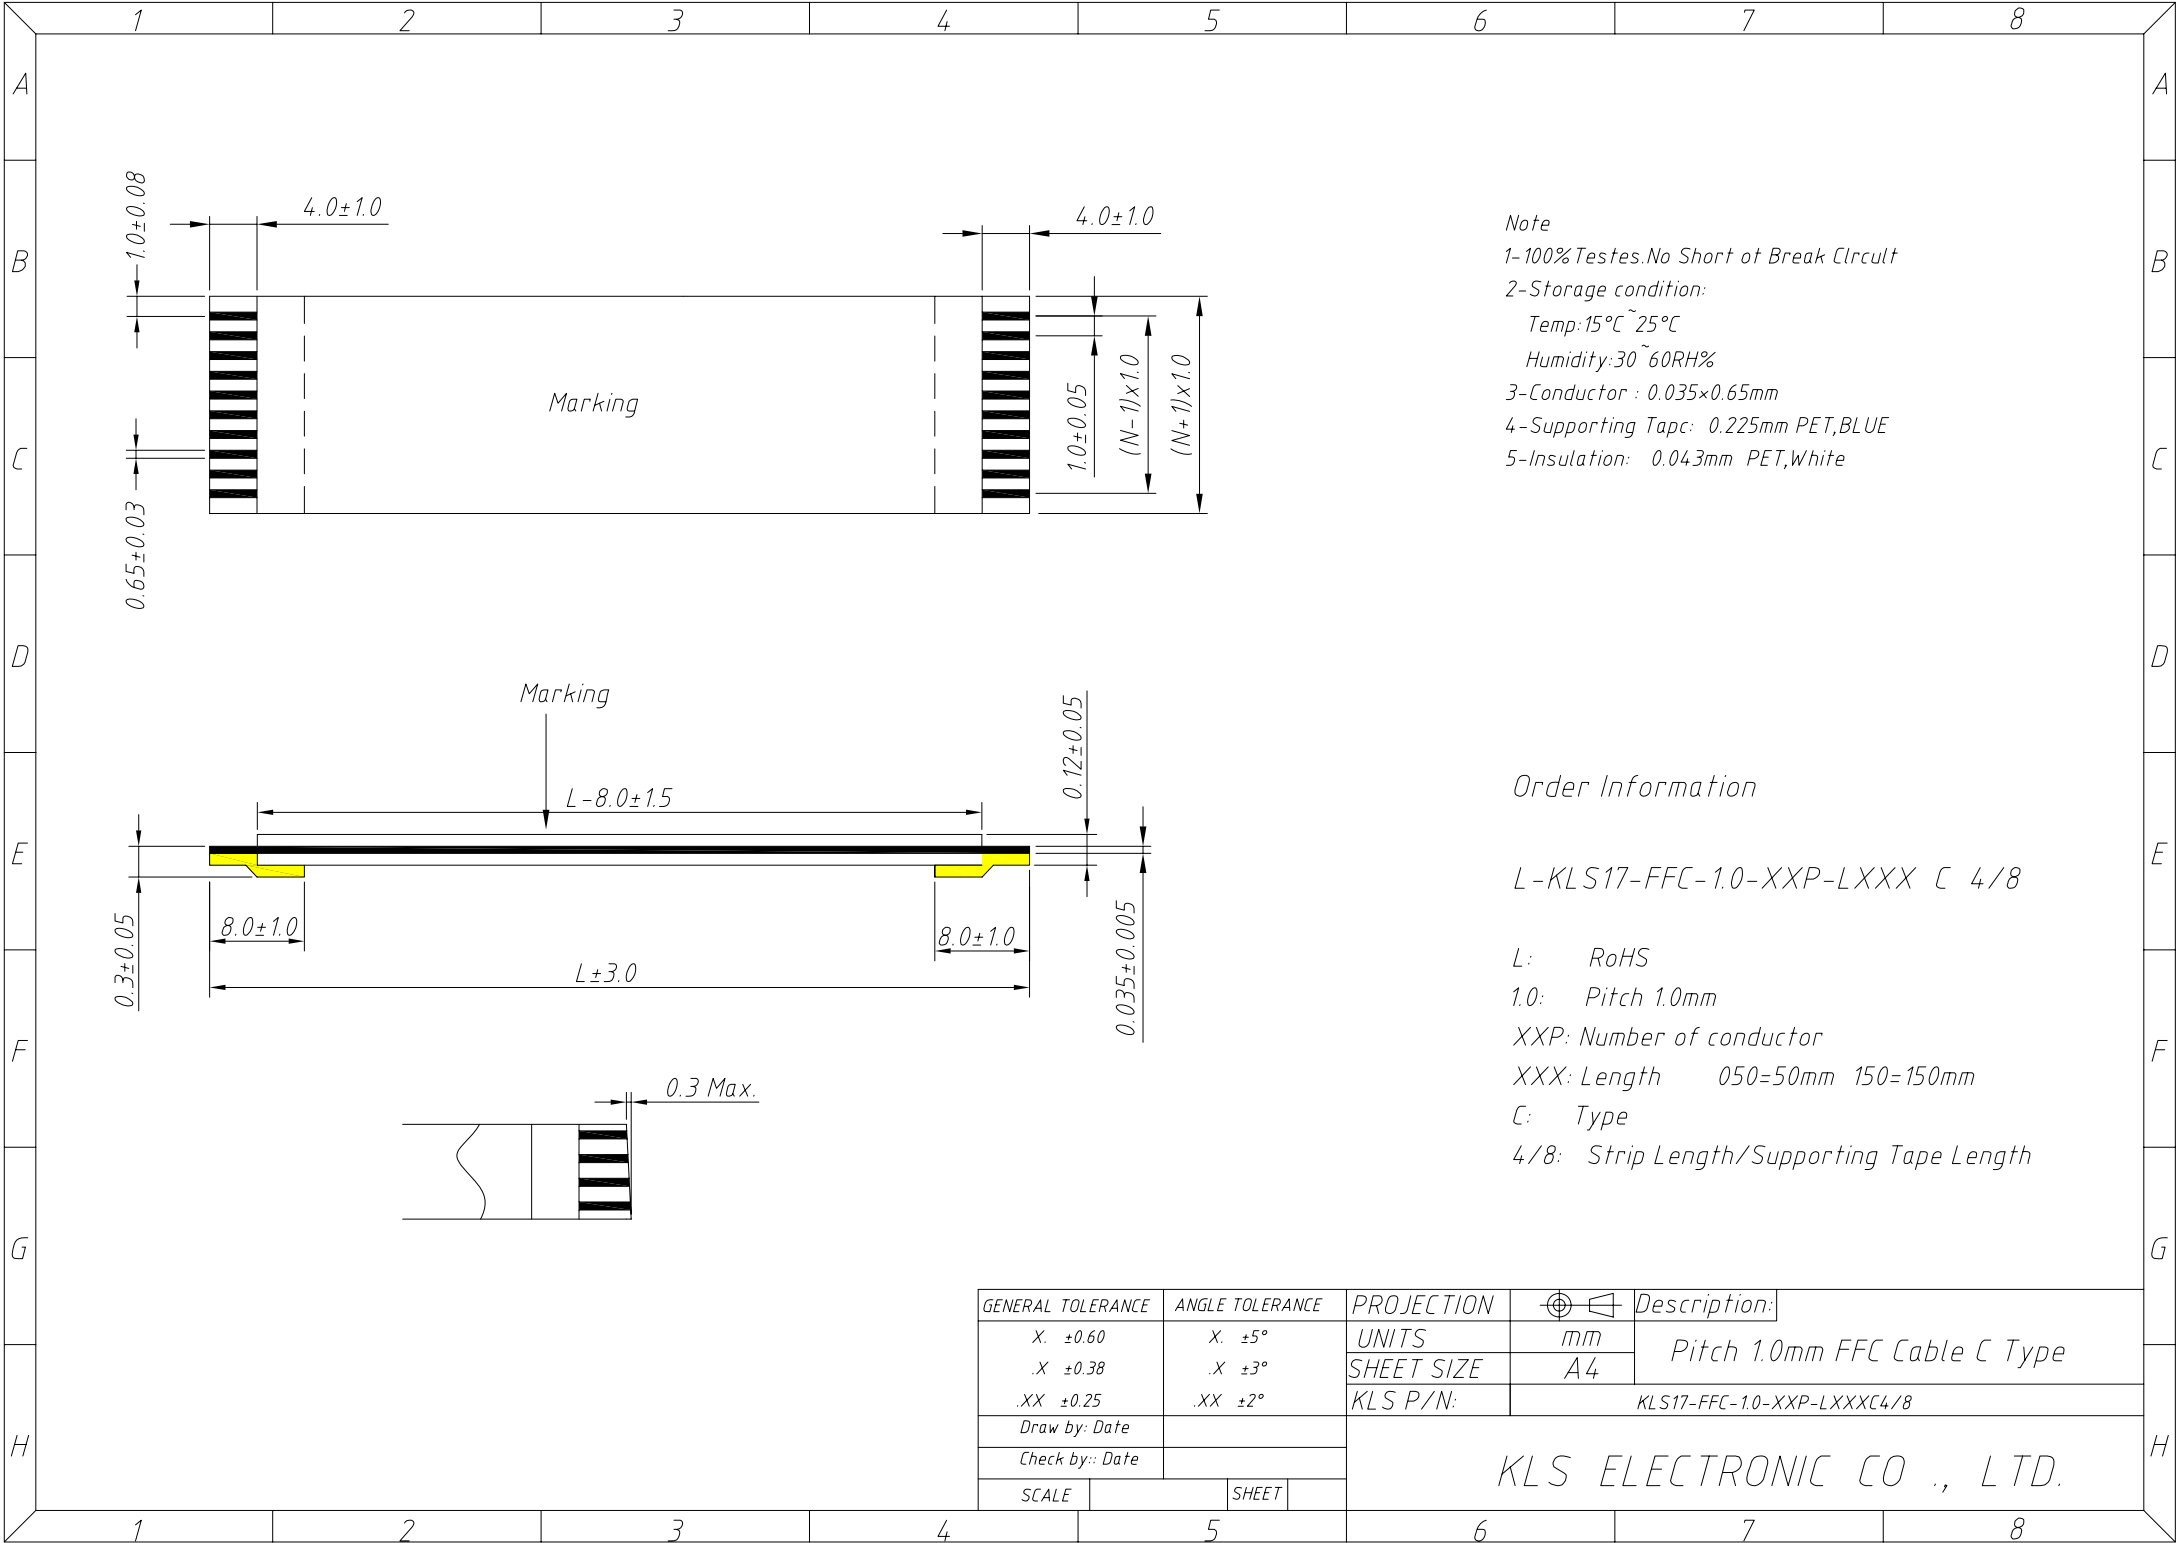


Note
1-100% Testes.No Short at Break Clrcult
2-Storage condition:
Temp:15℃~25℃
Humidity:30~60RH%
3-Conductor : 0.035×0.65mm
4-Supporting Tapc: 0.225mm PET,BLUE
5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-1.0-XXP-LXXX C 4/8

L: RoHS
1.0: Pitch 1.0mm
XXP: Number of conductor
XXX: Length 050=50mm 150=150mm
C: Type
4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
.X ±0.60		.X ±5°		UNITS	mm	Pitch 1.0mm FFC Cable C Type
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°		KLS P/N:	KLS17-FFC-1.0-XXP-LXXXC4/8	
Draw by: Date				KLS ELECTRONIC CO., LTD.		
Check by: Date						
SCALE			SHEET			

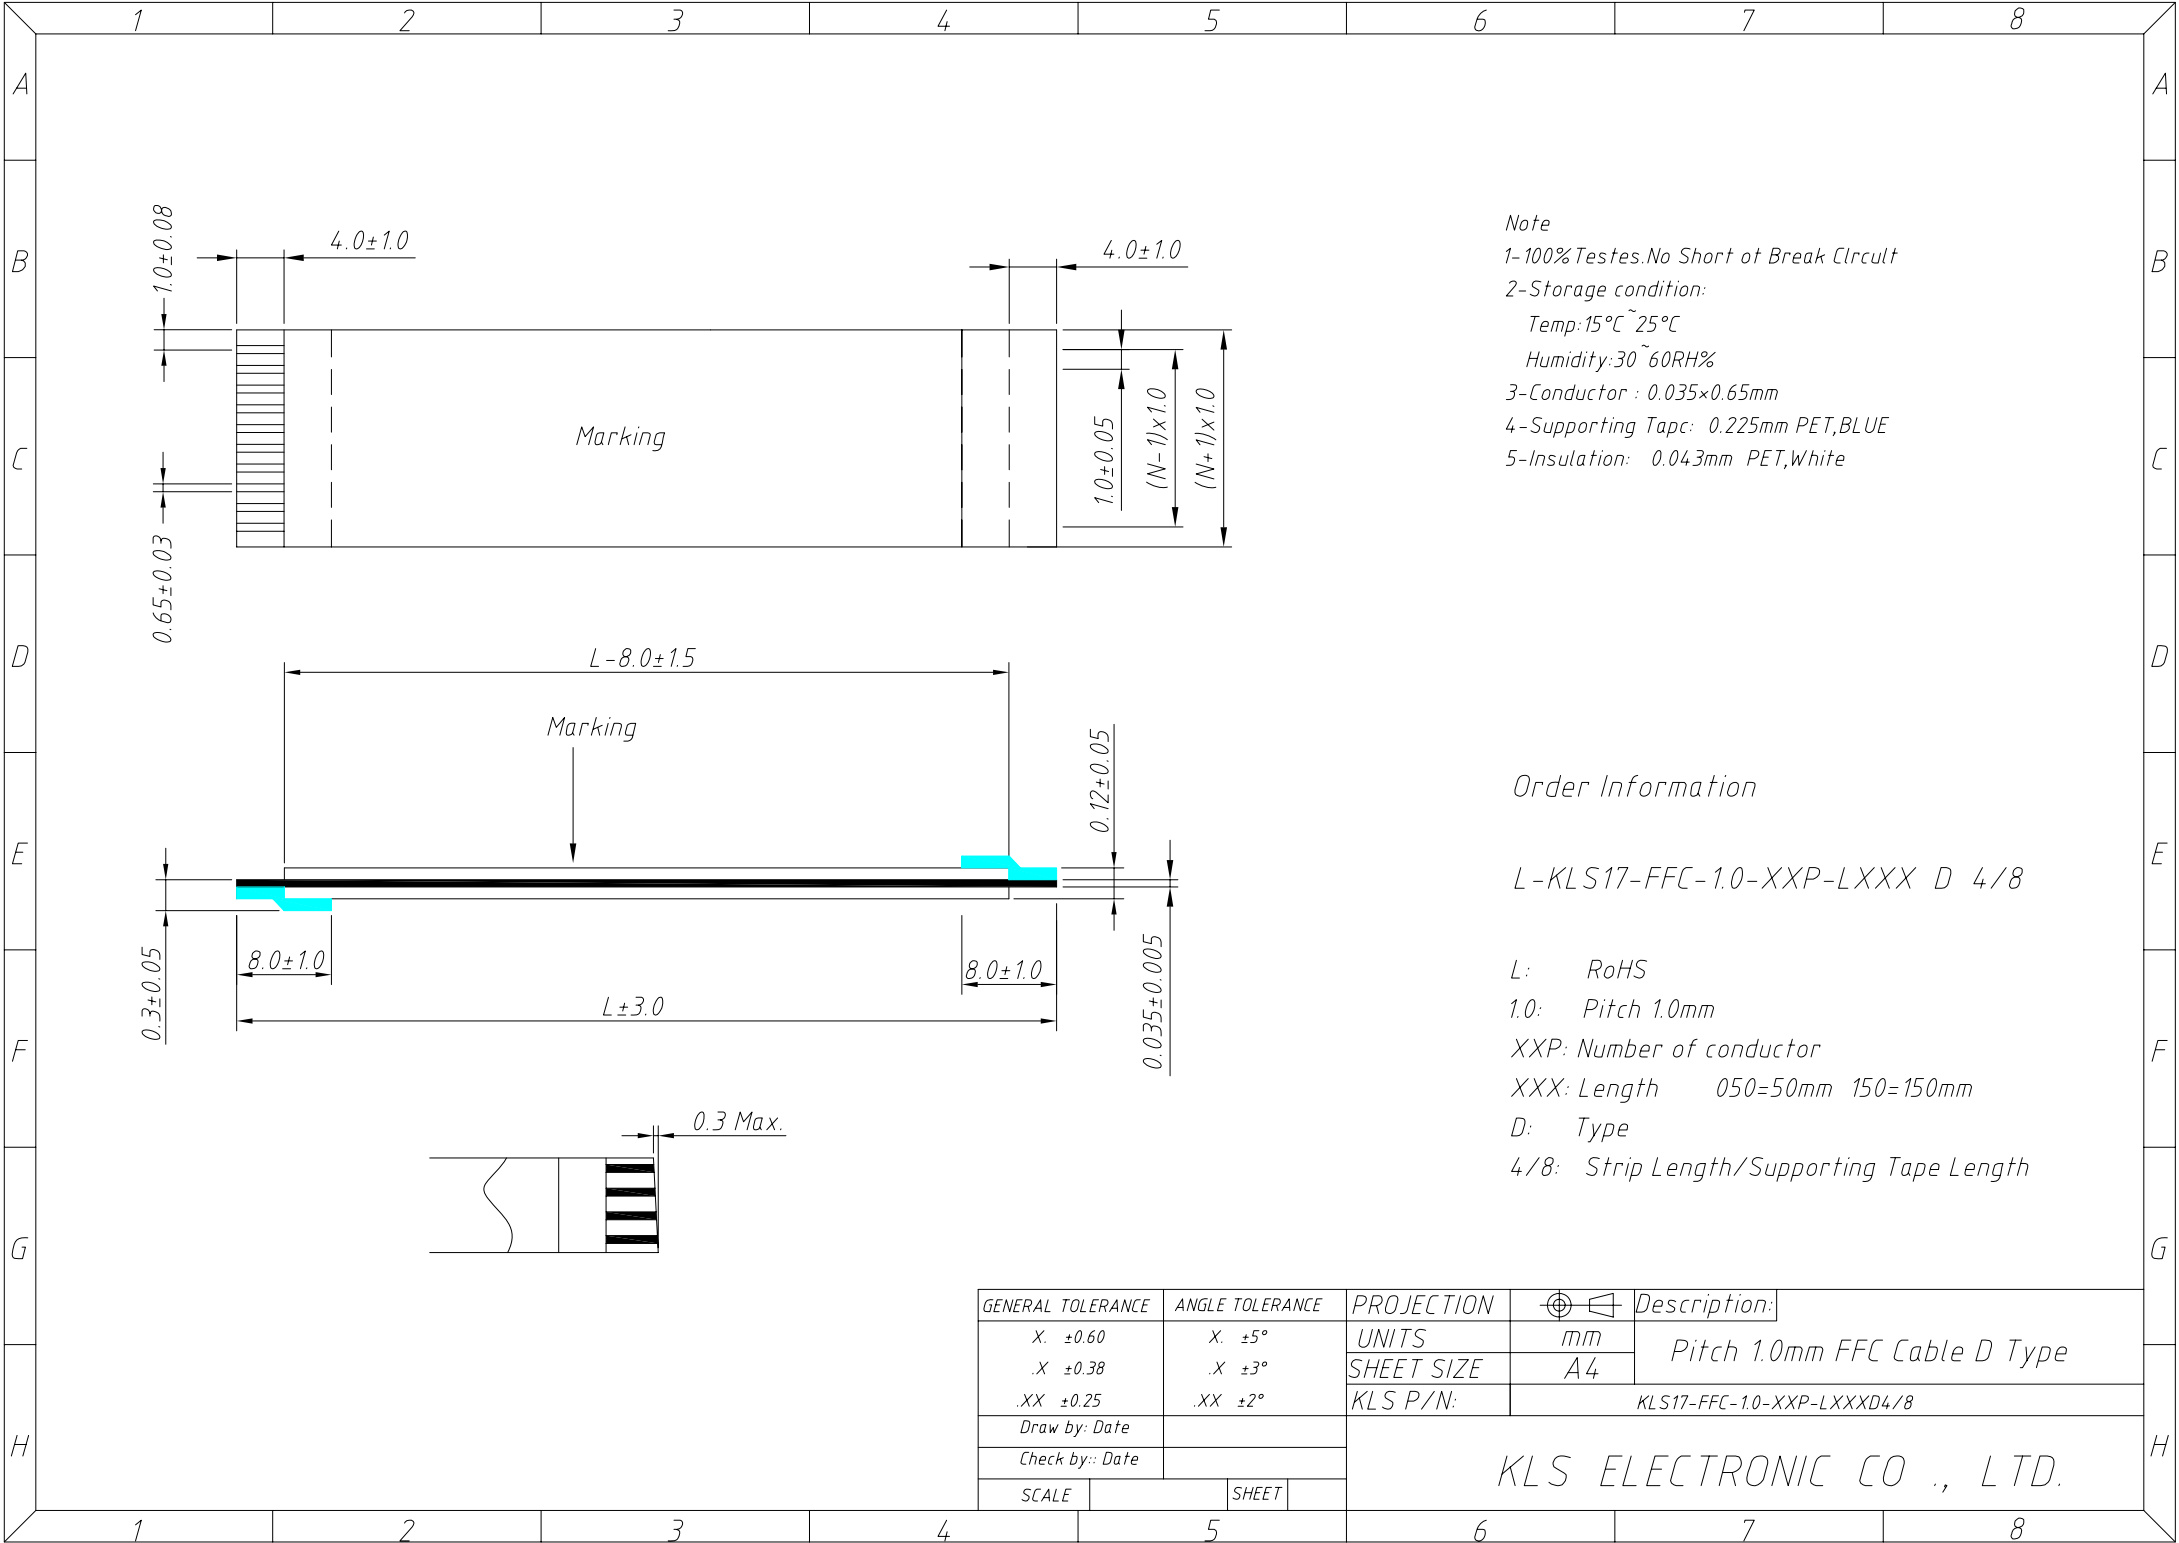

Note
1-100% Testes.No Short at Break Clrcult
2-Storage condition:
Temp:15℃~25℃
Humidity:30~60RH%
3-Conductor : 0.035×0.65mm
4-Supporting Tape: 0.225mm PET,BLUE
5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-1.0-XXP-LXXX D 4/8

L: RoHS
1.0: Pitch 1.0mm
XXP: Number of conductor
XXX: Length 050=50mm 150=150mm
D: Type
4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
.X. ±0.60		.X. ±5°		UNITS	mm	Pitch 1.0mm FFC Cable D Type
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°		KLS P/N:	KLS17-FFC-1.0-XXP-LXXXD4/8	
Draw by: Date				KLS ELECTRONIC CO., LTD.		
Check by: Date						
SCALE			SHEET			