

1
RoHS Compliance

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

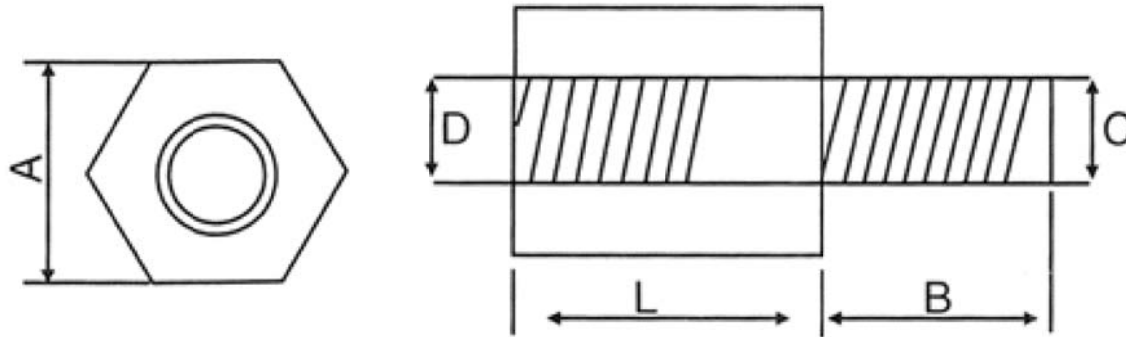

Material: PA66, (UL 94 V-2), Natural

Working temperature: 0°C ~ 80°C

Dipping Bibulous: 2.5% at 20°C 24H 50% Humidity

Withstand Voltage: 2500V/0.5mA/1m

Heat Resistance: B-130°C (30m without melting at 200 °C)

Application: the fixed PC board on the boards, free tools,

Item No.	A	B	C/D	L	Packing
L-KLS8-0214-M2-10	4	5.0	M2	10	1000PCS

ANGLE TOLERANCE	PROJECTION	Description:
±3°		M2 Hexagonal Spacer
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Daniel
x.xxx ±0.10	Check:	Daniel
		KLS P/N: L-KLS8-0214-M2-10
		NingBo KLS ELECTRONIC CO.,L TD.

1

2

3

4

5

6

7

8