


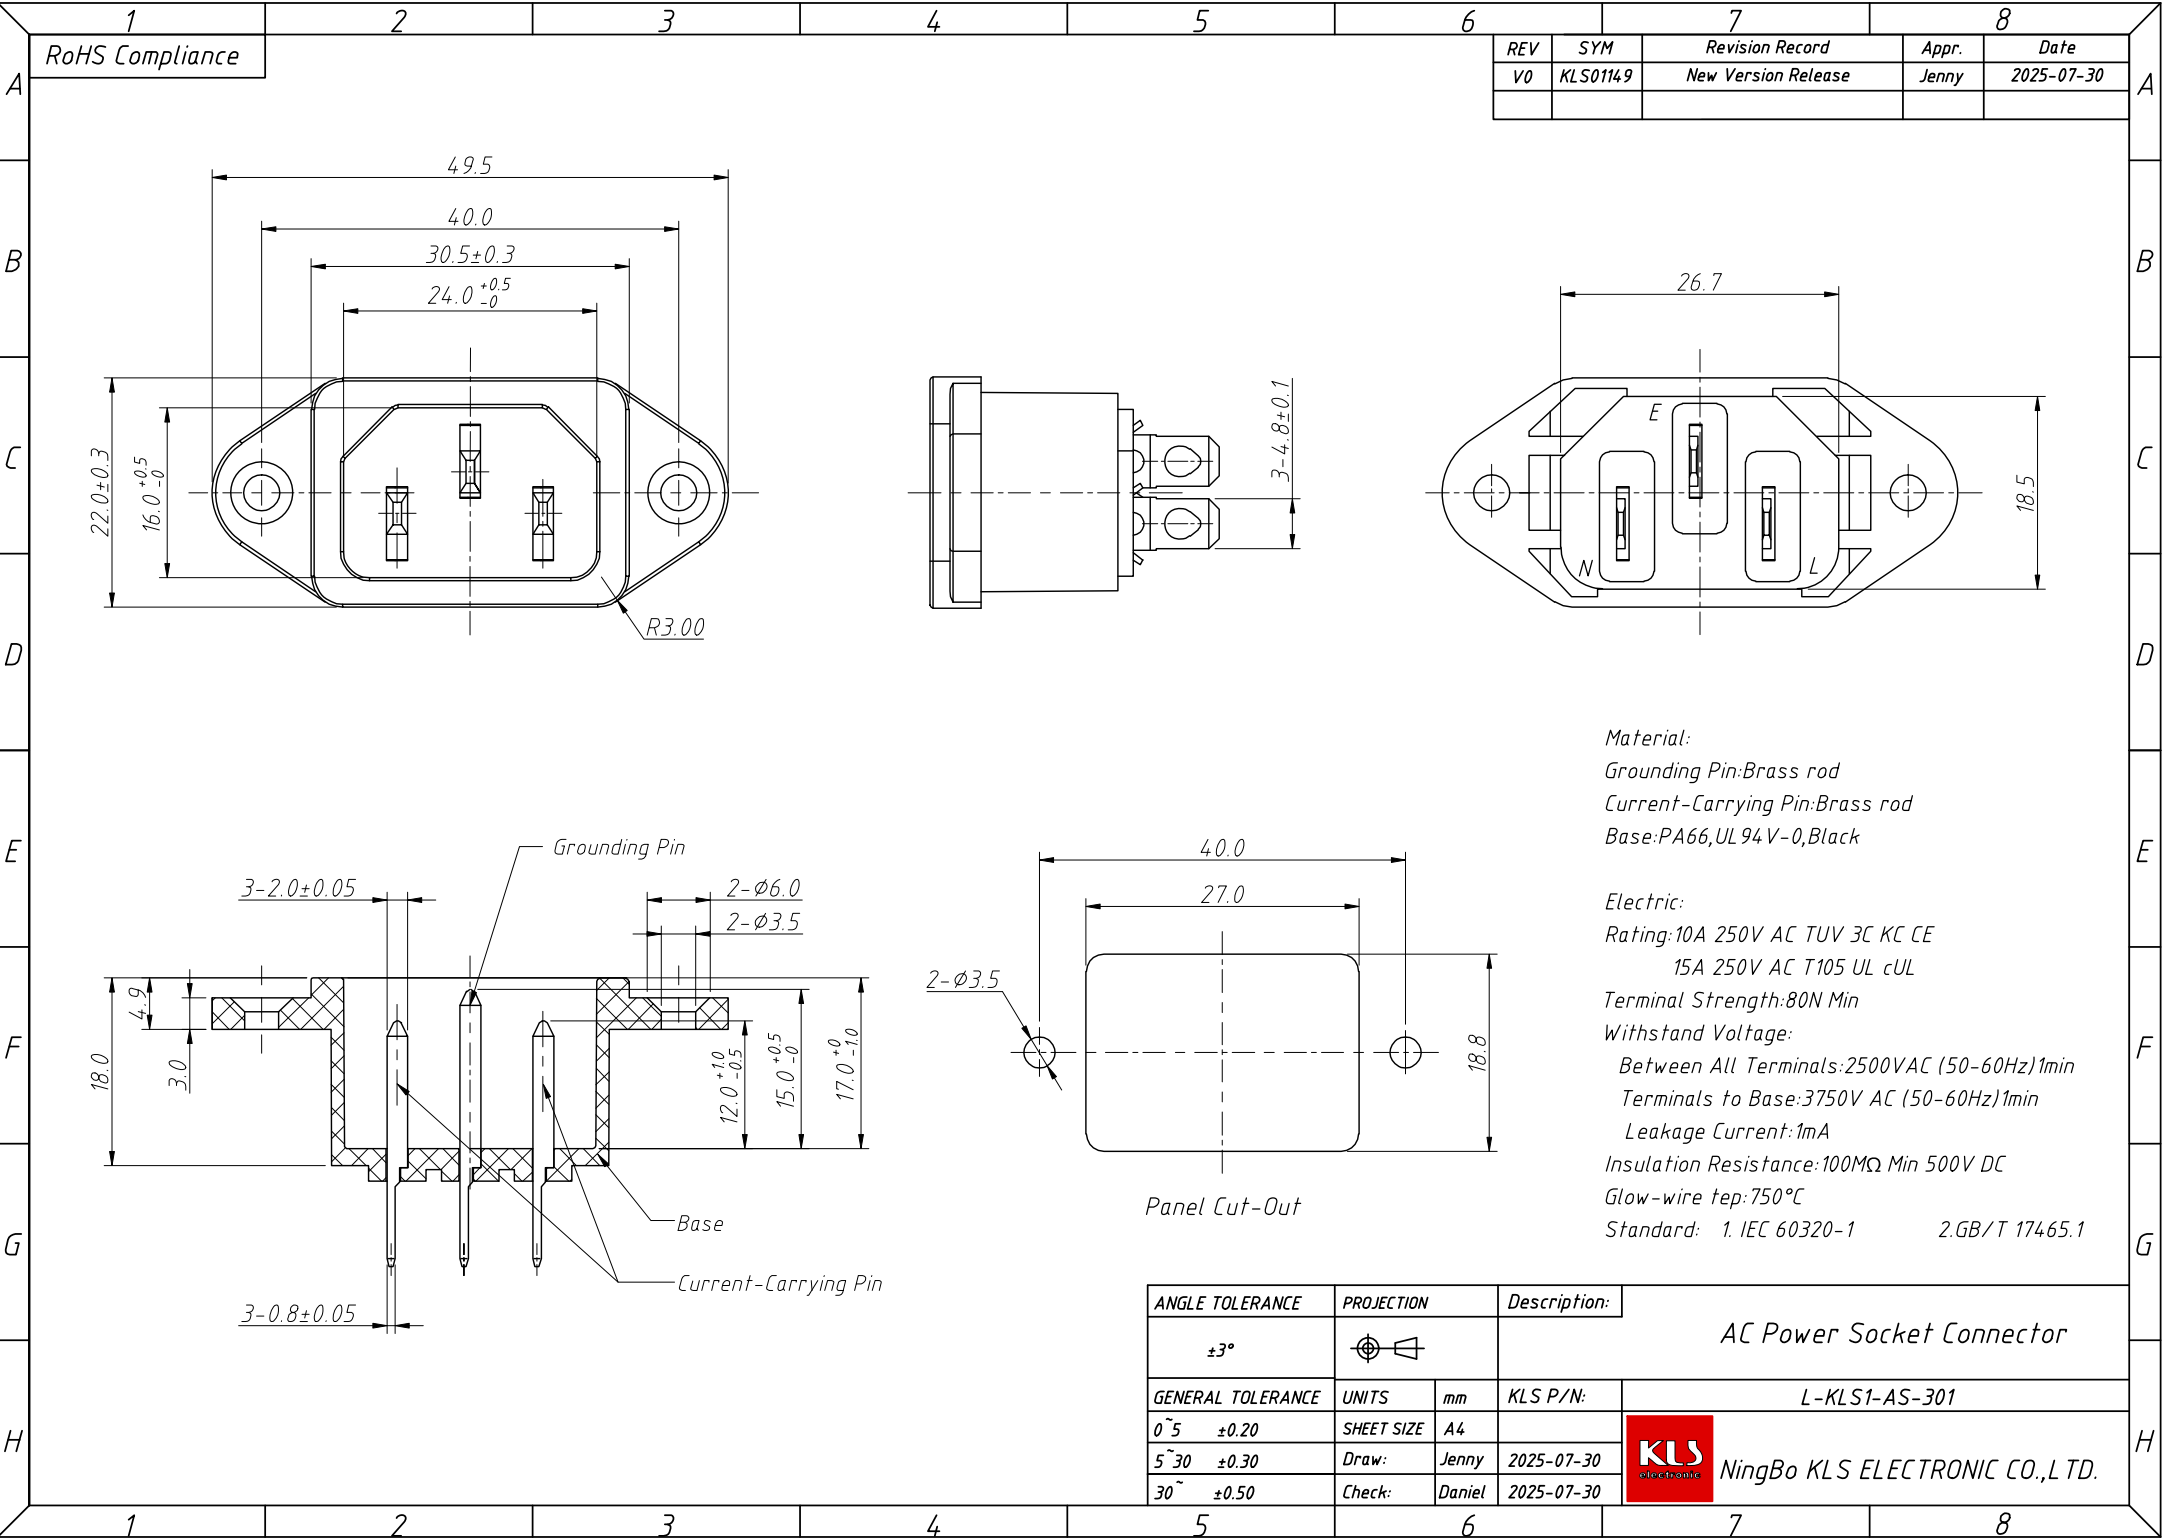

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS01149	New Version Release		Jenny	2025-07-30

Material:
Grounding Pin:Brass rod
Current-Carrying Pin:Brass rod
Base:PA66,UL 94V-0,Black

Electric:
Rating:10A 250V AC TUV 3C KC CE
15A 250V AC T105 UL cUL
Terminal Strength:80N Min
Withstand Voltage:
Between All Terminals:2500VAC (50-60Hz)1min
Terminals to Base:3750V AC (50-60Hz)1min
Leakage Current:1mA
Insulation Resistance:100MΩ Min 500V DC
Glow-wire tep:750°C
Standard: 1. IEC 60320-1 2.GB/T 17465.1

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				AC Power Socket Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-AS-301
0~5	±0.20	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.
5~30	±0.30	Draw:	Jenny	2025-07-30	
30~	±0.50	Check:	Daniel	2025-07-30	