



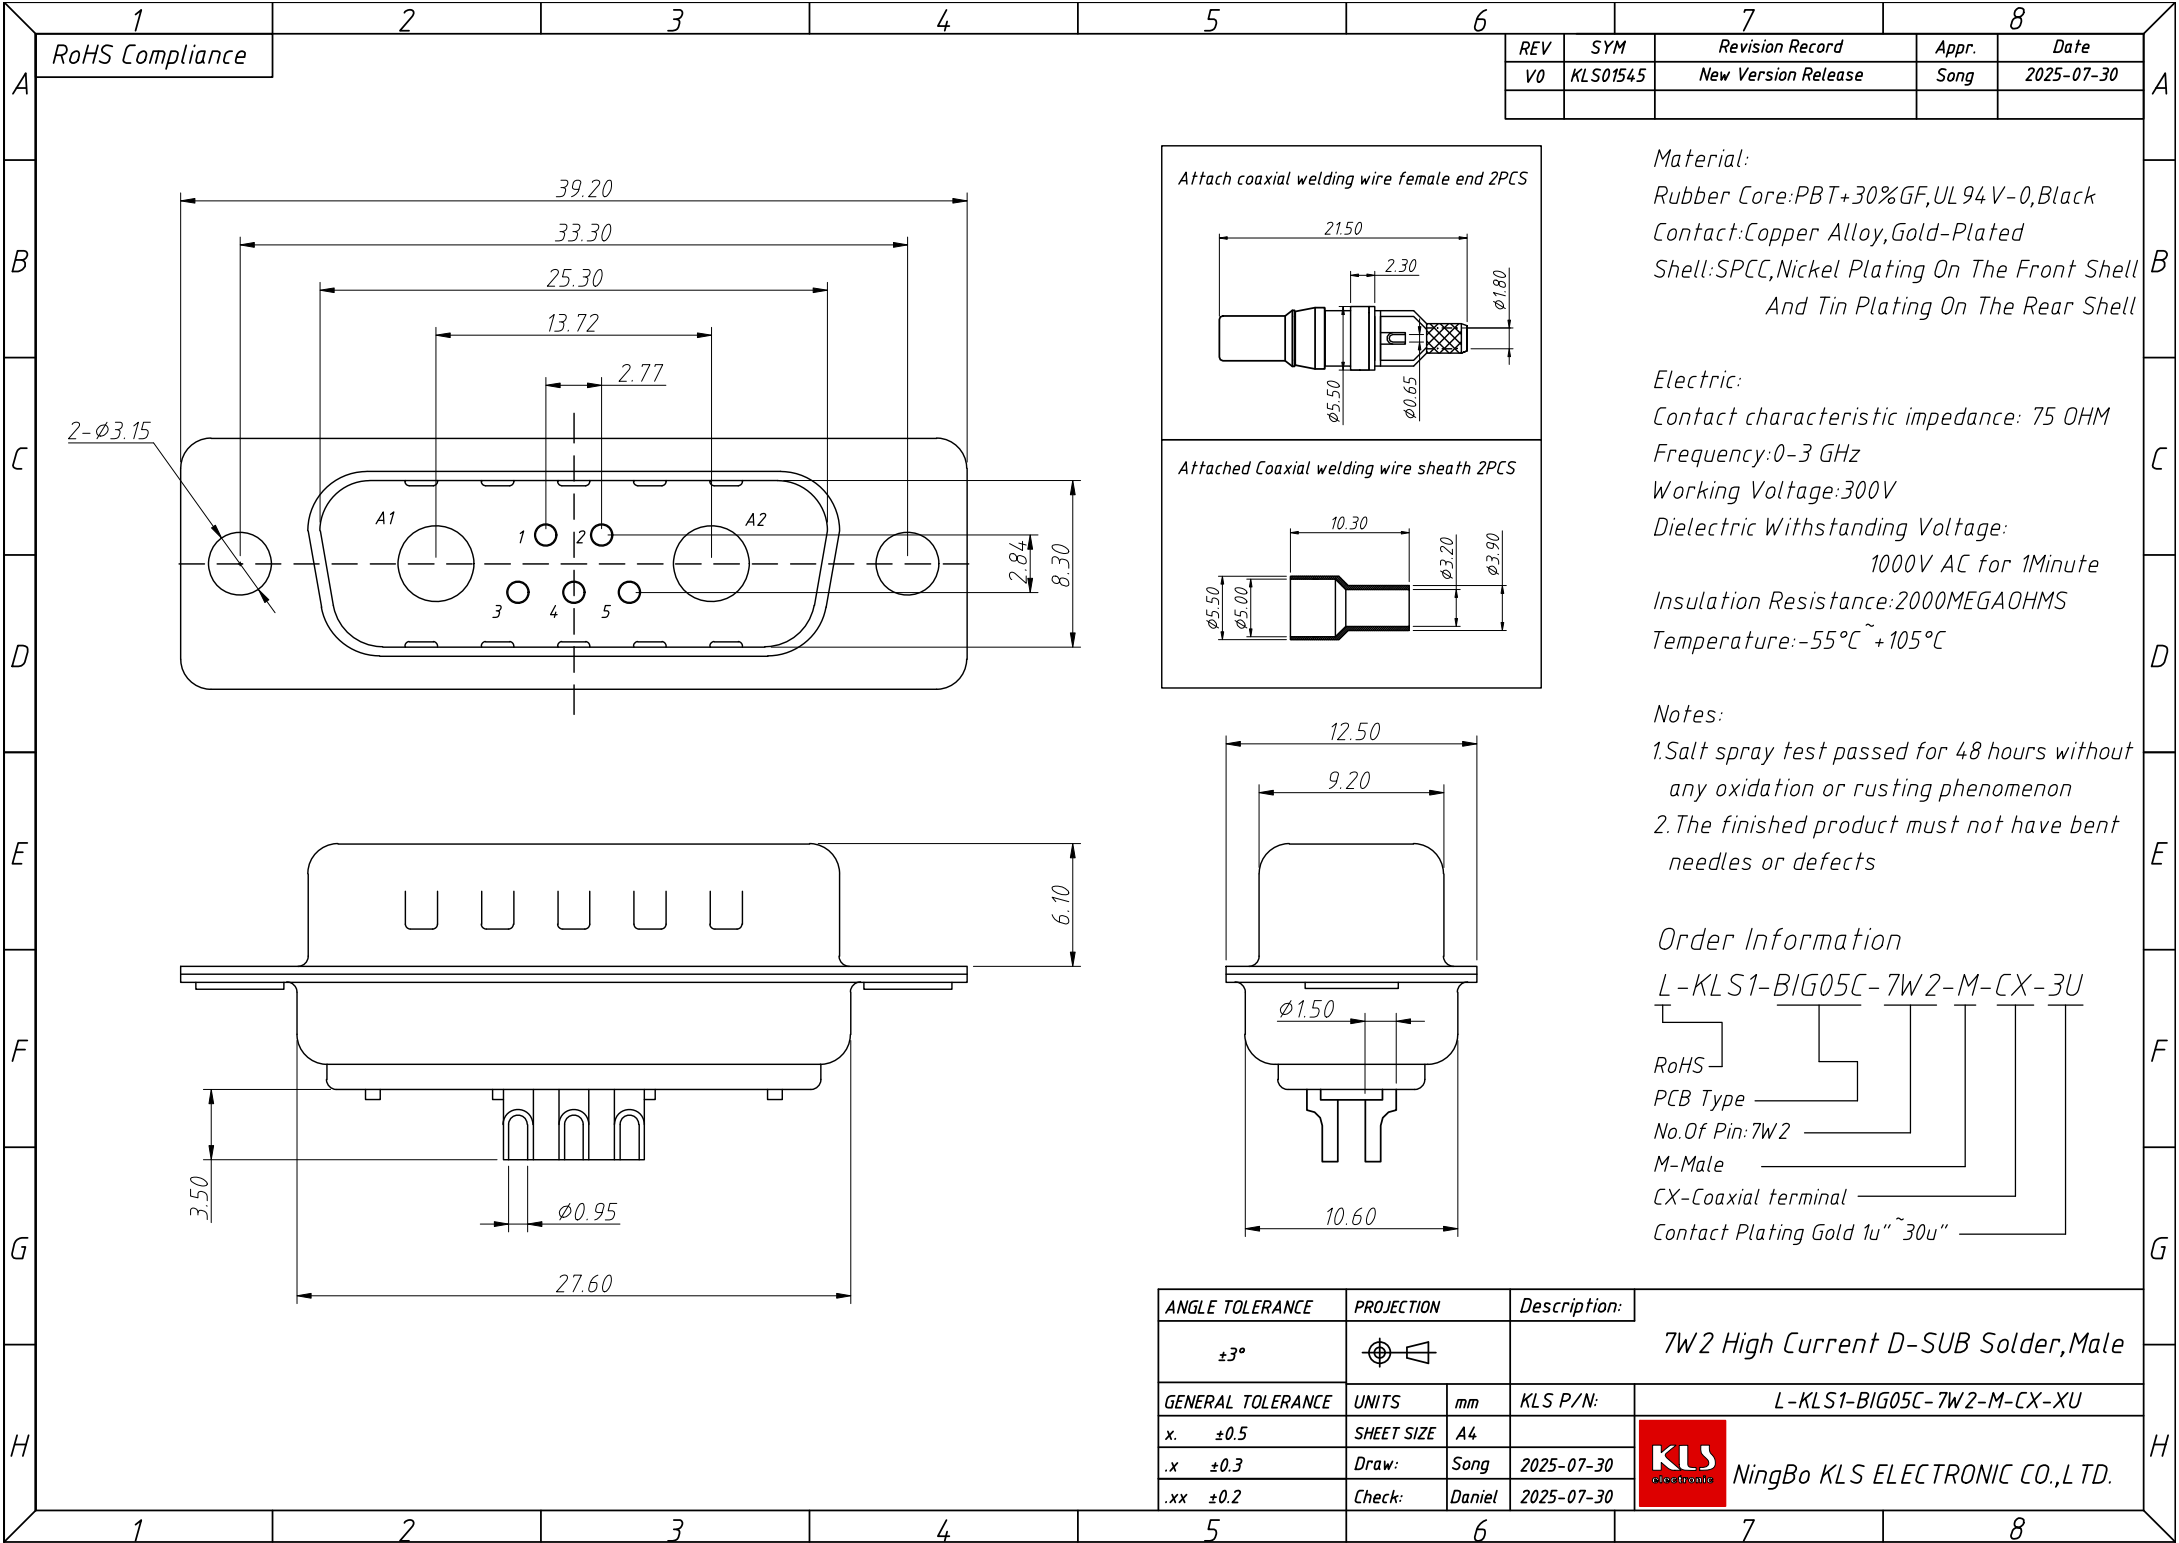

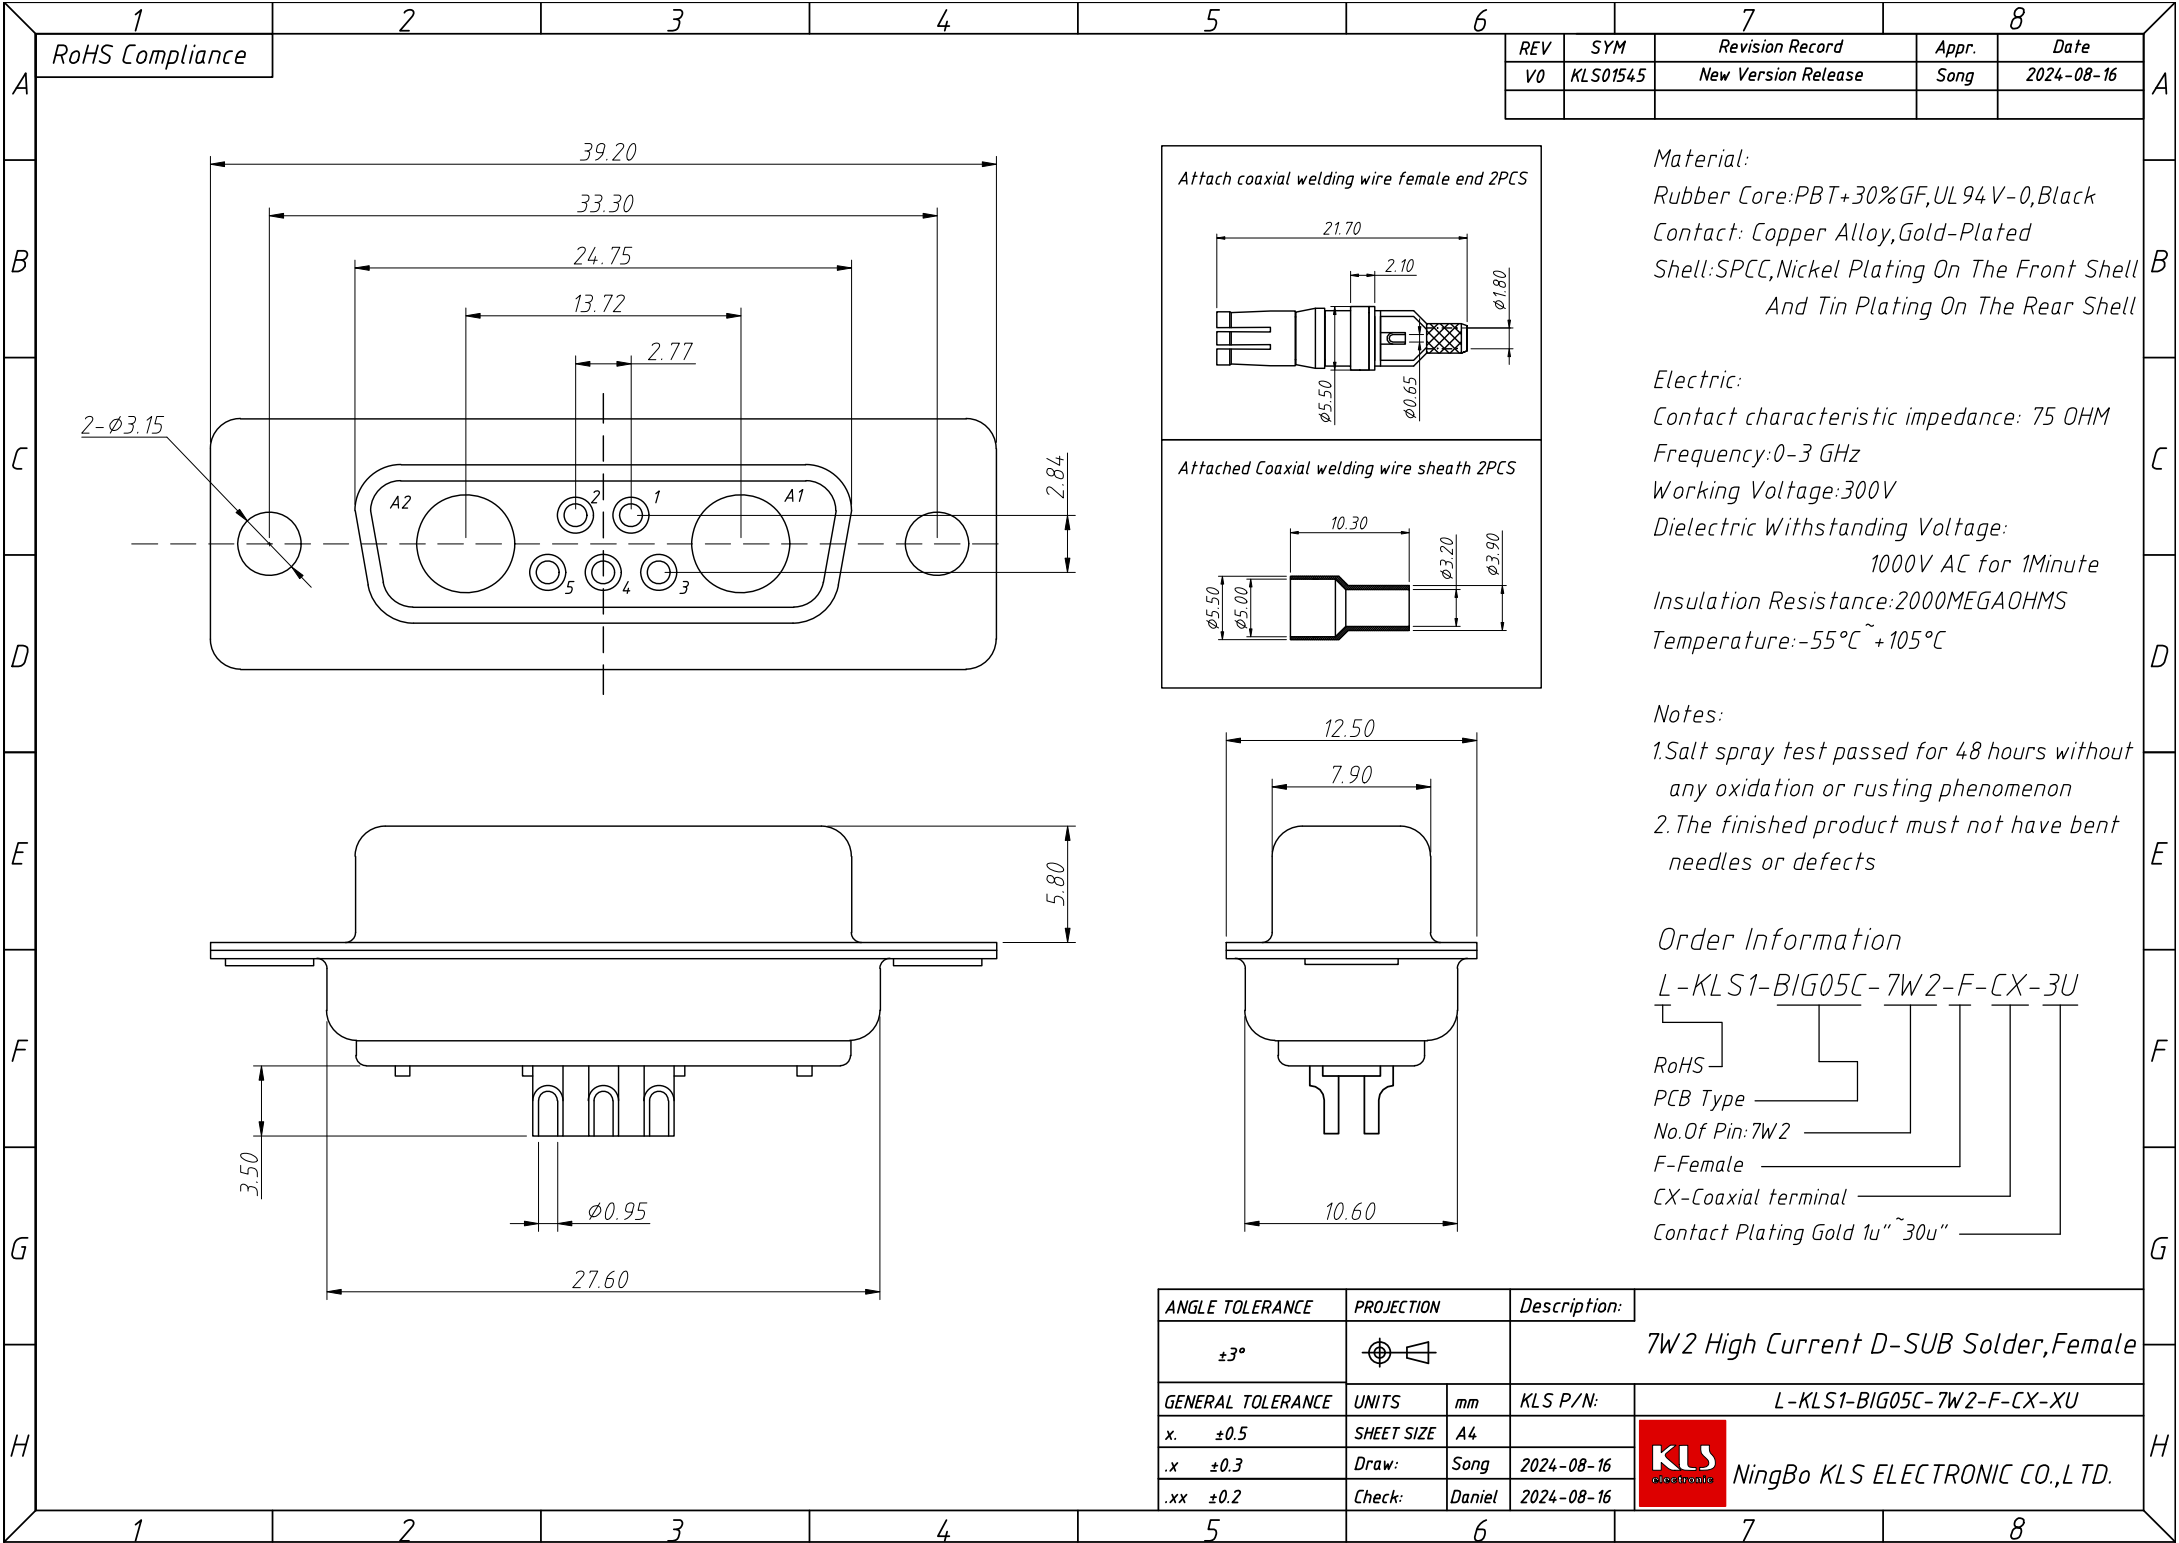

Material:
Rubber Core:PBT+30%GF,UL 94 V-0,Black
Contact: Copper Alloy,Gold-Plated
Shell:SPCC,Nickel Plating On The Front Shell
And Tin Plating On The Rear Shell

Electric:
Contact characteristic impedance: 75 OHM
Frequency:0-3 GHz
Working Voltage:300V
Dielectric Withstanding Voltage:
1000V AC for 1Minute
Insulation Resistance:2000MEGAOHMS
Temperature:-55℃~+105℃

Notes:
1.Salt spray test passed for 48 hours without
any oxidation or rusting phenomenon
2.The finished product must not have bent
needles or defects

Order Information
L-KLS1-BIG05C-7W2-F-CX-3U
RoHS
PCB Type
No.Of Pin:7W2
F-Female
CX-Coaxial terminal
Contact Plating Gold 1u"~30u"

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				7W2 High Current D-SUB Solder,Female	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.	±0.5	SHEET SIZE	A4	L-KLS1-BIG05C-7W2-F-CX-XU	
.x	±0.3	Draw:	Song	2024-08-16	NingBo KLS ELECTRONIC CO.,L TD.
.xx	±0.2	Check:	Daniel	2024-08-16	