


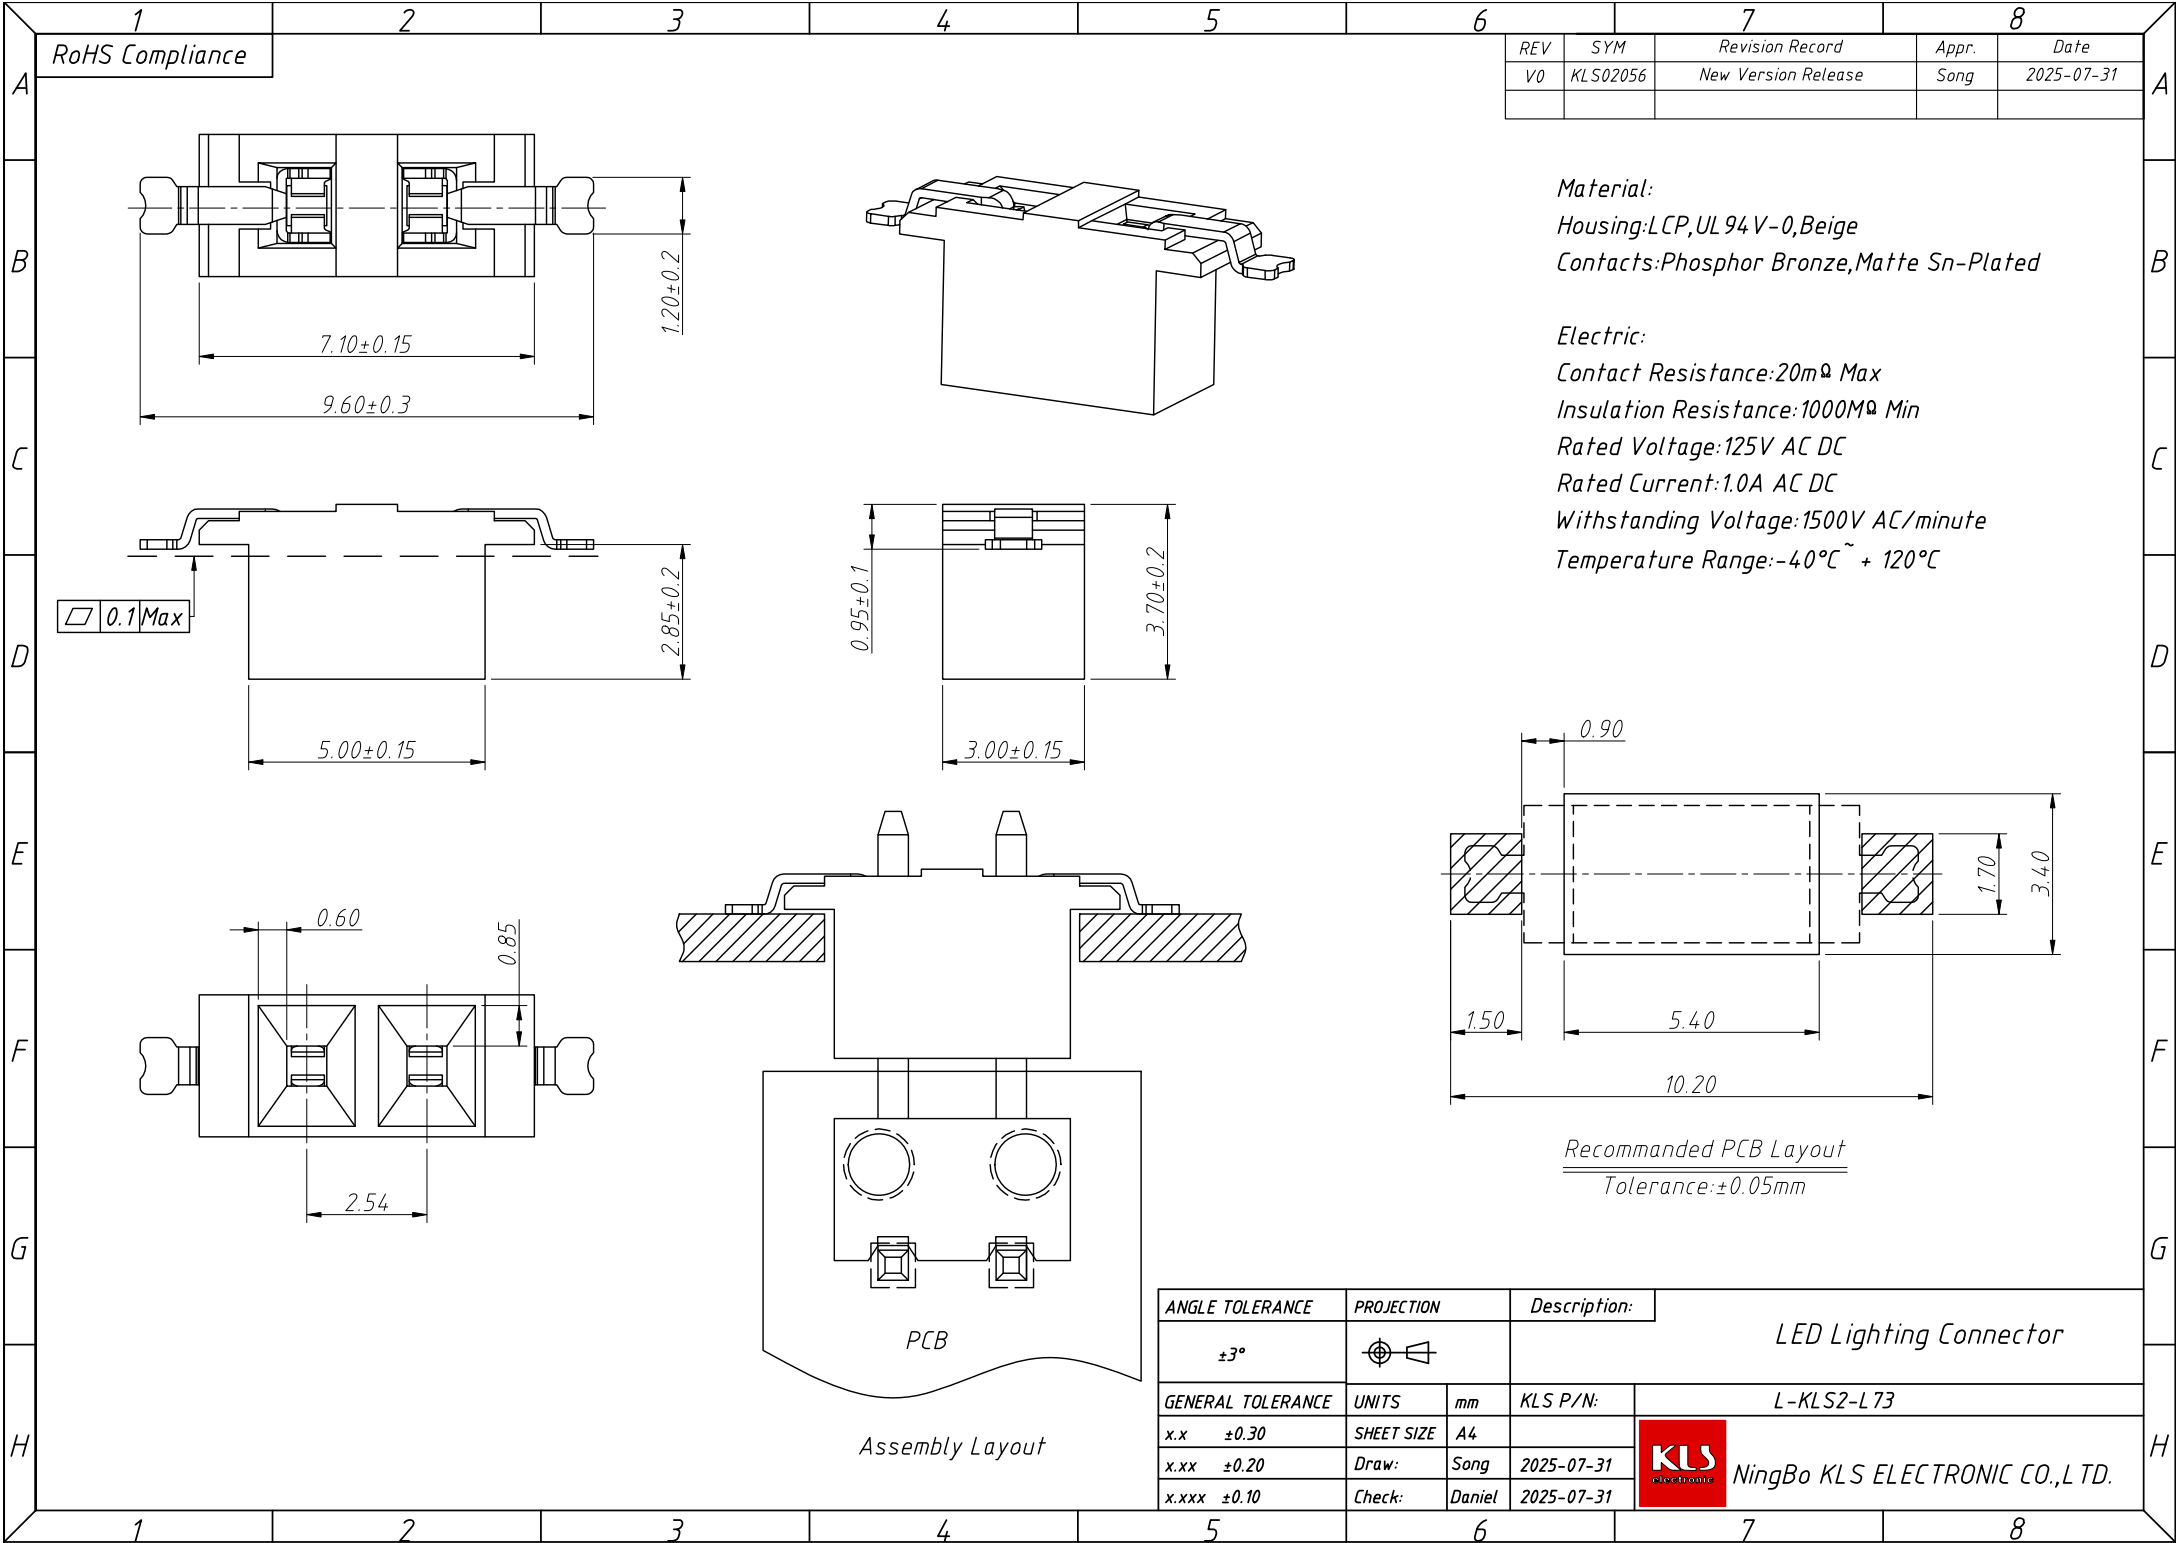

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS02056	New Version Release		Song	2025-07-31

Material:
Housing:LCP,UL 94V-0,Beige
Contacts:Phosphor Bronze,Matte Sn-Plated

Electric:
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Rated Voltage:125V AC DC
Rated Current:1.0A AC DC
Withstanding Voltage:1500V AC/minute
Temperature Range:-40℃ ~ + 120℃

Recommended PCB Layout
Tolerance:±0.05mm

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				LED Lighting Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x ±0.30		SHEET SIZE	A4	L-KLS2-L73	
x.xx ±0.20		Draw:	Song	2025-07-31	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10		Check:	Daniel	2025-07-31	