


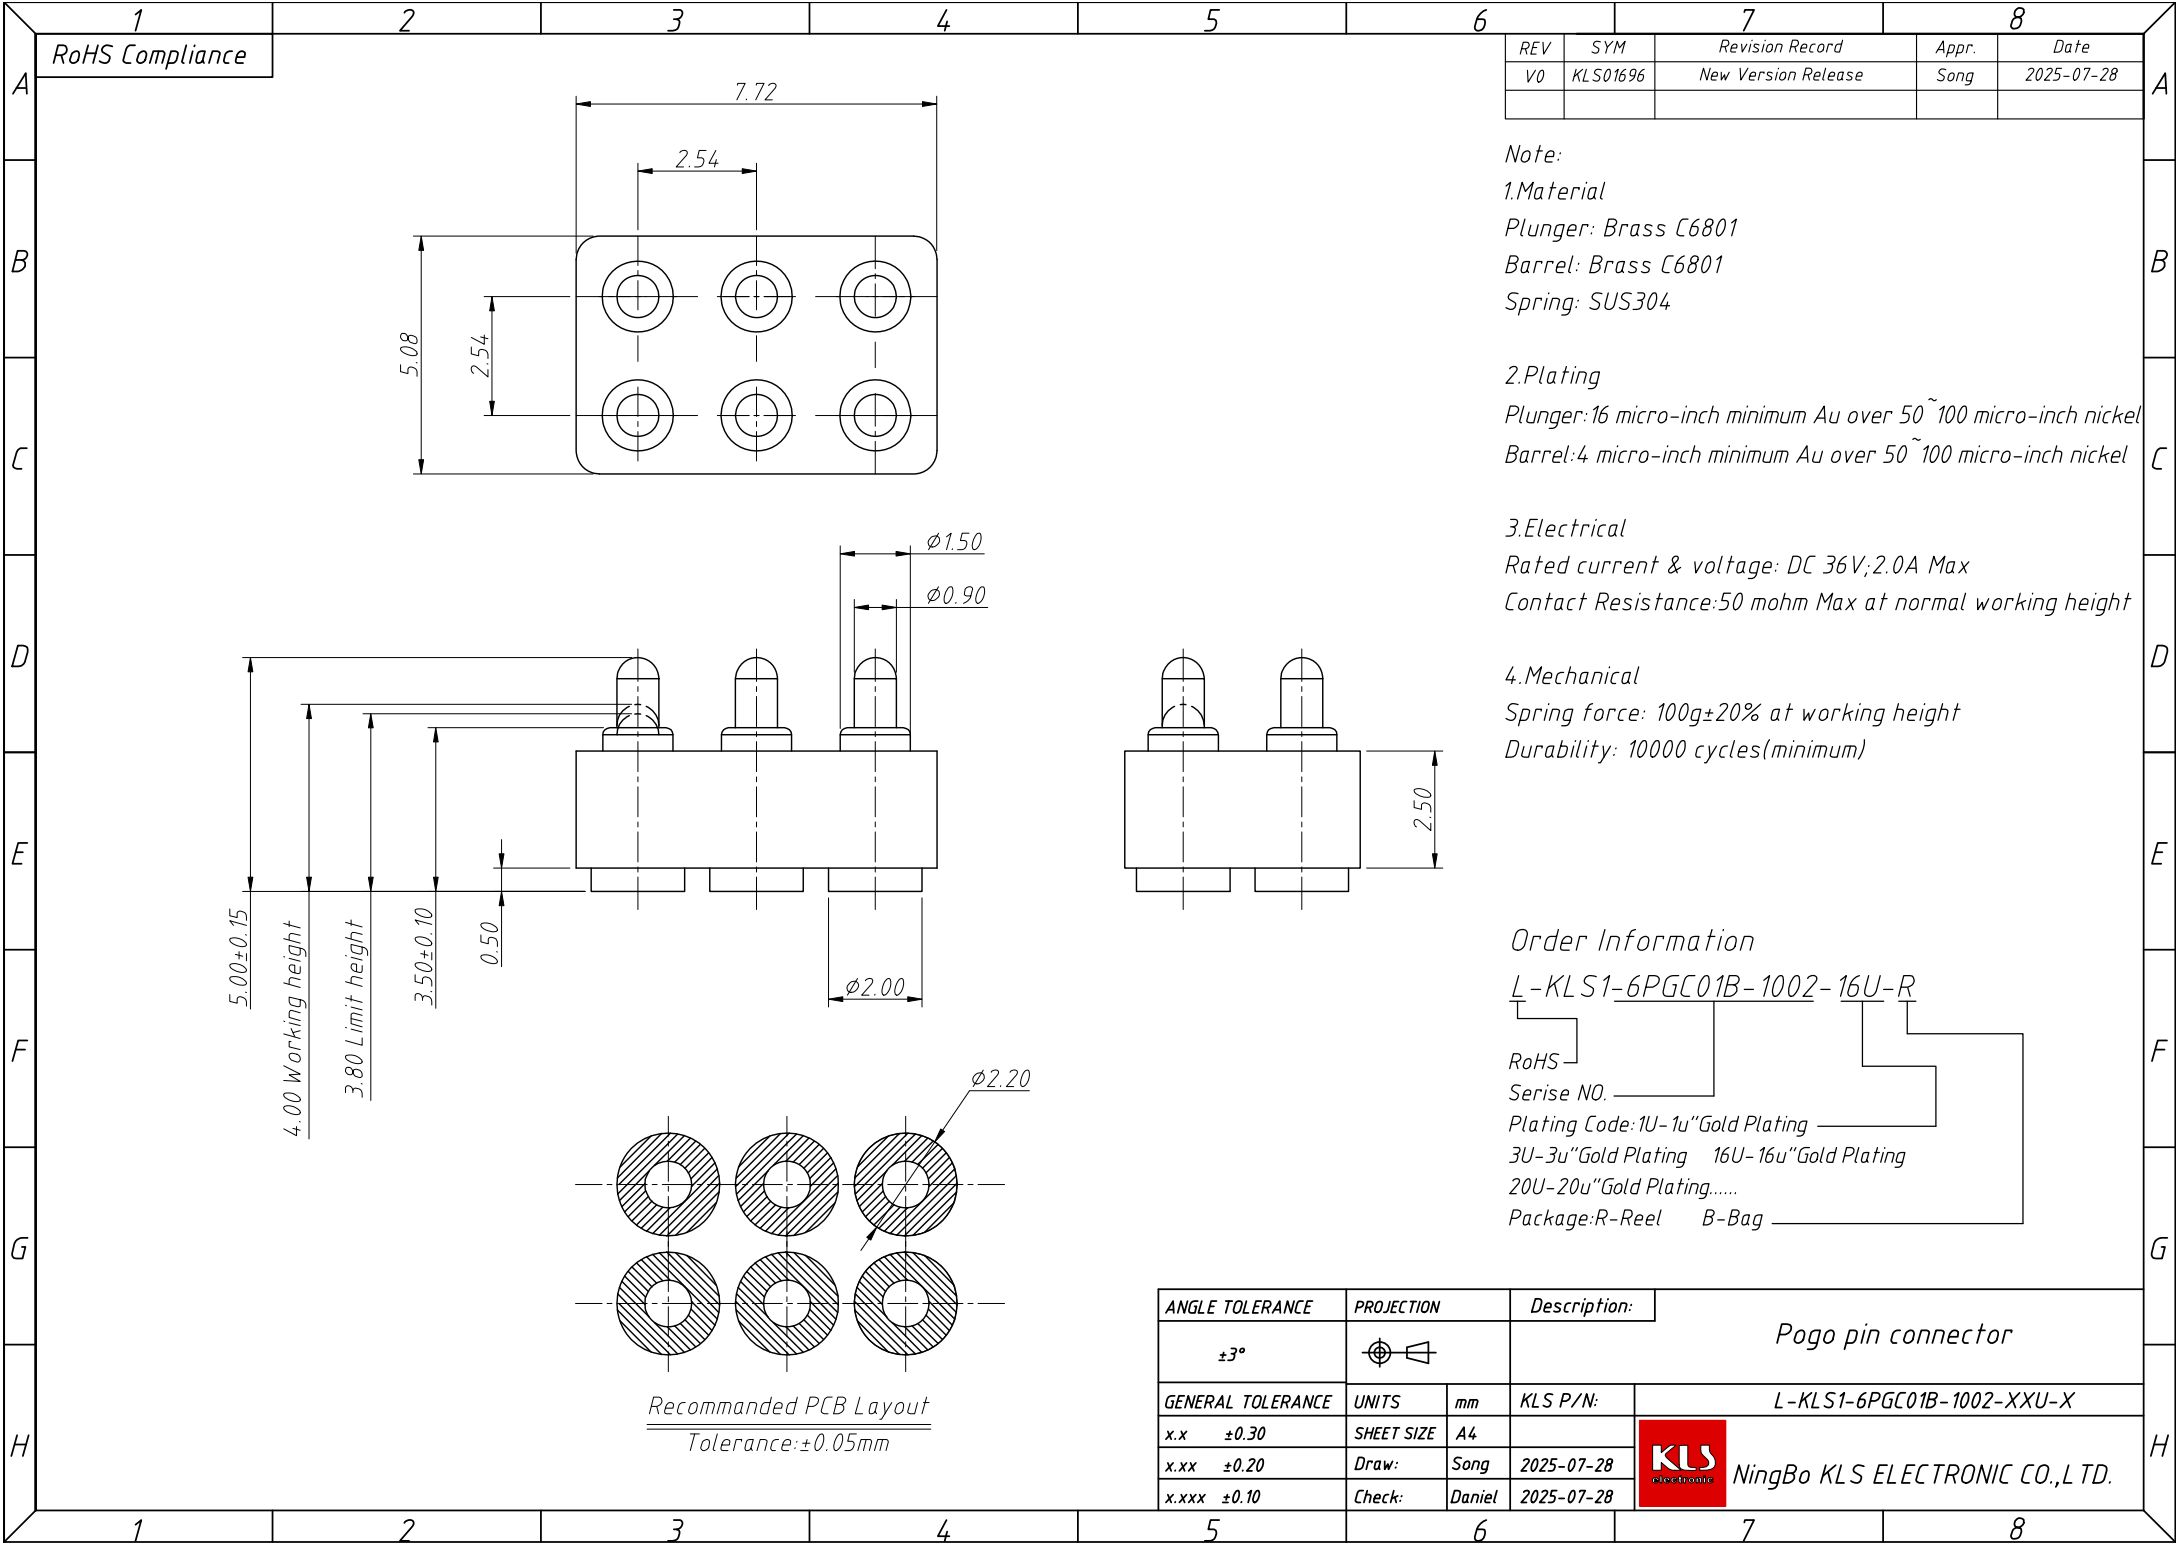

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS01696	New Version Release		Song	2025-07-28

Note:

1.Material
Plunger: Brass C6801
Barrel: Brass C6801
Spring: SUS304

2.Plating
Plunger:16 micro-inch minimum Au over 50~100 micro-inch nickel
Barrel:4 micro-inch minimum Au over 50~100 micro-inch nickel

3.Electrical
Rated current & voltage: DC 36V;2.0A Max
Contact Resistance:50 mohm Max at normal working height

4.Mechanical
Spring force: 100g±20% at working height
Durability: 10000 cycles(minimum)

Order Information

L-KLS1-6PGC01B-1002-16U-R

RoHS

Seirse NO.

Plating Code:1U-1u"Gold Plating
3U-3u"Gold Plating 16U-16u"Gold Plating
20U-20u"Gold Plating.....

Package:R-Reel B-Bag

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				Pogo pin connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x ±0.30		SHEET SIZE		A4	
x.xx ±0.20		Draw:		Song	
x.xxx ±0.10		Check:		Daniel	
				L-KLS1-6PGC01B-1002-XXU-X	
				NingBo KLS ELECTRONIC CO.,LTD.	