
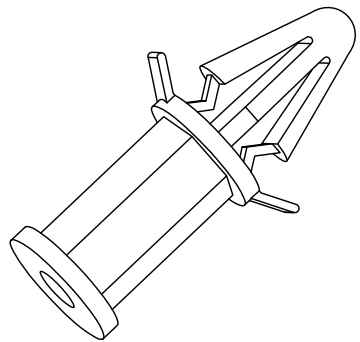
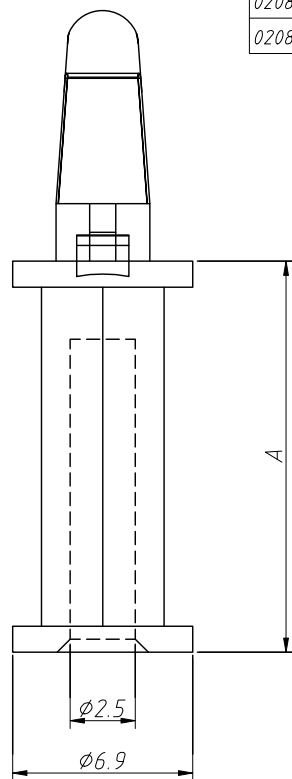
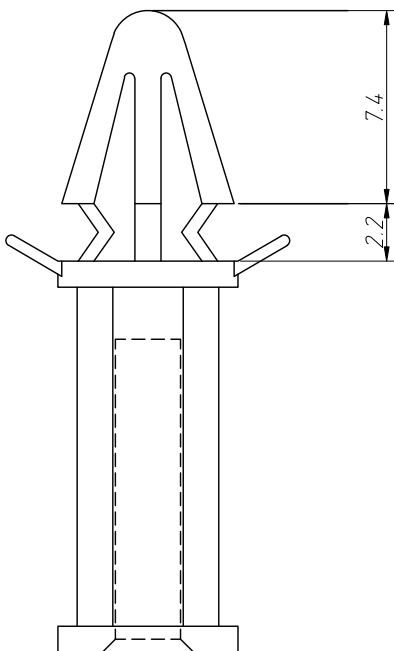


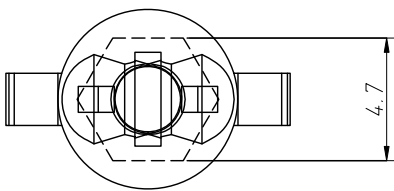

ITEM NO:	A	PCB Hole	PCB Thickness
0208A-CS-05	5.0	ø4.0	1.2~1.7
0208A-CS-06	6.0		
0208A-CS-07	7.0		
0208A-CS-10	10.0		
0208A-CS-12.5	12.5		
0208A-CS-15	15.0		
0208A-CS-16	16.0		
0208A-CS-20	20.0		
0208A-CS-25	25.0		
0208A-CS-26	26.0		
0208A-CS-30	30.0		
0208A-CS-35	35.0		

Notes:

Material: PA66,UL 94 V-2,Natural

Operating Temperature:0℃~+80℃

Withstanding Voltage:2500V /0.5mA/1Sec

Temperature Resistance: Class B 130° (Requires 200° Baking For 30 Minutes Without Melting)

The Appearance Shall Be Free Of Defects Such As Burrs, Burrs, Shrinkage, Etc

This Product Does Not Contain Lead (Pb), Mercury (Hg), Pot (Cd), Hexavalent Inscription (Cr VI)

The Material Used In This Product Has A Water Absorption Of 2.5% After 24 Hours Immersion At A Temperature Of 23 °C And A Relative Humidity Of 50%

Boil water at 100℃~110℃ for 10 minutes

Usage: The substrate is fixed with iron plate self tapping screws, and the other end is directly pressed into the PC board

ANGLE TOLERANCE	PROJECTION	Description:	PCB spacer column		
±3°					
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS8-0208A-CS-XX	
x.x ±0.30	SHEET SIZE	A4			
x.xx ±0.20	Draw:	Song	2025-08-28		NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2025-08-28		