
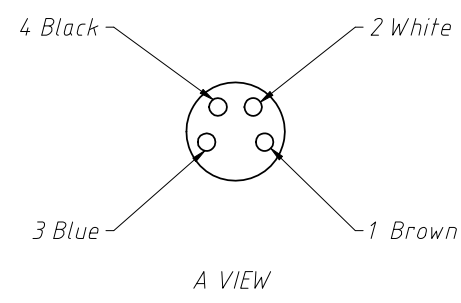


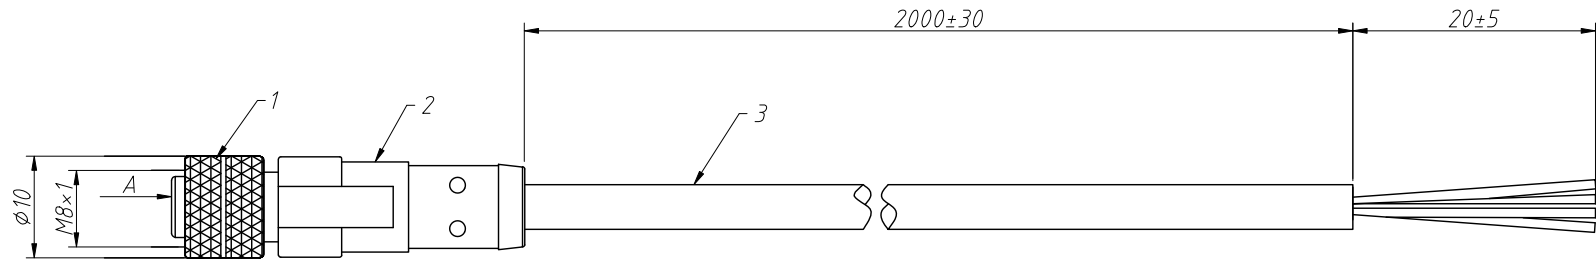

Material:

1.Connector:M8-4A Female With Metal Nut

2.Wire:4×0.25mm²(24AWG),Core Wire Skin PUR,
Black PUR Jacket ,OD 4.5,Temperature 80°C,VW-1

3.Body:Black PUR

Technical Requirement:

Connection mode: M8x1.0 Screw

Wiring mode: Soldering

Temperature Range:-25°C ~+80°C

Rated Voltage: 60V AC/DC

Rated Current:4A

Contact Resistance:5mΩ Max

Insulation Resistance:100M Ω Min

Quality Standard:IPC-A-620

Protection grade: IP67

Life:500 Times Min

Pollution degree: 3

ANGLE TOLERANCE		PROJECTION		Description:			
±3°				M8 Circular Connector			
GENERAL TOLERANCE		UNITS	mm	KLS P/N:		L-KLS15-M8A-P10-04-PUR-L2.0M-B-U	
.x	±0.30	SHEET SIZE	A4				NingBo KLS ELECTRONIC CO.,L TD.
.xx	±0.20	Draw:	Song	2025-05-29			
.xxx	±0.10	Check:	Daniel	2025-05-29			

1

2

3

4

5

6

7

8

1

2

3

4

5

6

7

8