


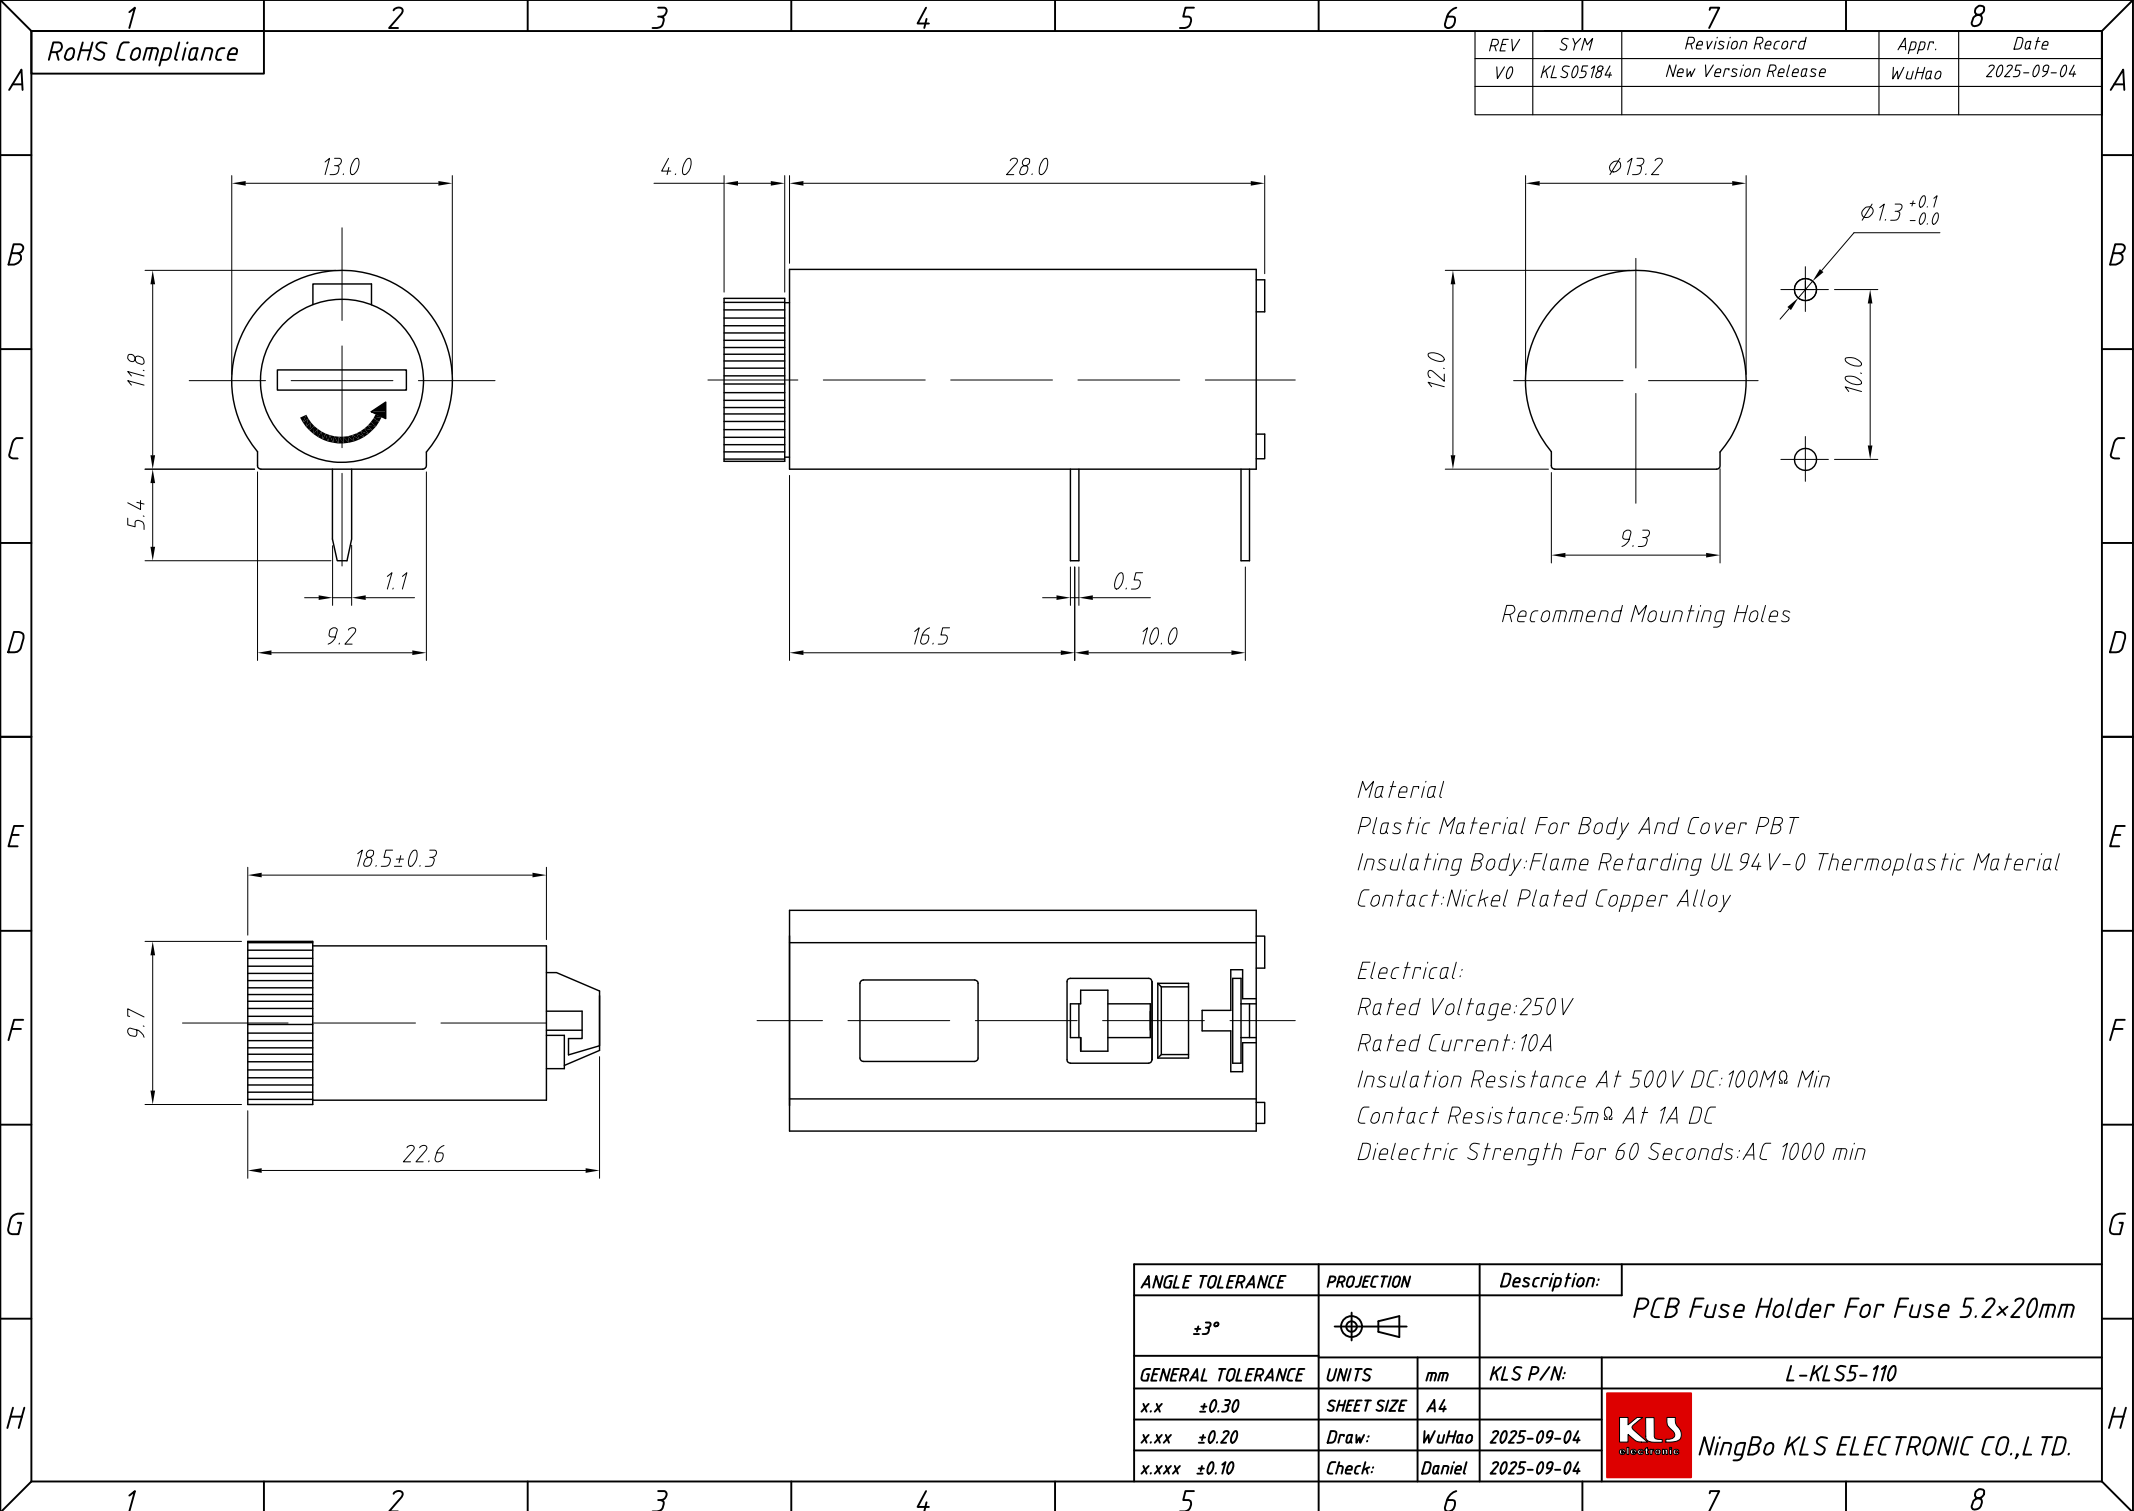

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS05184	New Version Release	WuHao	2025-09-04

Recommend Mounting Holes

Material
Plastic Material For Body And Cover PBT
Insulating Body:Flame Retarding UL 94 V-0 Thermoplastic Material
Contact:Nickel Plated Copper Alloy

Electrical:
Rated Voltage:250V
Rated Current:10A
Insulation Resistance At 500V DC:100M Ω Min
Contact Resistance:5m Ω At 1A DC
Dielectric Strength For 60 Seconds:AC 1000 min

ANGLE TOLERANCE	PROJECTION	Description:	PCB Fuse Holder For Fuse 5.2×20mm	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS5-110
x.x ±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	WuHao	2025-09-04	
x.xxx ±0.10	Check:	Daniel	2025-09-04	