


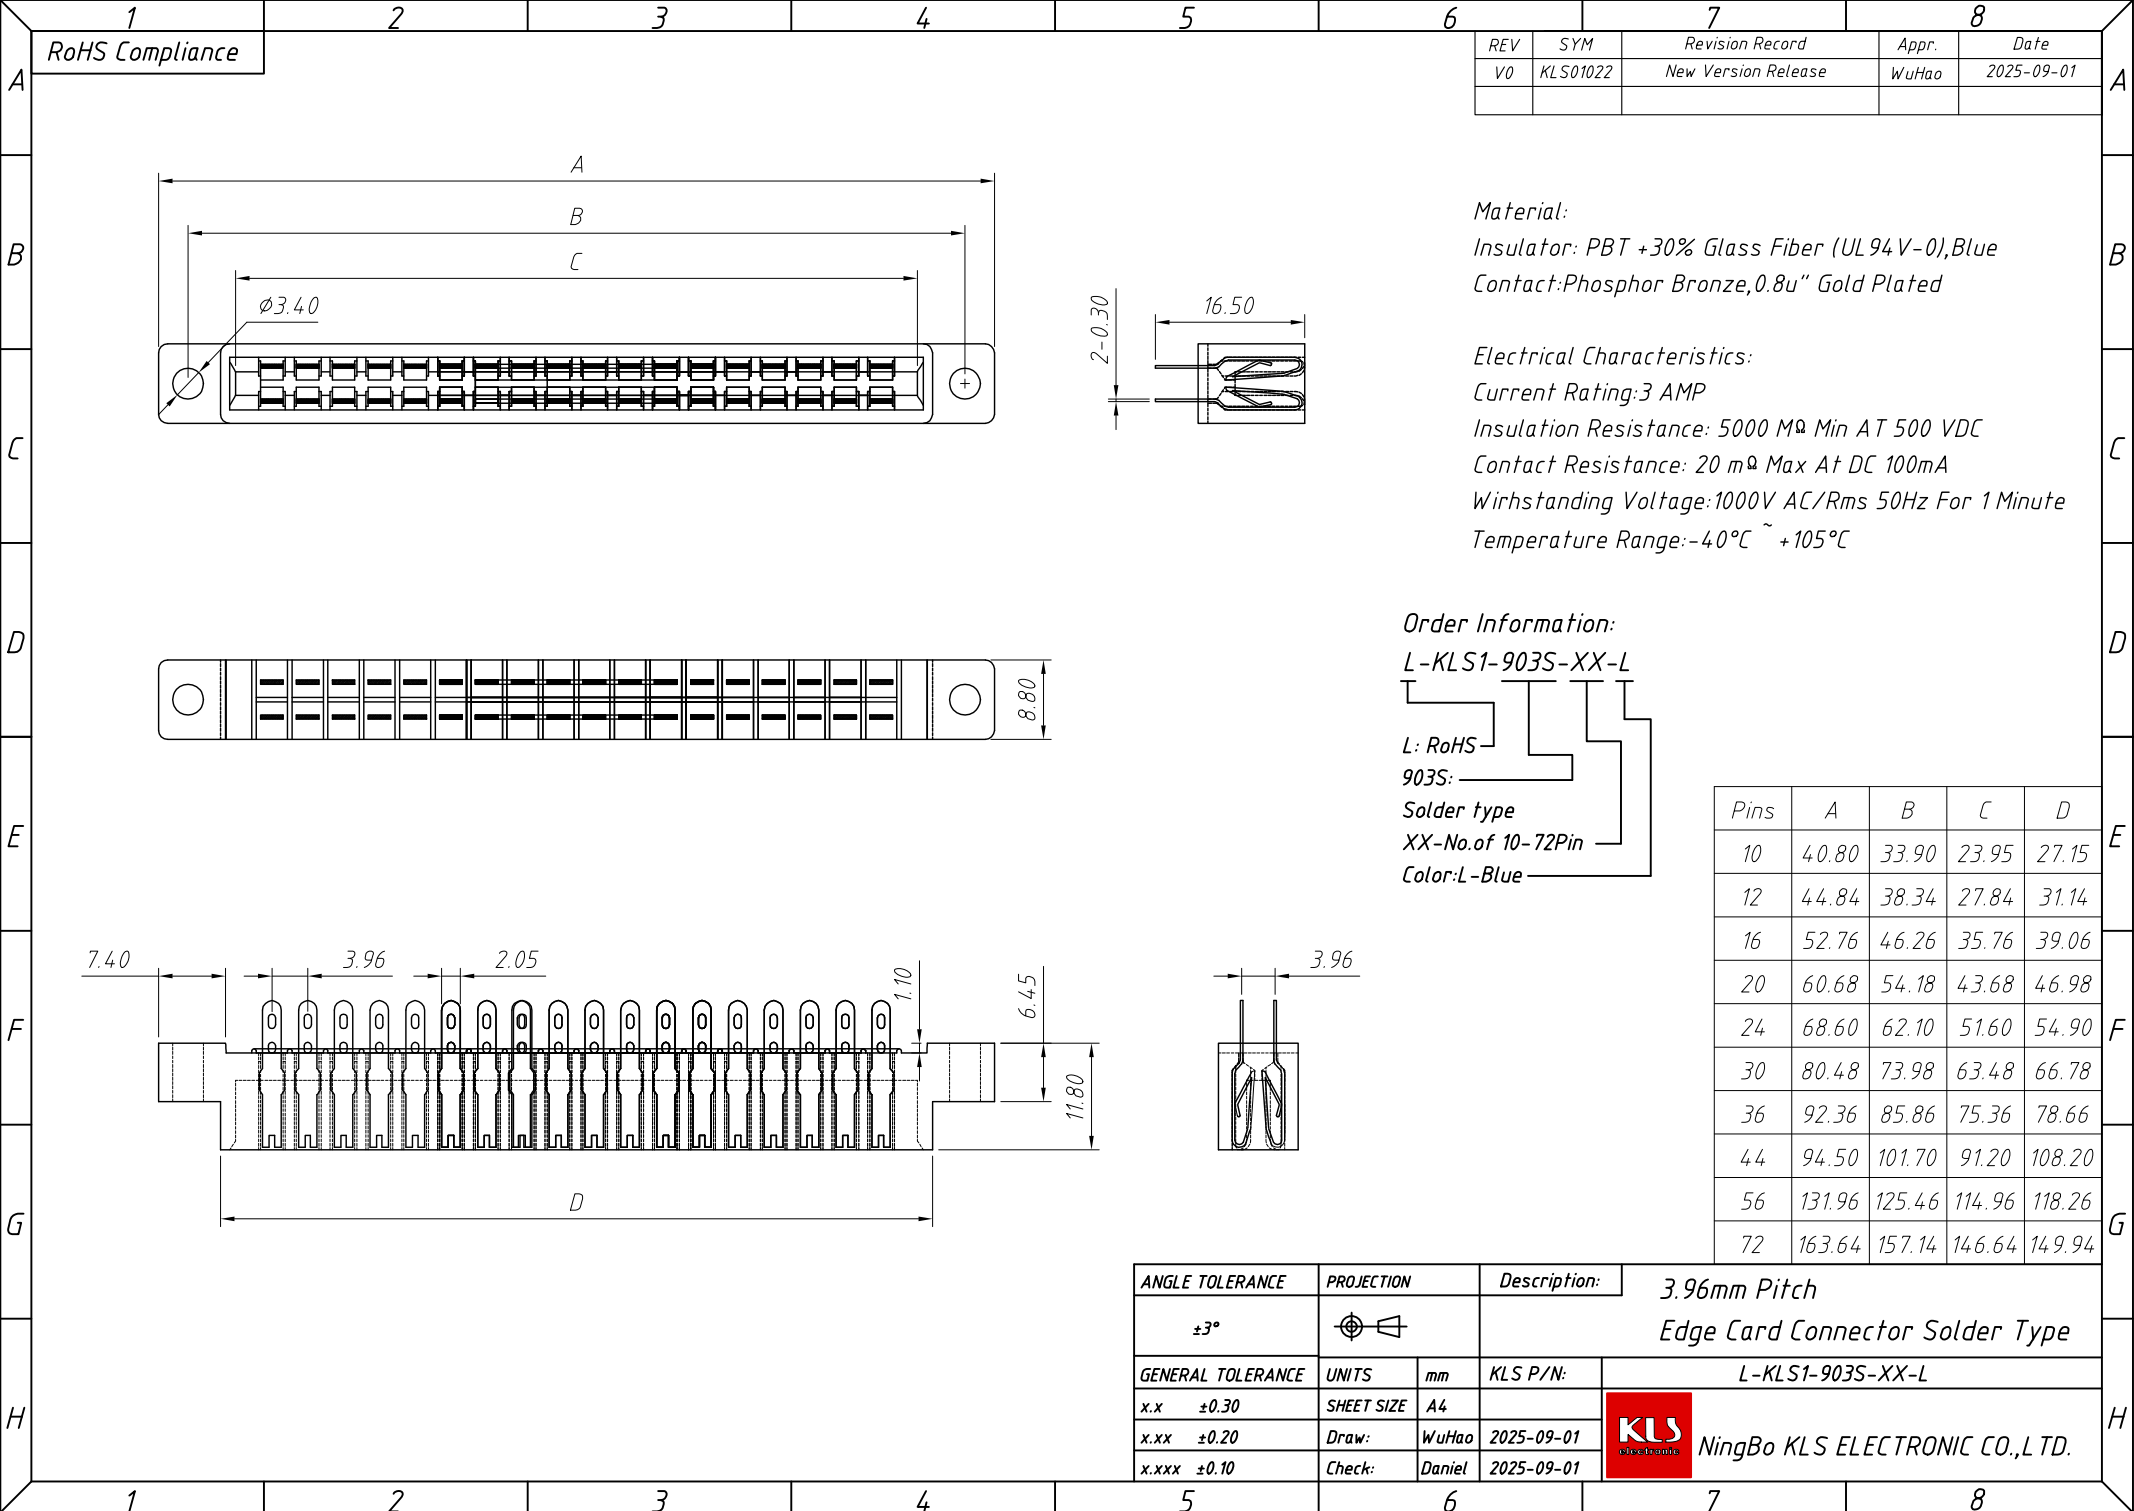

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01022	New Version Release	WuHao	2025-09-01

Material:
Insulator: PBT +30% Glass Fiber (UL 94V-0),Blue
Contact:Phosphor Bronze,0.8u" Gold Plated

Electrical Characteristics:
Current Rating:3 AMP
Insulation Resistance: 5000 M Ω Min AT 500 VDC
Contact Resistance: 20 m Ω Max AT DC 100mA
Wirhstanding Voltage:1000V AC/Rms 50Hz For 1 Minute
Temperature Range:-40°C ~ +105°C

Order Information:

L-KLS1-903S-XX-L

L: RoHS
903S:
Solder type
XX-No.of 10-72Pin
Color:L-Blue

Pins	A	B	C	D
10	40.80	33.90	23.95	27.15
12	44.84	38.34	27.84	31.14
16	52.76	46.26	35.76	39.06
20	60.68	54.18	43.68	46.98
24	68.60	62.10	51.60	54.90
30	80.48	73.98	63.48	66.78
36	92.36	85.86	75.36	78.66
44	94.50	101.70	91.20	108.20
56	131.96	125.46	114.96	118.26
72	163.64	157.14	146.64	149.94

ANGLE TOLERANCE	PROJECTION	Description:	3.96mm Pitch
$\pm 3^{\circ}$		Edge Card Connector Solder Type	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ± 0.30	SHEET SIZE	A4	L-KLS1-903S-XX-L
x.xx ± 0.20	Draw:	WuHao	2025-09-01
x.xxx ± 0.10	Check:	Daniel	2025-09-01



NingBo KLS ELECTRONIC CO.,L TD.