


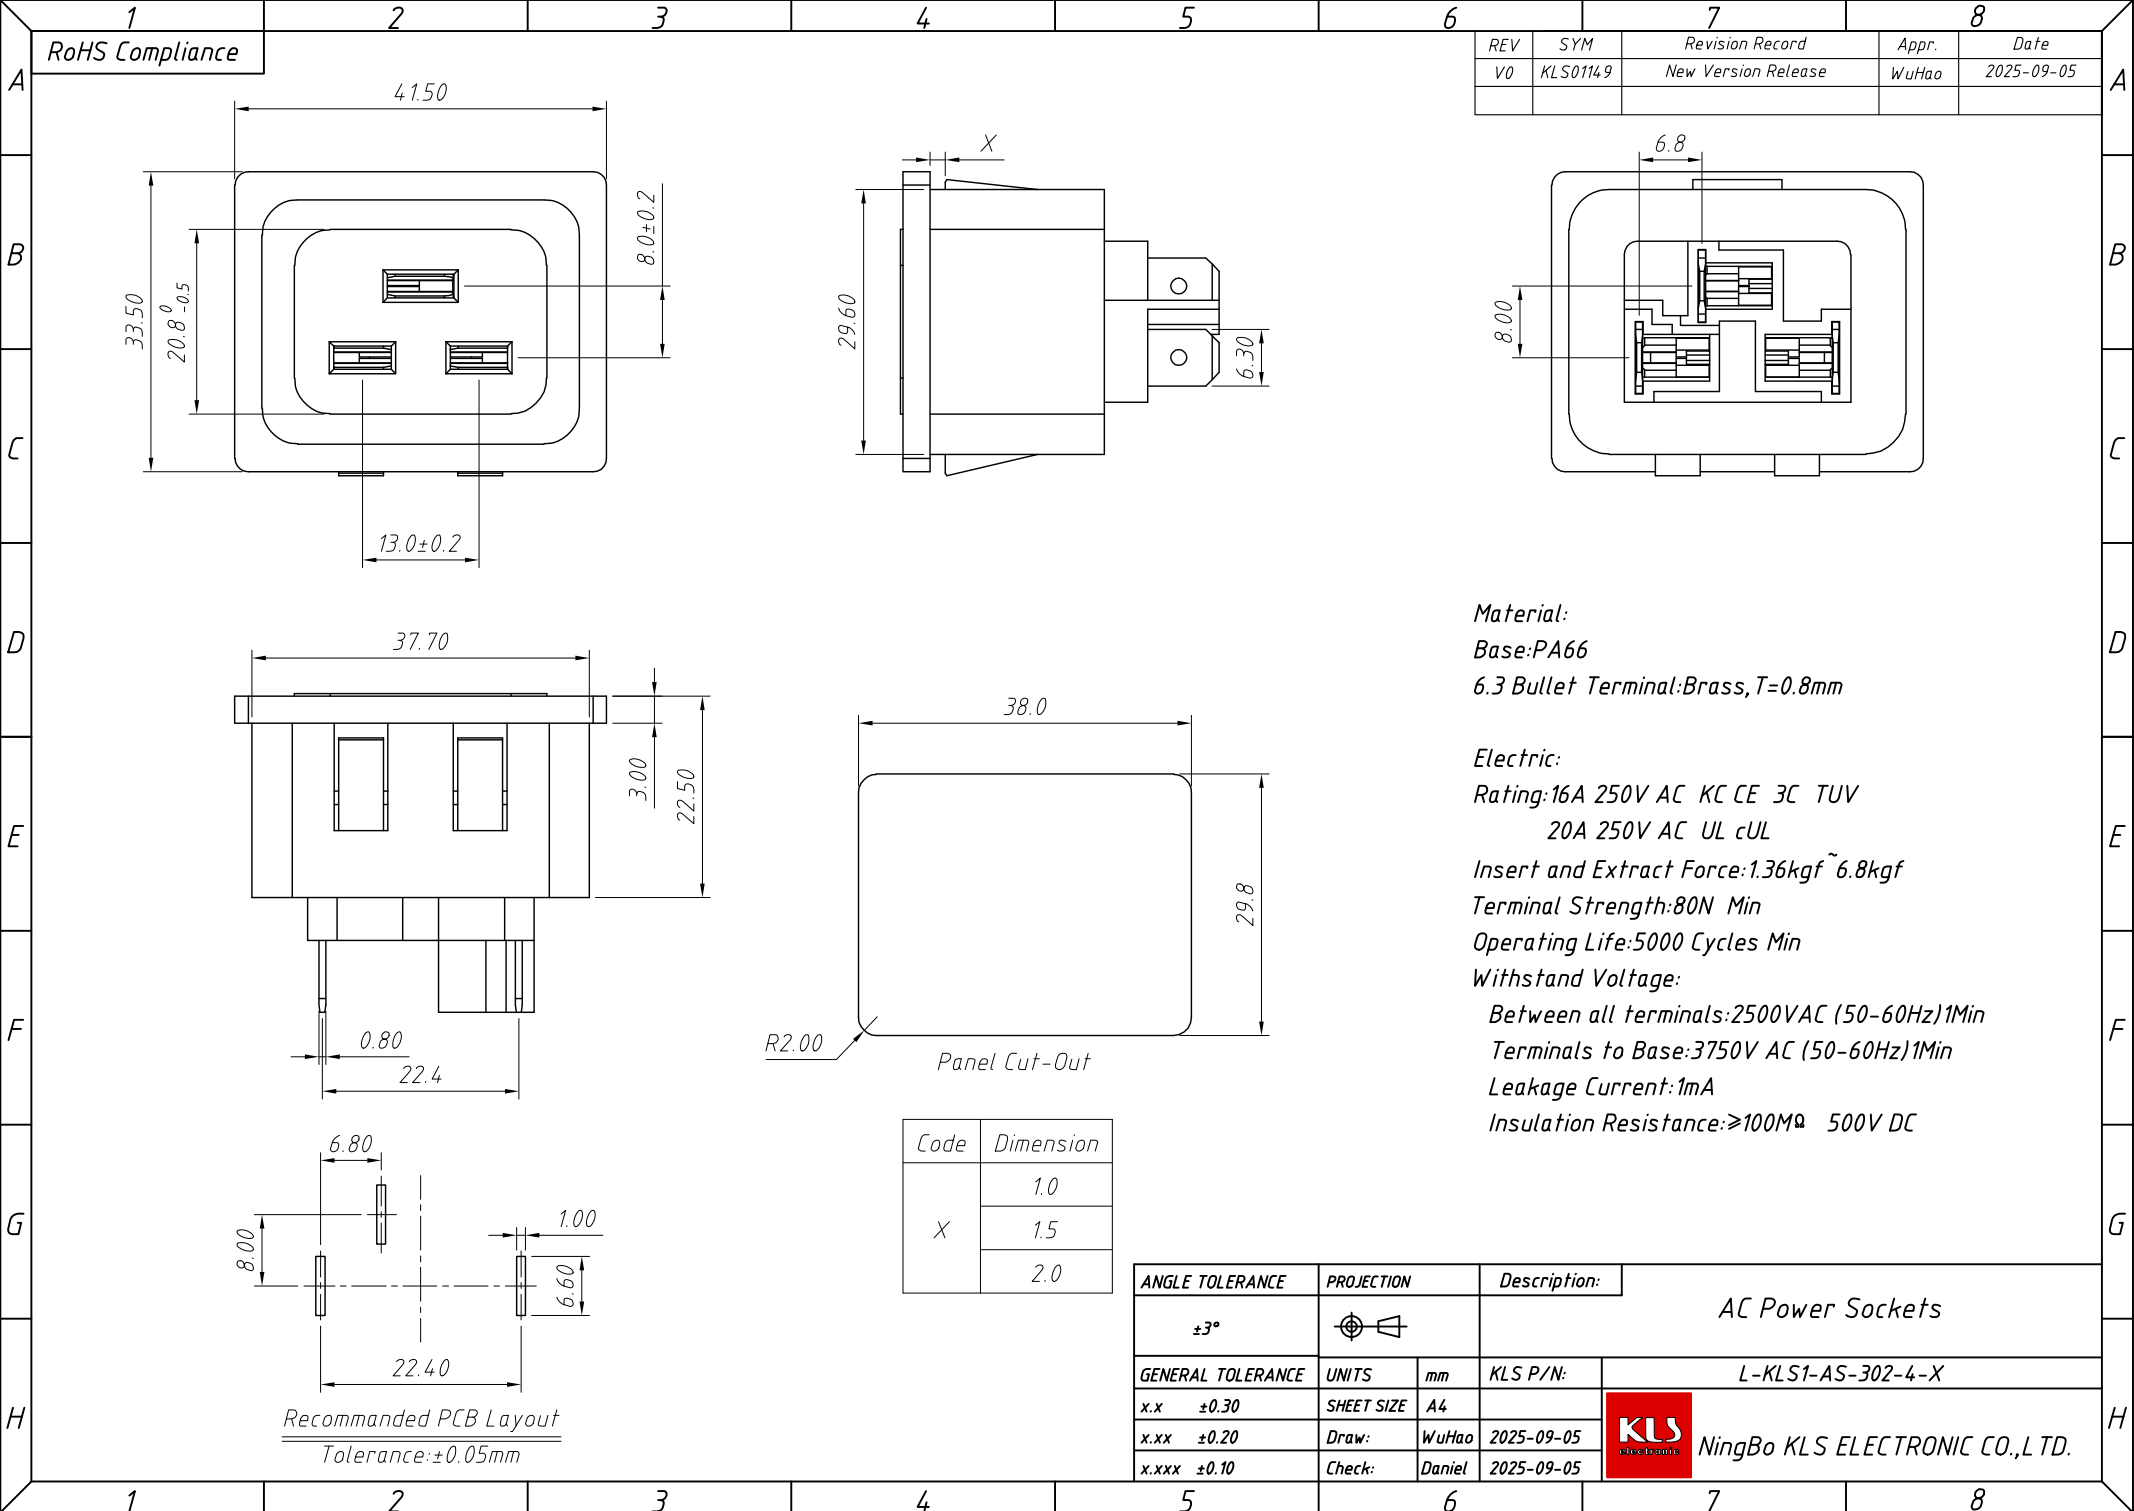

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS0114.9	New Version Release	WuHao	2025-09-05

Material:
Base:PA66
6.3 Bullet Terminal:Brass,T=0.8mm

Electric:
Rating:16A 250V AC KC CE 3C TUV
20A 250V AC UL cUL
Insert and Extract Force:1.36kgf~6.8kgf
Terminal Strength:80N Min
Operating Life:5000 Cycles Min
Withstand Voltage:
Between all terminals:2500VAC (50-60Hz)1Min
Terminals to Base:3750V AC (50-60Hz)1Min
Leakage Current:1mA
Insulation Resistance:≥100MΩ 500V DC

Code	Dimension
X	1.0
X	1.5
X	2.0

ANGLE TOLERANCE	PROJECTION	Description:
±3°		AC Power Sockets
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao 2025-09-05
x.xxx ±0.10	Check:	Daniel 2025-09-05



NingBo KLS ELECTRONIC CO.,LTD.