


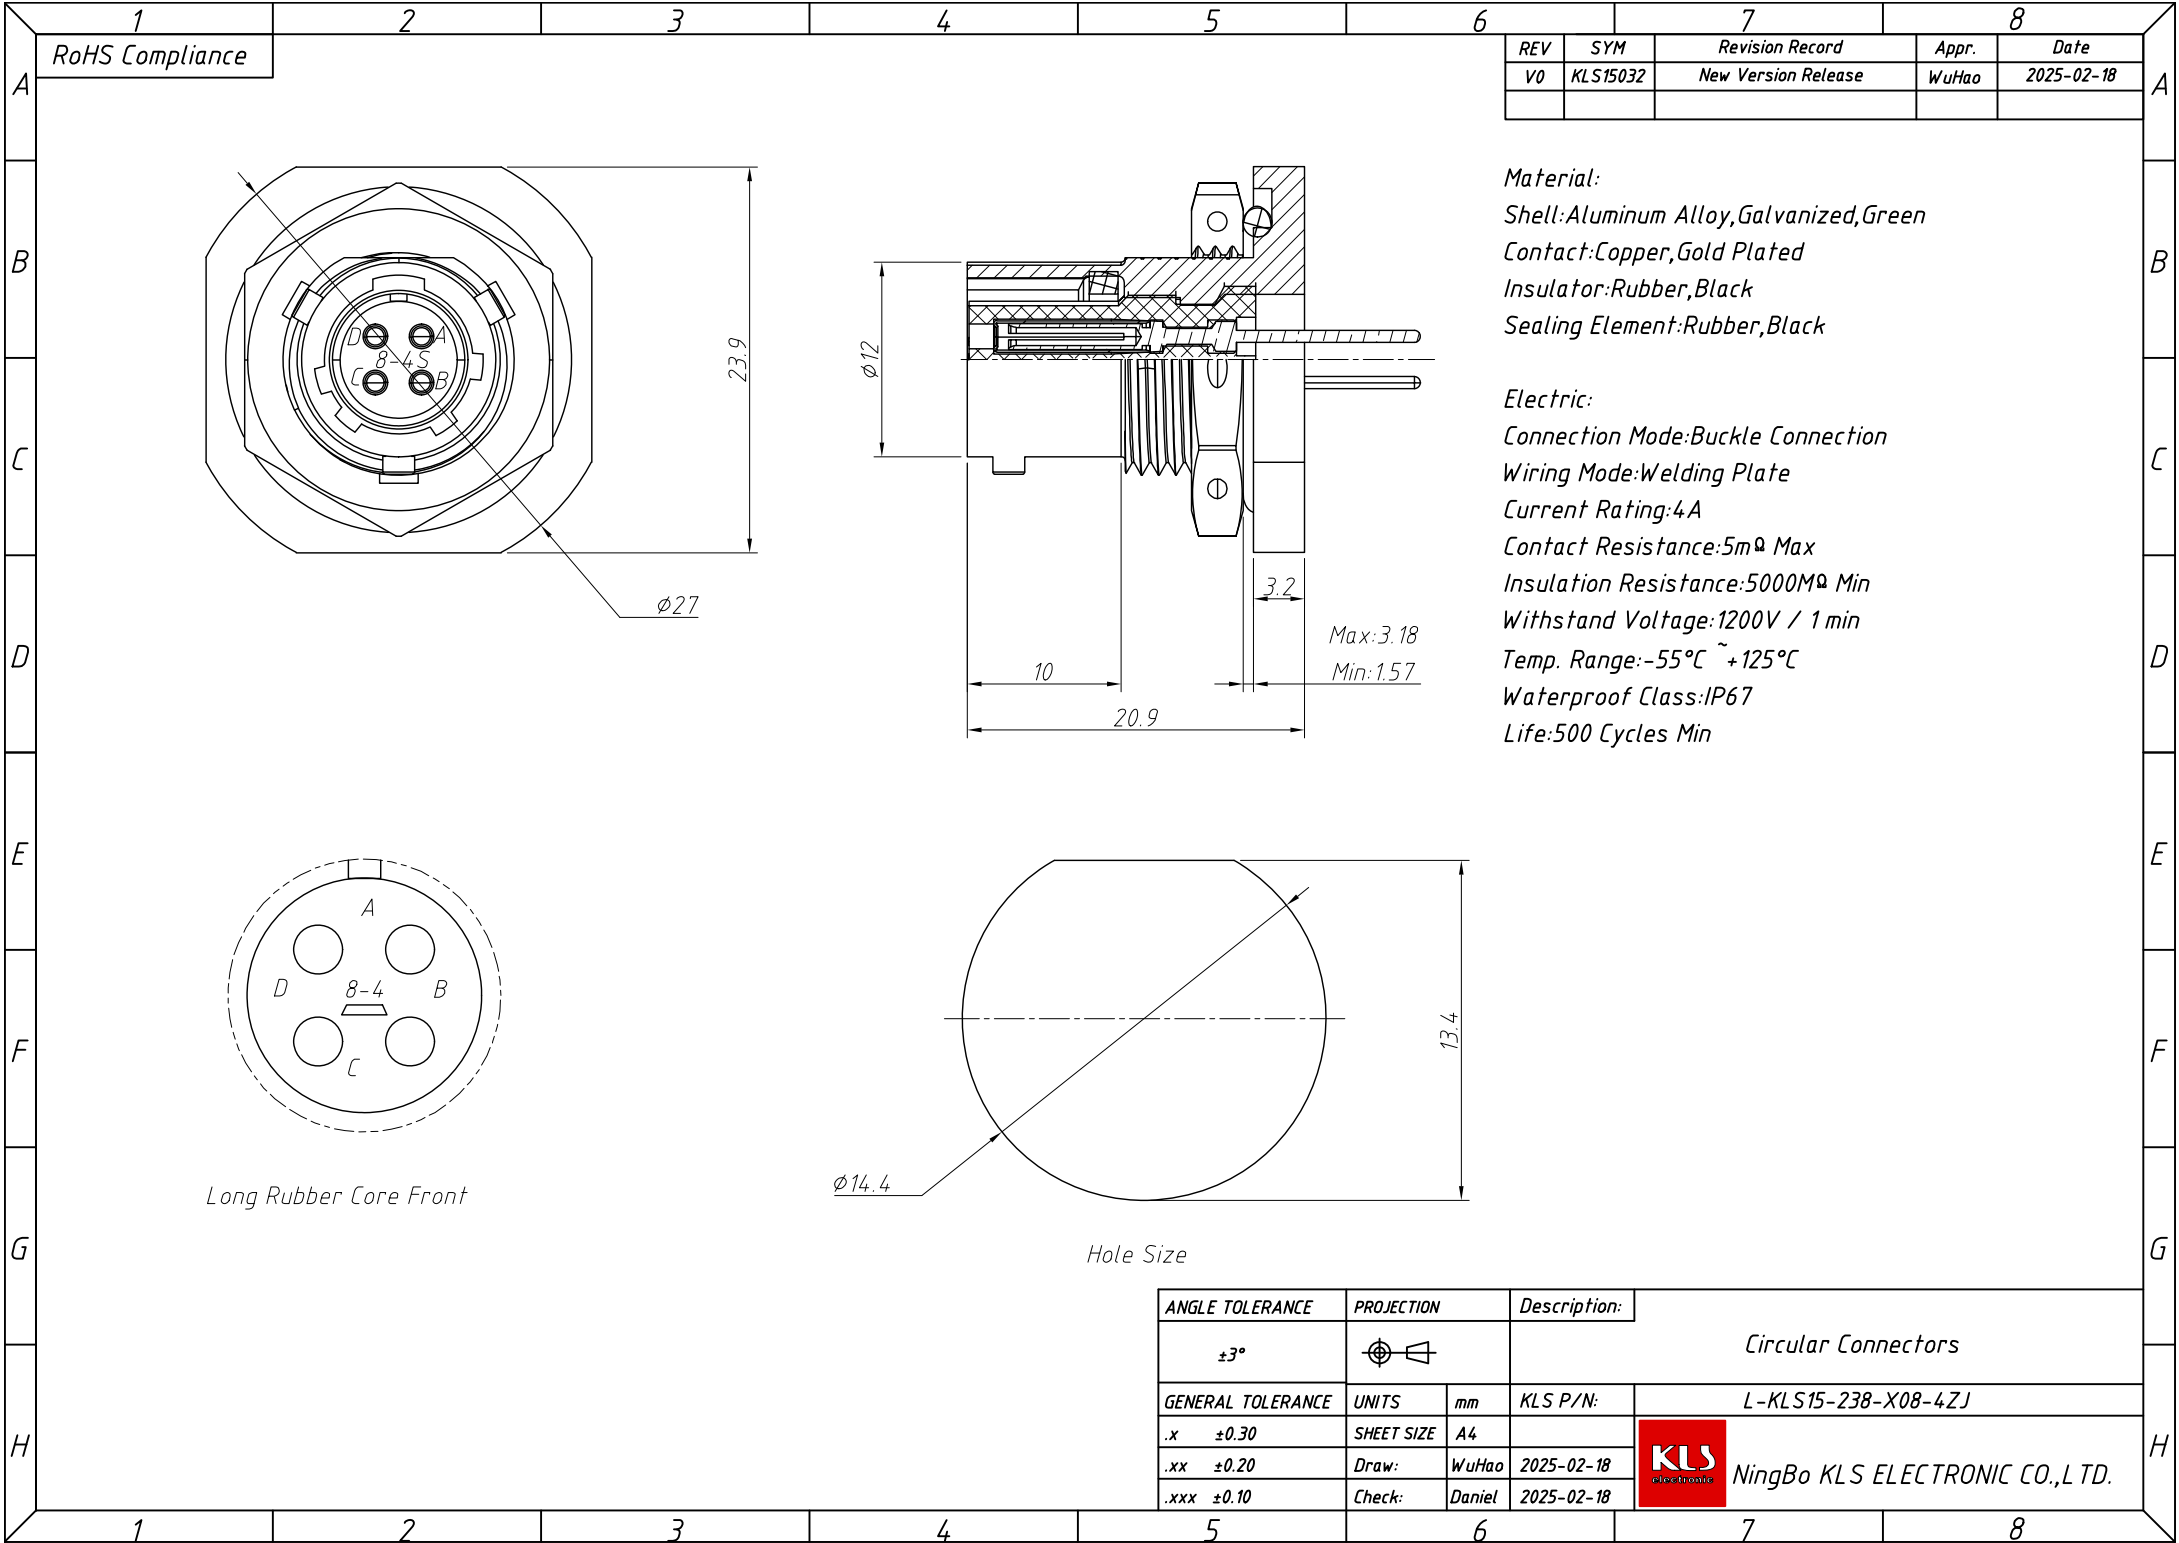


RoHS Compliance


REV	SYM	Revision Record	Appr.	Date
V0	KLS15032	New Version Release	WuHao	2025-02-18

Material:
Shell: Aluminum Alloy, Galvanized, Green
Contact: Copper, Gold Plated
Insulator: Rubber, Black
Sealing Element: Rubber, Black

Electric:
Connection Mode: Buckle Connection
Wiring Mode: Welding Plate
Current Rating: 4A
Contact Resistance: 5mΩ Max
Insulation Resistance: 5000MΩ Min
Withstand Voltage: 1200V / 1min
Temp. Range: -55°C ~ +125°C
Waterproof Class: IP67
Life: 500 Cycles Min



Long Rubber Core Front

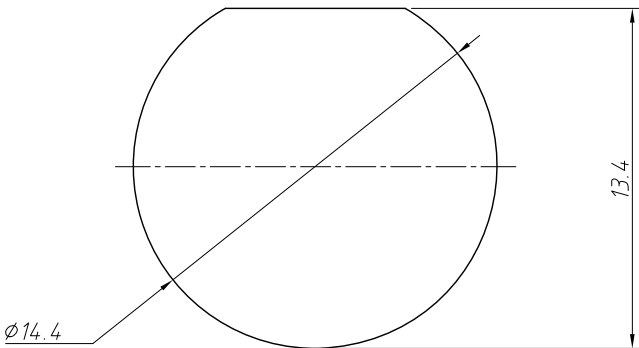

Hole Size

ANGLE TOLERANCE		PROJECTION	Description:	
±3°			Circular Connectors	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
.x	±0.30	SHEET SIZE	A4	L-KLS15-238-X08-4ZJ
.xx	±0.20	Draw:	WuHao	2025-02-18
.xxx	±0.10	Check:	Daniel	2025-02-18



NingBo KLS ELECTRONIC CO.,LTD.