

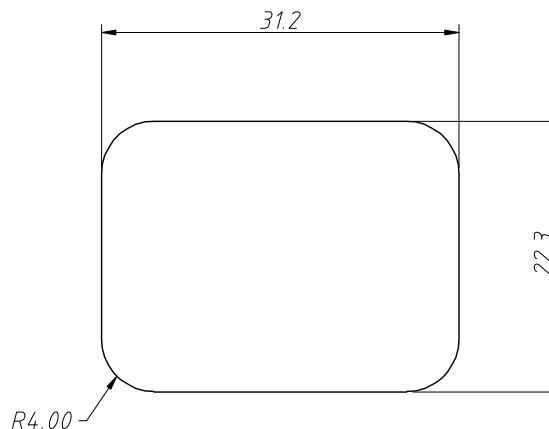
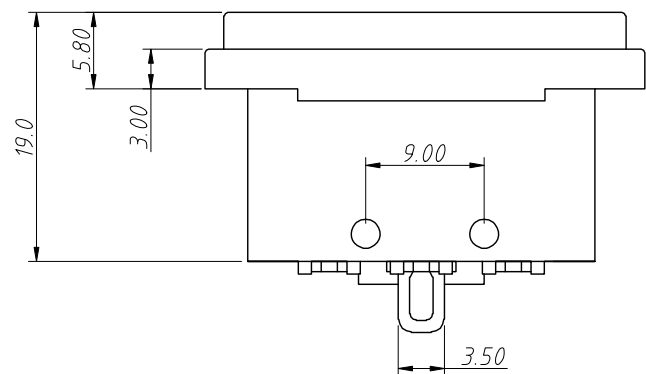
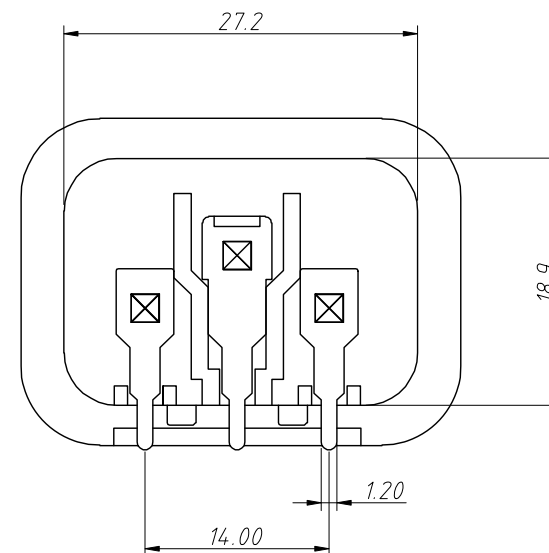
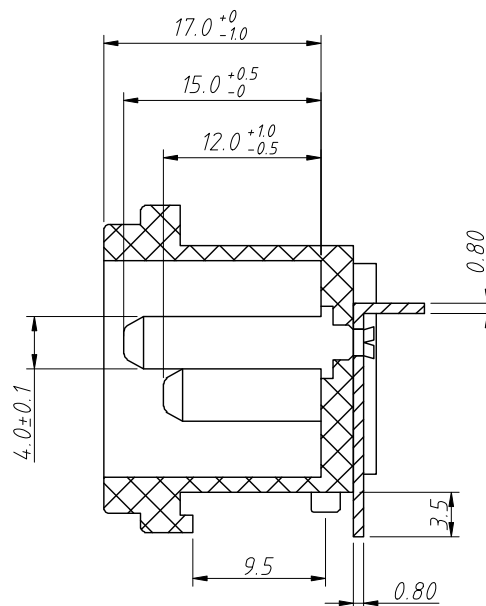


RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01149	New Version Release	Song	2025-09-11

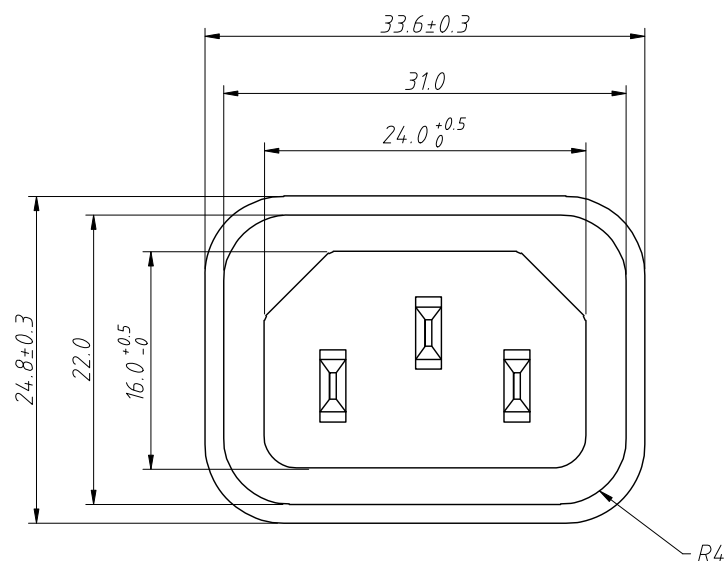

PANEL CUT-OUT

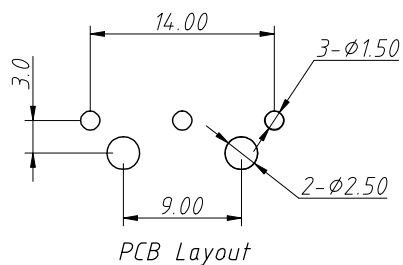

PCB Layout

Material:
Base:PA66
Grounding pin:Brass,T=2.0mm
Current-carrying pin:Brass,T=2.0mm
PCB Terminal:Brass,T=0.8mm

Electric:
Rating:15A 250V AC T105 UL cUL
10A 250V AC TUV 3C KC
Withstand Voltage:
Between All Terminals:2500VAC (50-60Hz)1min
Terminals to Base:3750V AC (50-60Hz)1min
Leakage Current:1mA
Insulation Resistance:100MΩ 500V DC
Glow-wire temp.:750°C

ANGLE TOLERANCE	PROJECTION	Description:	AC Inlet	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-AS-305-10
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Song	2025-09-11	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2025-09-11	