


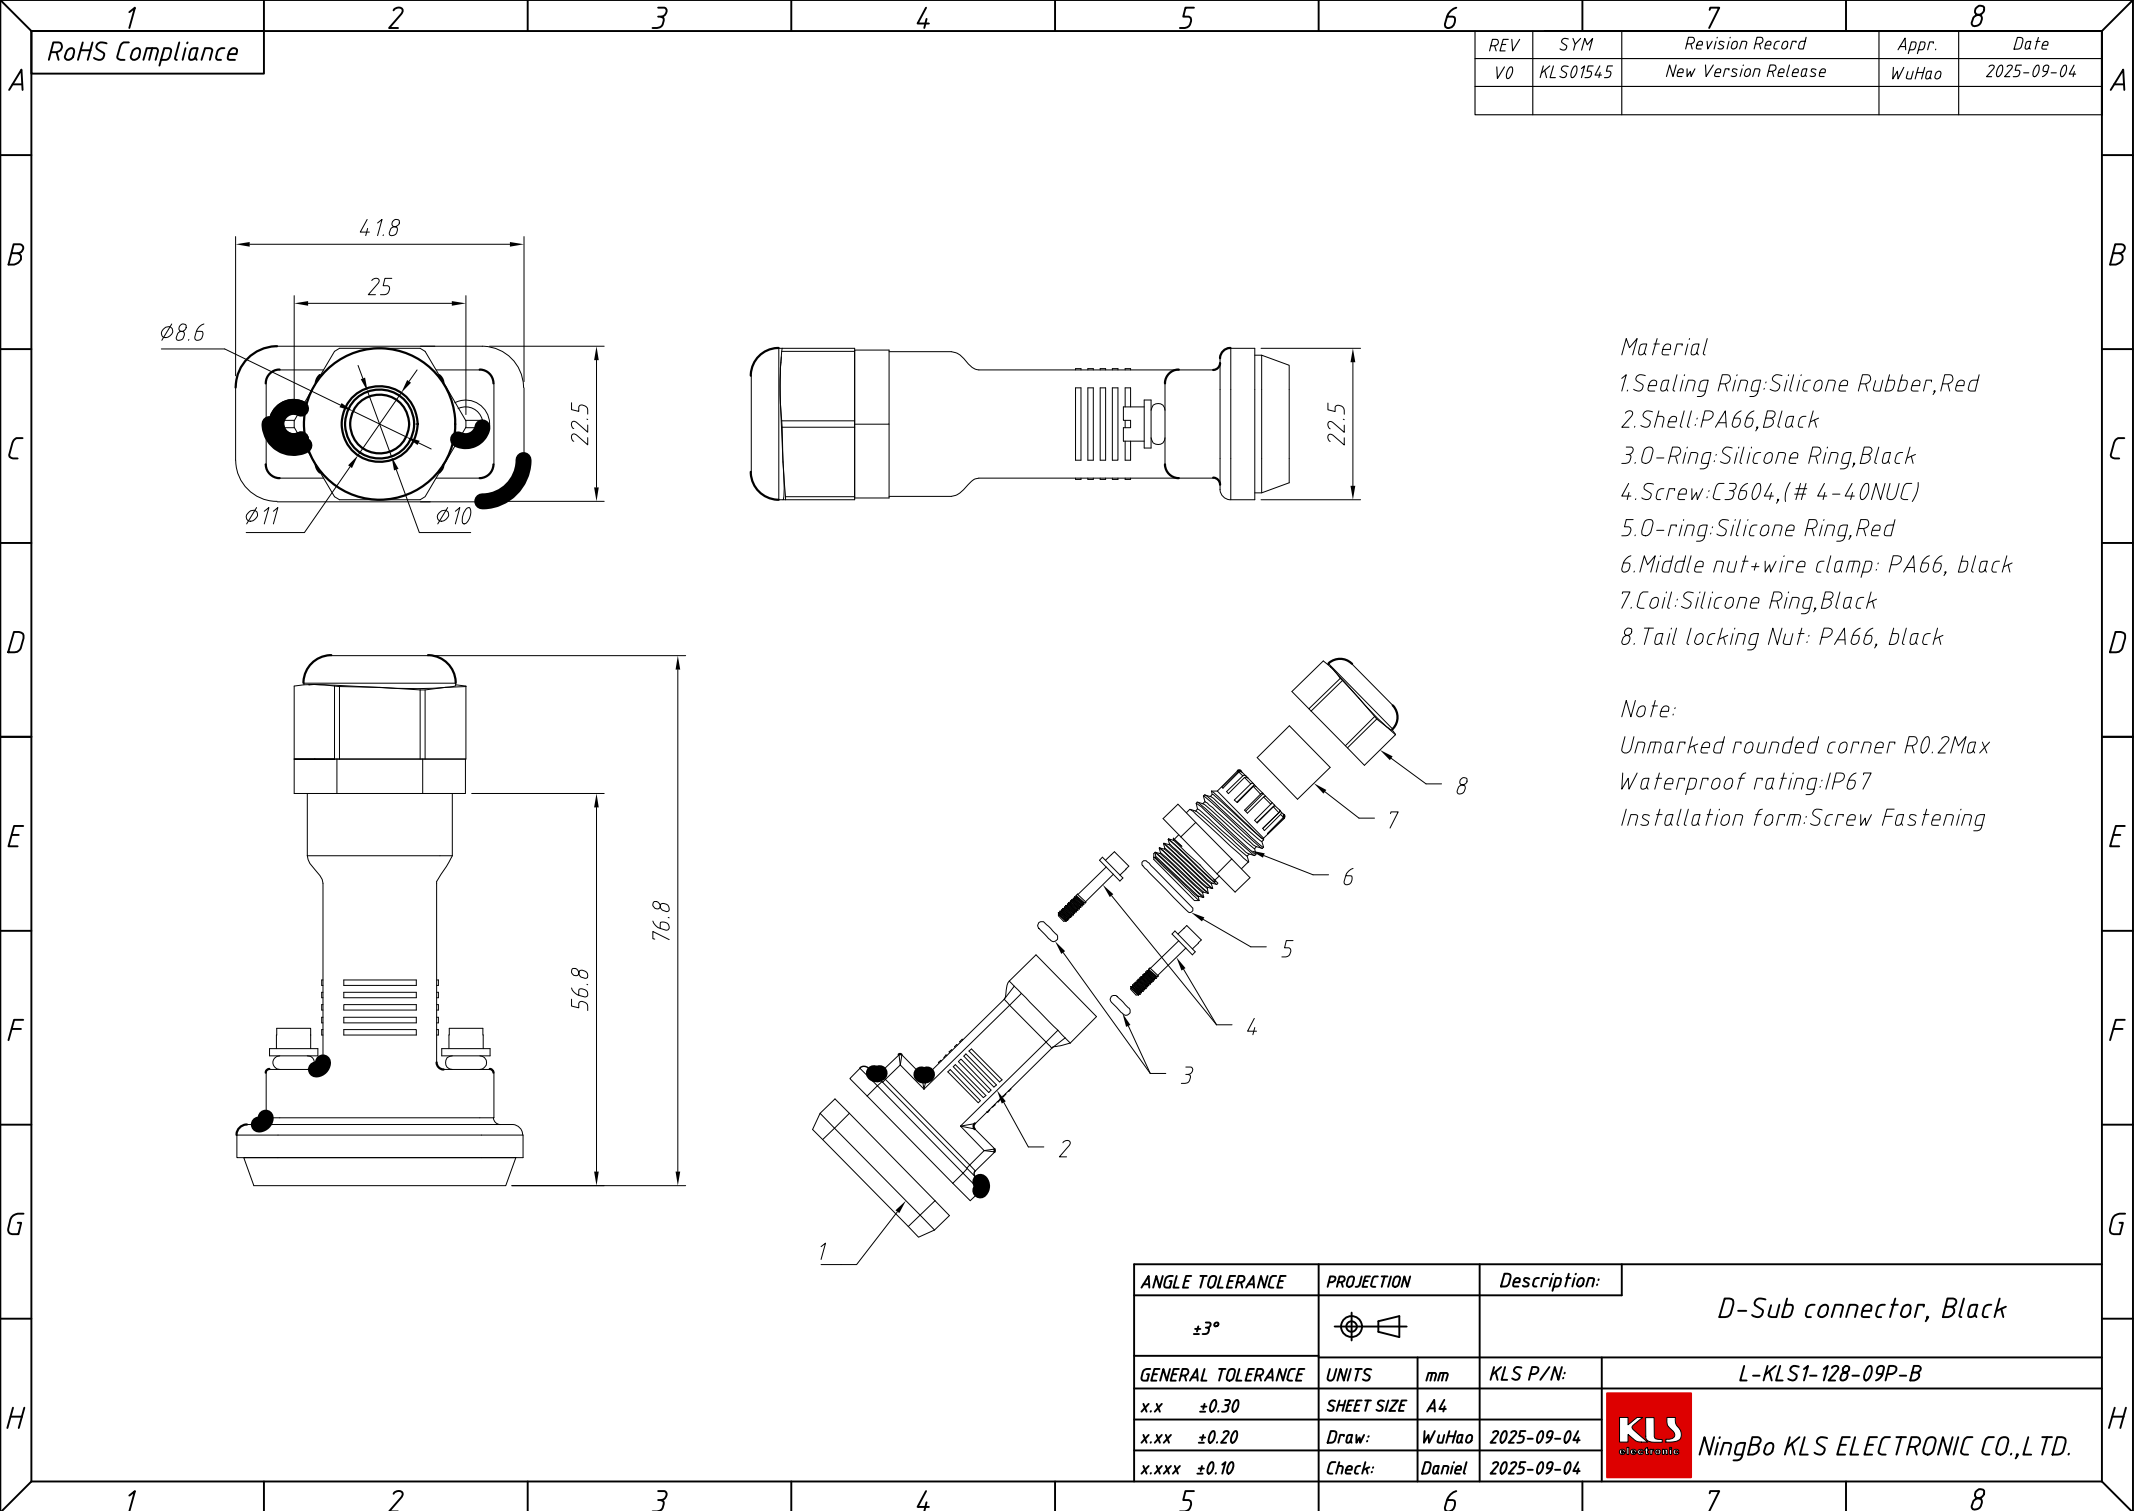

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01545	New Version Release	WuHao	2025-09-04

- Material
- 1.Sealing Ring:Silicone Rubber,Red
 - 2.Shell:PA66,Black
 - 3.O-Ring:Silicone Ring,Black
 - 4.Screw:C3604,(# 4-40NUC)
 - 5.O-ring:Silicone Ring,Red
 - 6.Middle nut+wire clamp: PA66, black
 - 7.Coil:Silicone Ring,Black
 - 8.Tail locking Nut: PA66, black

Note:

Unmarked rounded corner R0.2Max

Waterproof rating:IP67

Installation form:Screw Fastening

ANGLE TOLERANCE	PROJECTION	Description:
±3°		D-Sub connector, Black
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao 2025-09-04
x.xxx ±0.10	Check:	Daniel 2025-09-04

NingBo KLS ELECTRONIC CO.,L TD.