

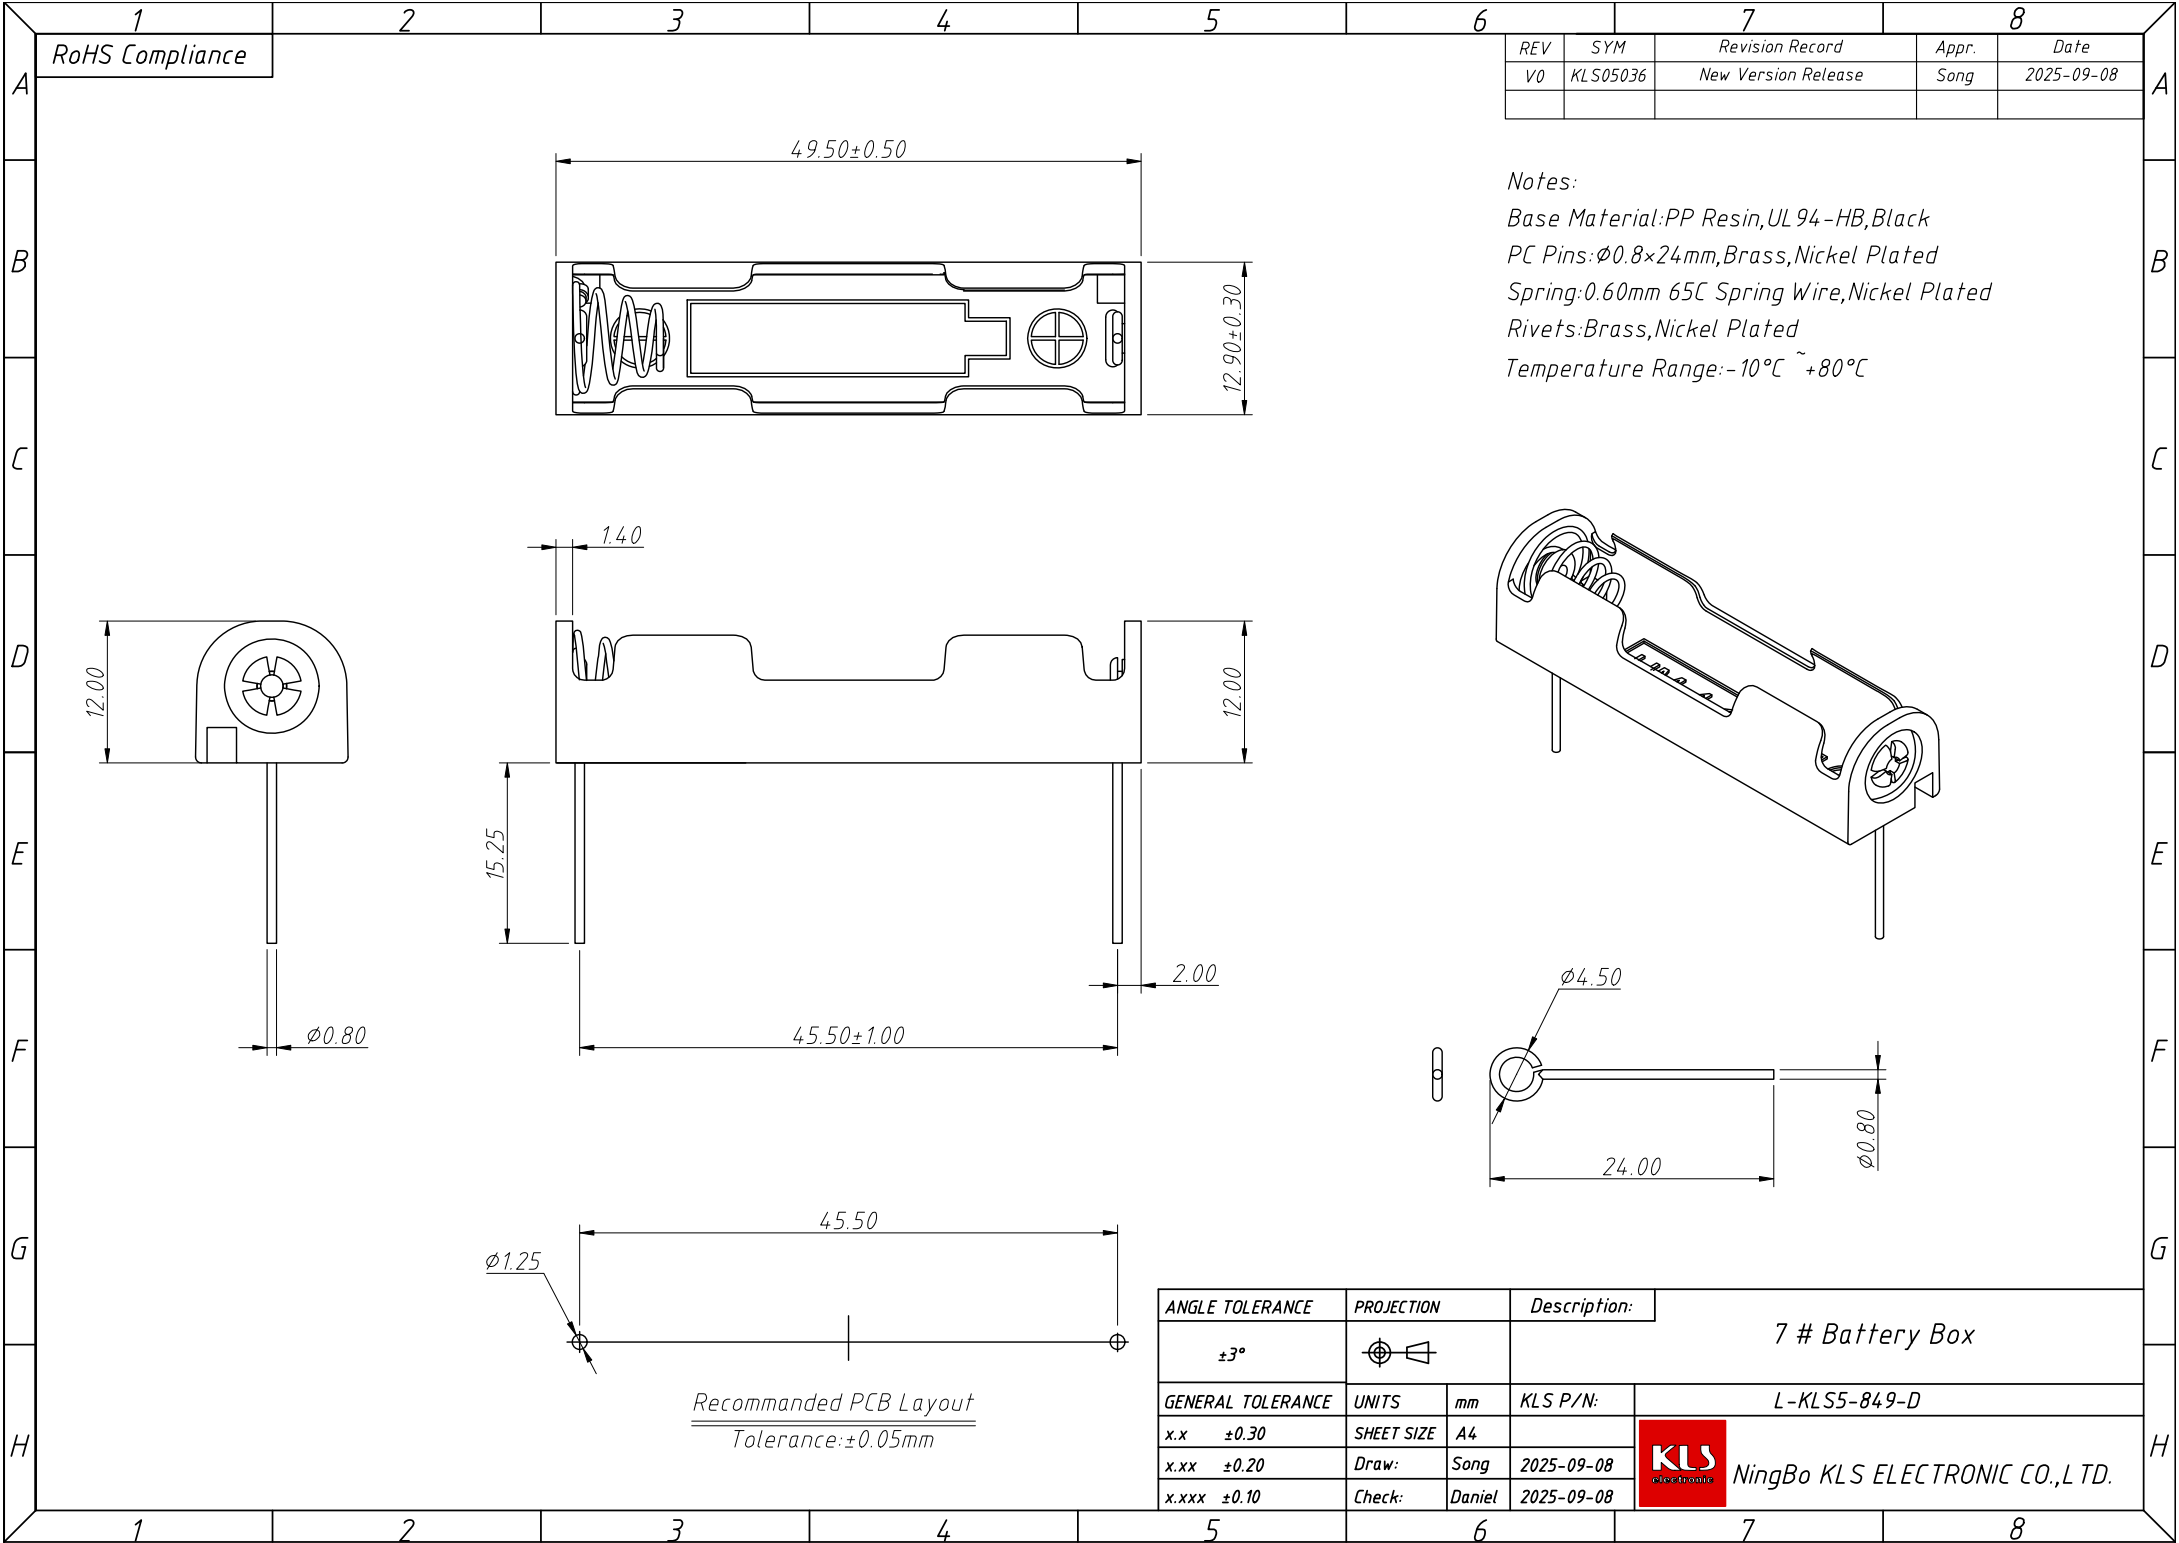


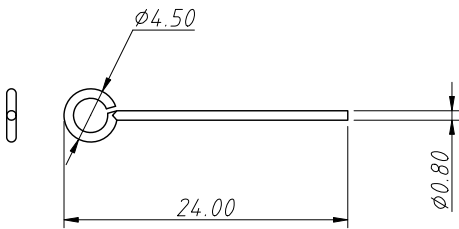

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS05036	New Version Release	Song	2025-09-08

Notes:
Base Material:PP Resin,UL 94-HB,Black
PC Pins: $\phi 0.8 \times 24$ mm,Brass,Nickel Plated
Spring:0.60mm 65C Spring Wire,Nickel Plated
Rivets:Brass,Nickel Plated
Temperature Range:-10°C ~ +80°C

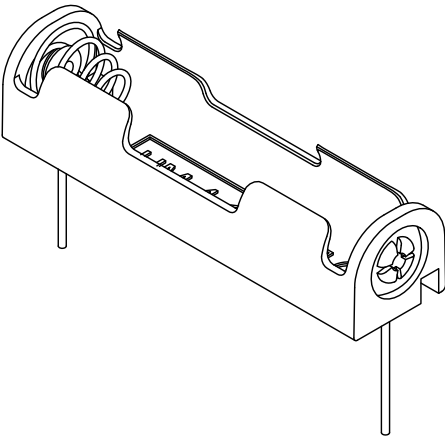

Recommanded PCB Layout
Tolerance: ± 0.05 mm

ANGLE TOLERANCE	PROJECTION	Description:	7 # Battery Box	
$\pm 3^{\circ}$				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS5-849-D
x.x ± 0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,LTD.
x.xx ± 0.20	Draw:	Song	2025-09-08	
x.xxx ± 0.10	Check:	Daniel	2025-09-08	