


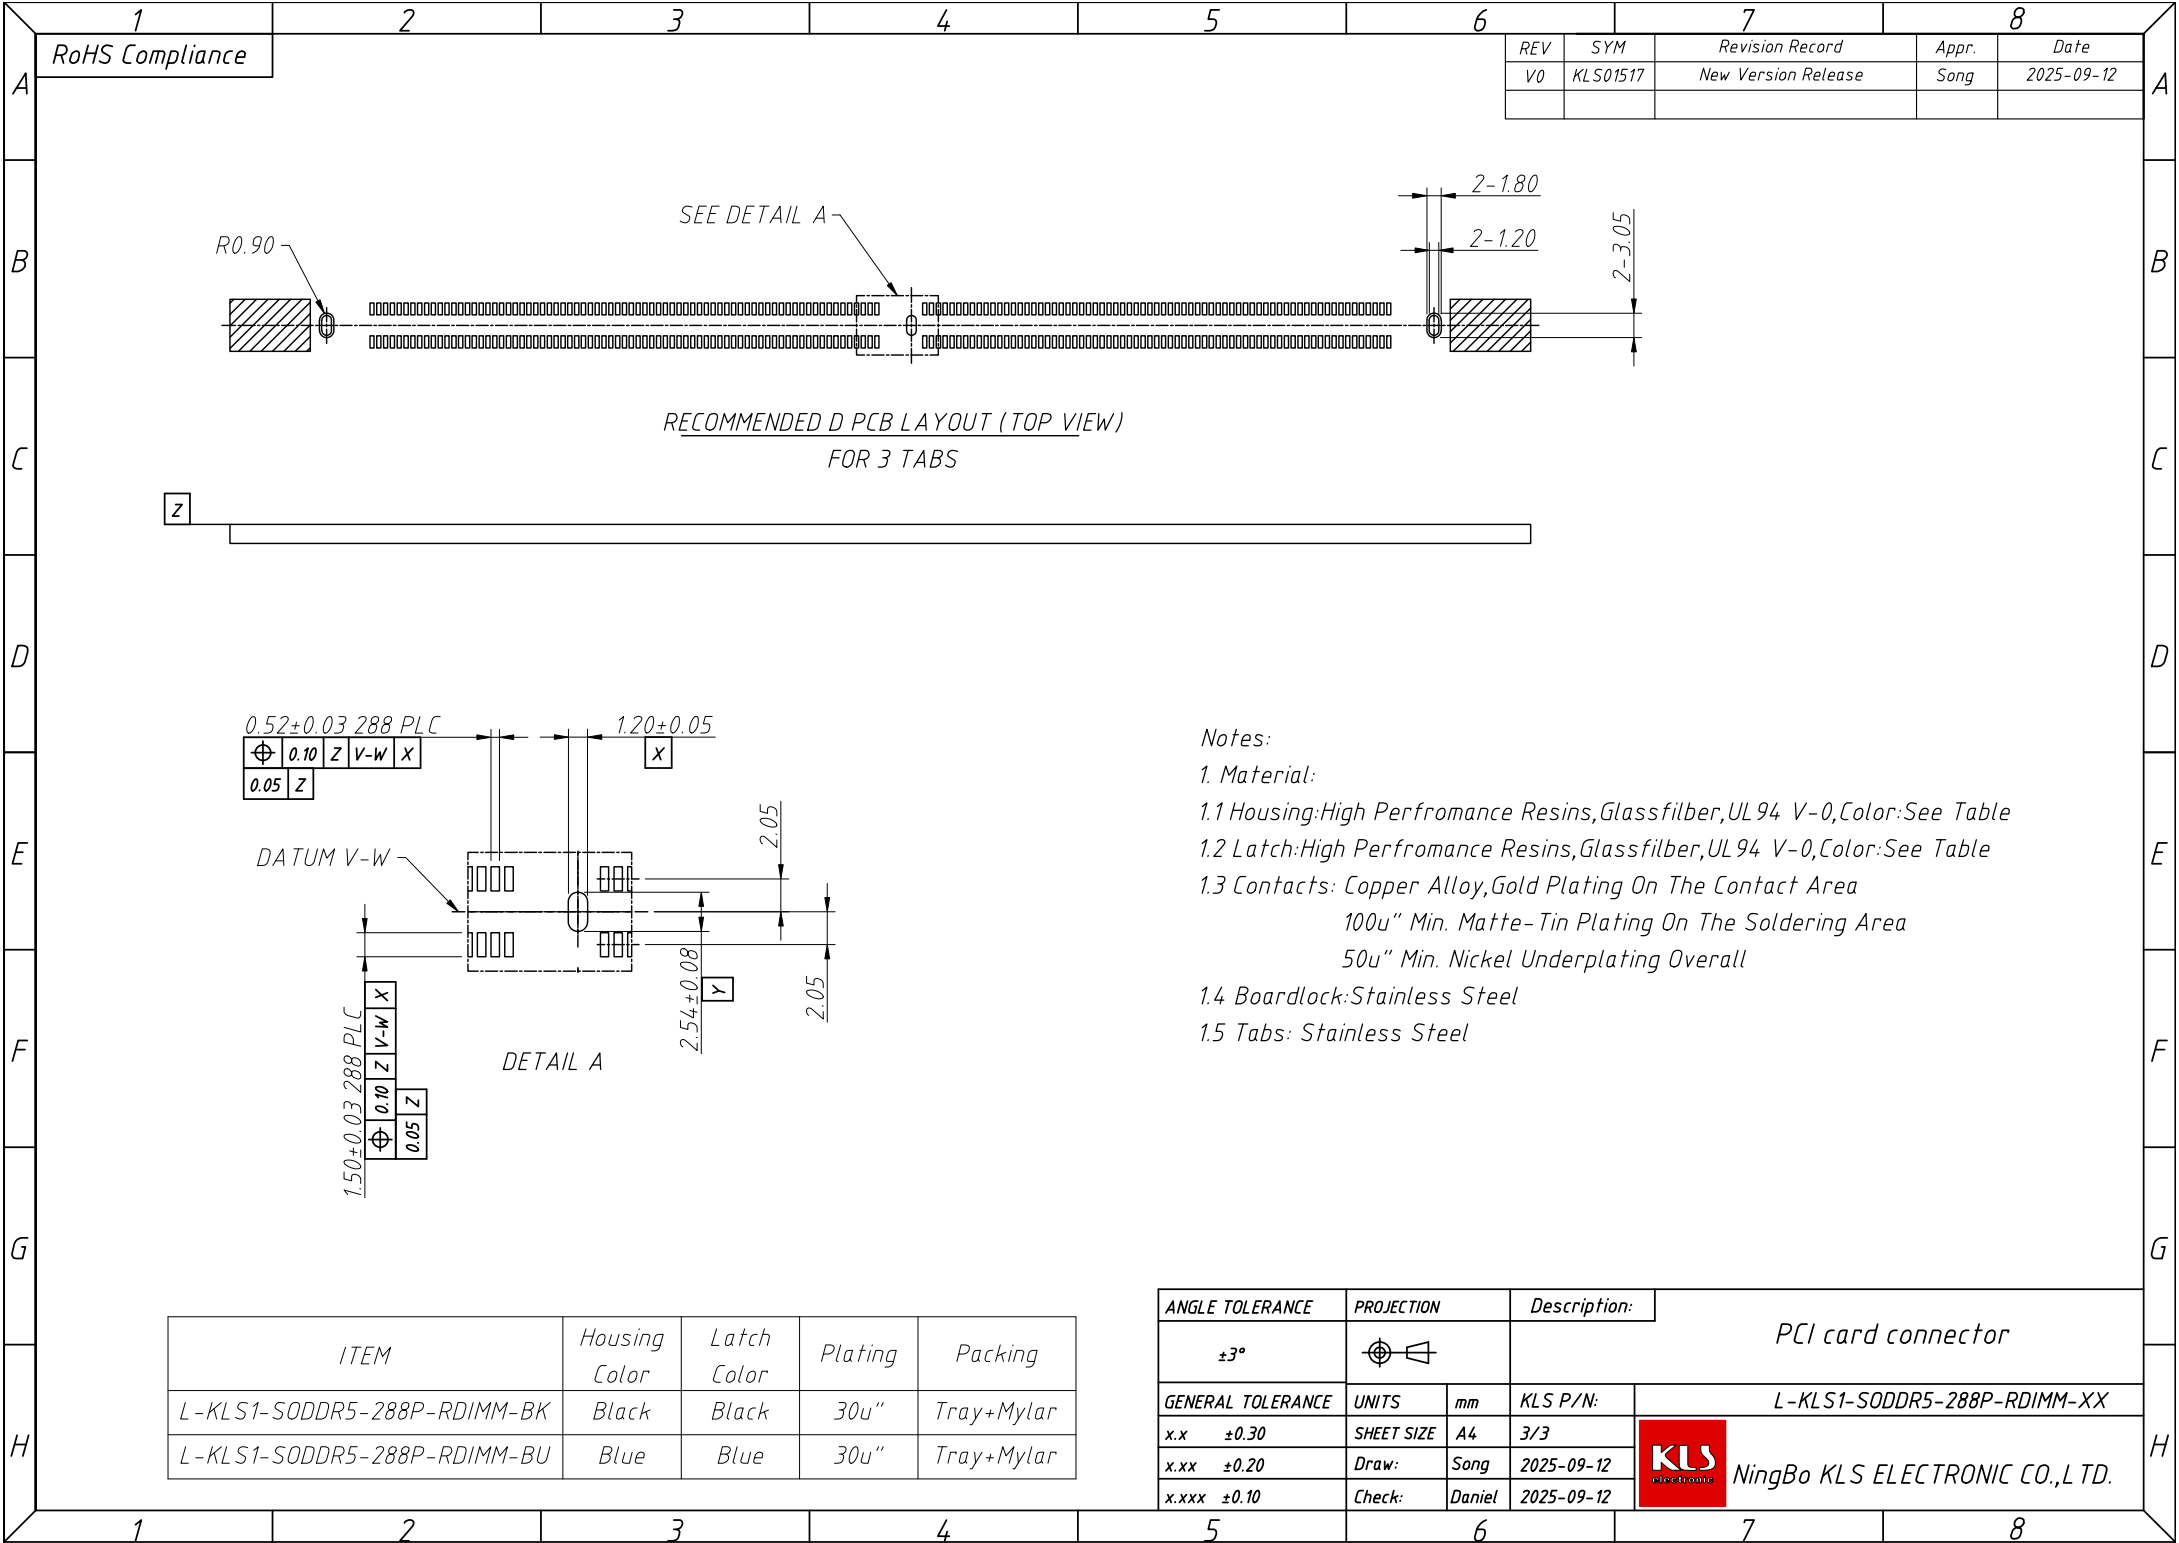

RECOMMENDED D PCB LAYOUT (TOP VIEW)
FOR 3 TABS

- Notes:
- 1. Material:
 - 1.1 Housing: High Performance Resins, Glassfiber, UL 94 V-0, Color: See Table
 - 1.2 Latch: High Performance Resins, Glassfiber, UL 94 V-0, Color: See Table
 - 1.3 Contacts: Copper Alloy, Gold Plating On The Contact Area
100u" Min. Matte-Tin Plating On The Soldering Area
50u" Min. Nickel Underplating Overall
 - 1.4 Boardlock: Stainless Steel
 - 1.5 Tabs: Stainless Steel

ITEM	Housing Color	Latch Color	Plating	Packing
L-KLS1-SODDR5-288P-RDIMM-BK	Black	Black	30u"	Tray+Mylar
L-KLS1-SODDR5-288P-RDIMM-BU	Blue	Blue	30u"	Tray+Mylar

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PCI card connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	±0.30	SHEET SIZE	A4	L-KLS1-SODDR5-288P-RDIMM-XX	
x.xx	±0.20	Draw:	Song	NingBo KLS ELECTRONIC CO.,L TD.	
x.xxx	±0.10	Check:	Daniel		