


FUSE AND FUSE HOLDER

Cell Box Series

KLS5-817 UM-4 OR "AAA" Cell Box Series

WIRE: UL 1007, # 26 AWG
BLACK & RED: 150 MM $\pm$ 5MM
STRIP & TIN: 5 MM $\pm$ 1MM
MATERIAL: A. B. S. RESIN BLACK COLOR
SPRING: .6 MM 65C SPRING WIRE
DESCR.: FOR ONE "AAA" CELLS

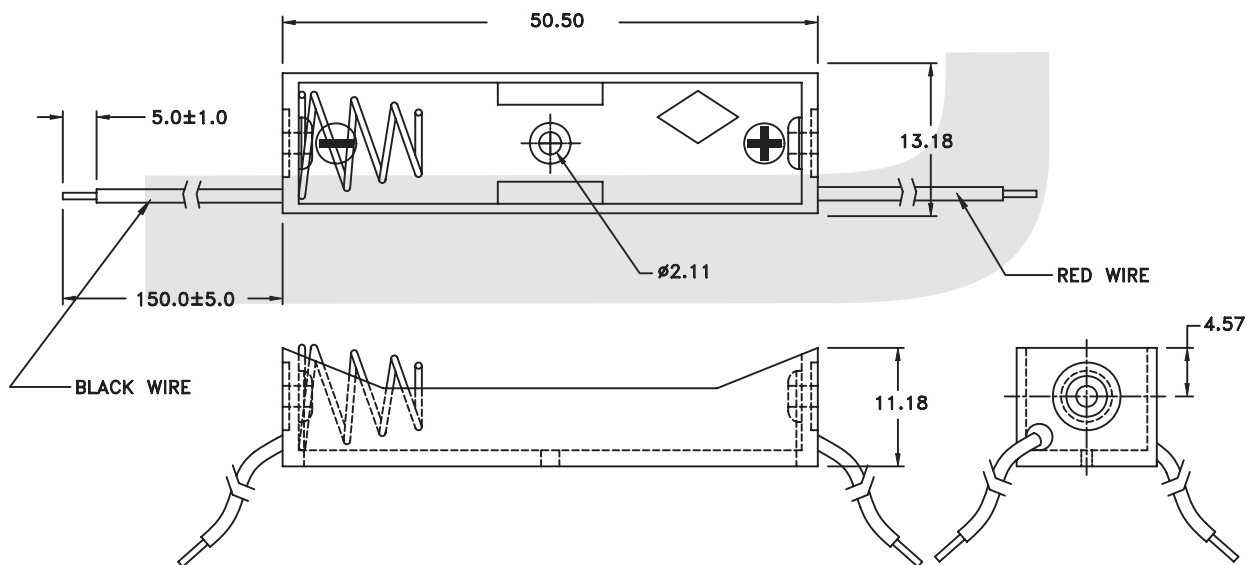

ORDER INFORMATION

Product NO.: **KLS5-817-B**

Part Number
Cell Box Series



TYPE:
A: With Soldered lug
B: With Wire L=15cm or other
D: With Pin

FUSE AND FUSE HOLDER

Cell Box Series

KLS5-817 UM-4 OR "AAA" Cell Box Series

WIRE: UL 1007, # 26 AWG
BLACK & RED: 150 MM $\pm$ 5MM
STRIP & TIN: 5 MM $\pm$ 1MM
MATERIAL: A. B. S. RESIN BLACK COLOR
SPRING: .6 MM 65C SPRING WIRE
DESCR.: FOR ONE "AAA" CELLS

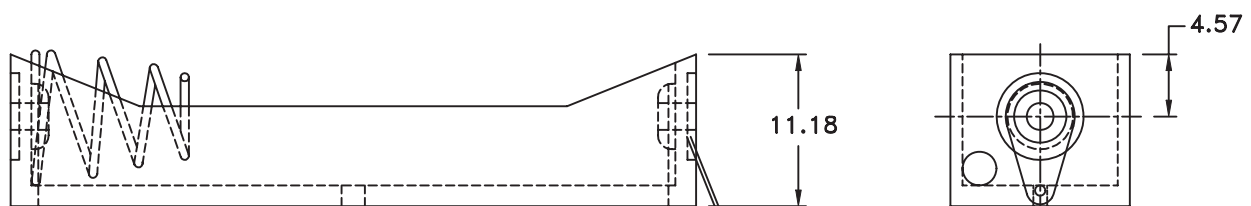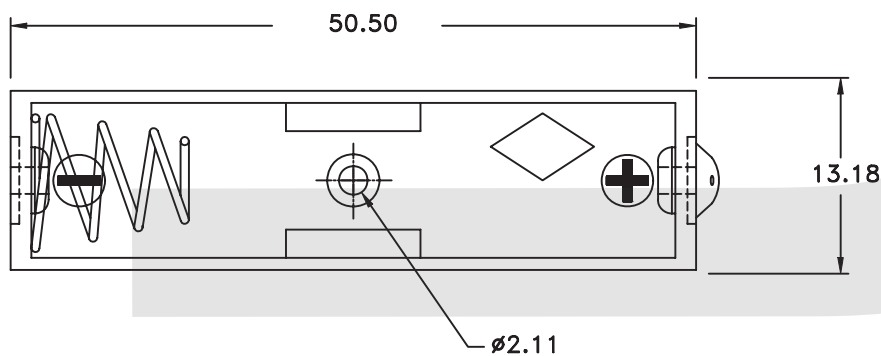


ORDER INFORMATION

Product NO.: **KLS5-817-A**

Part Number
Cell Box Series

TYPE:
A:With Soldered lug
B:With Wire L=15cm or other
D:With Pin

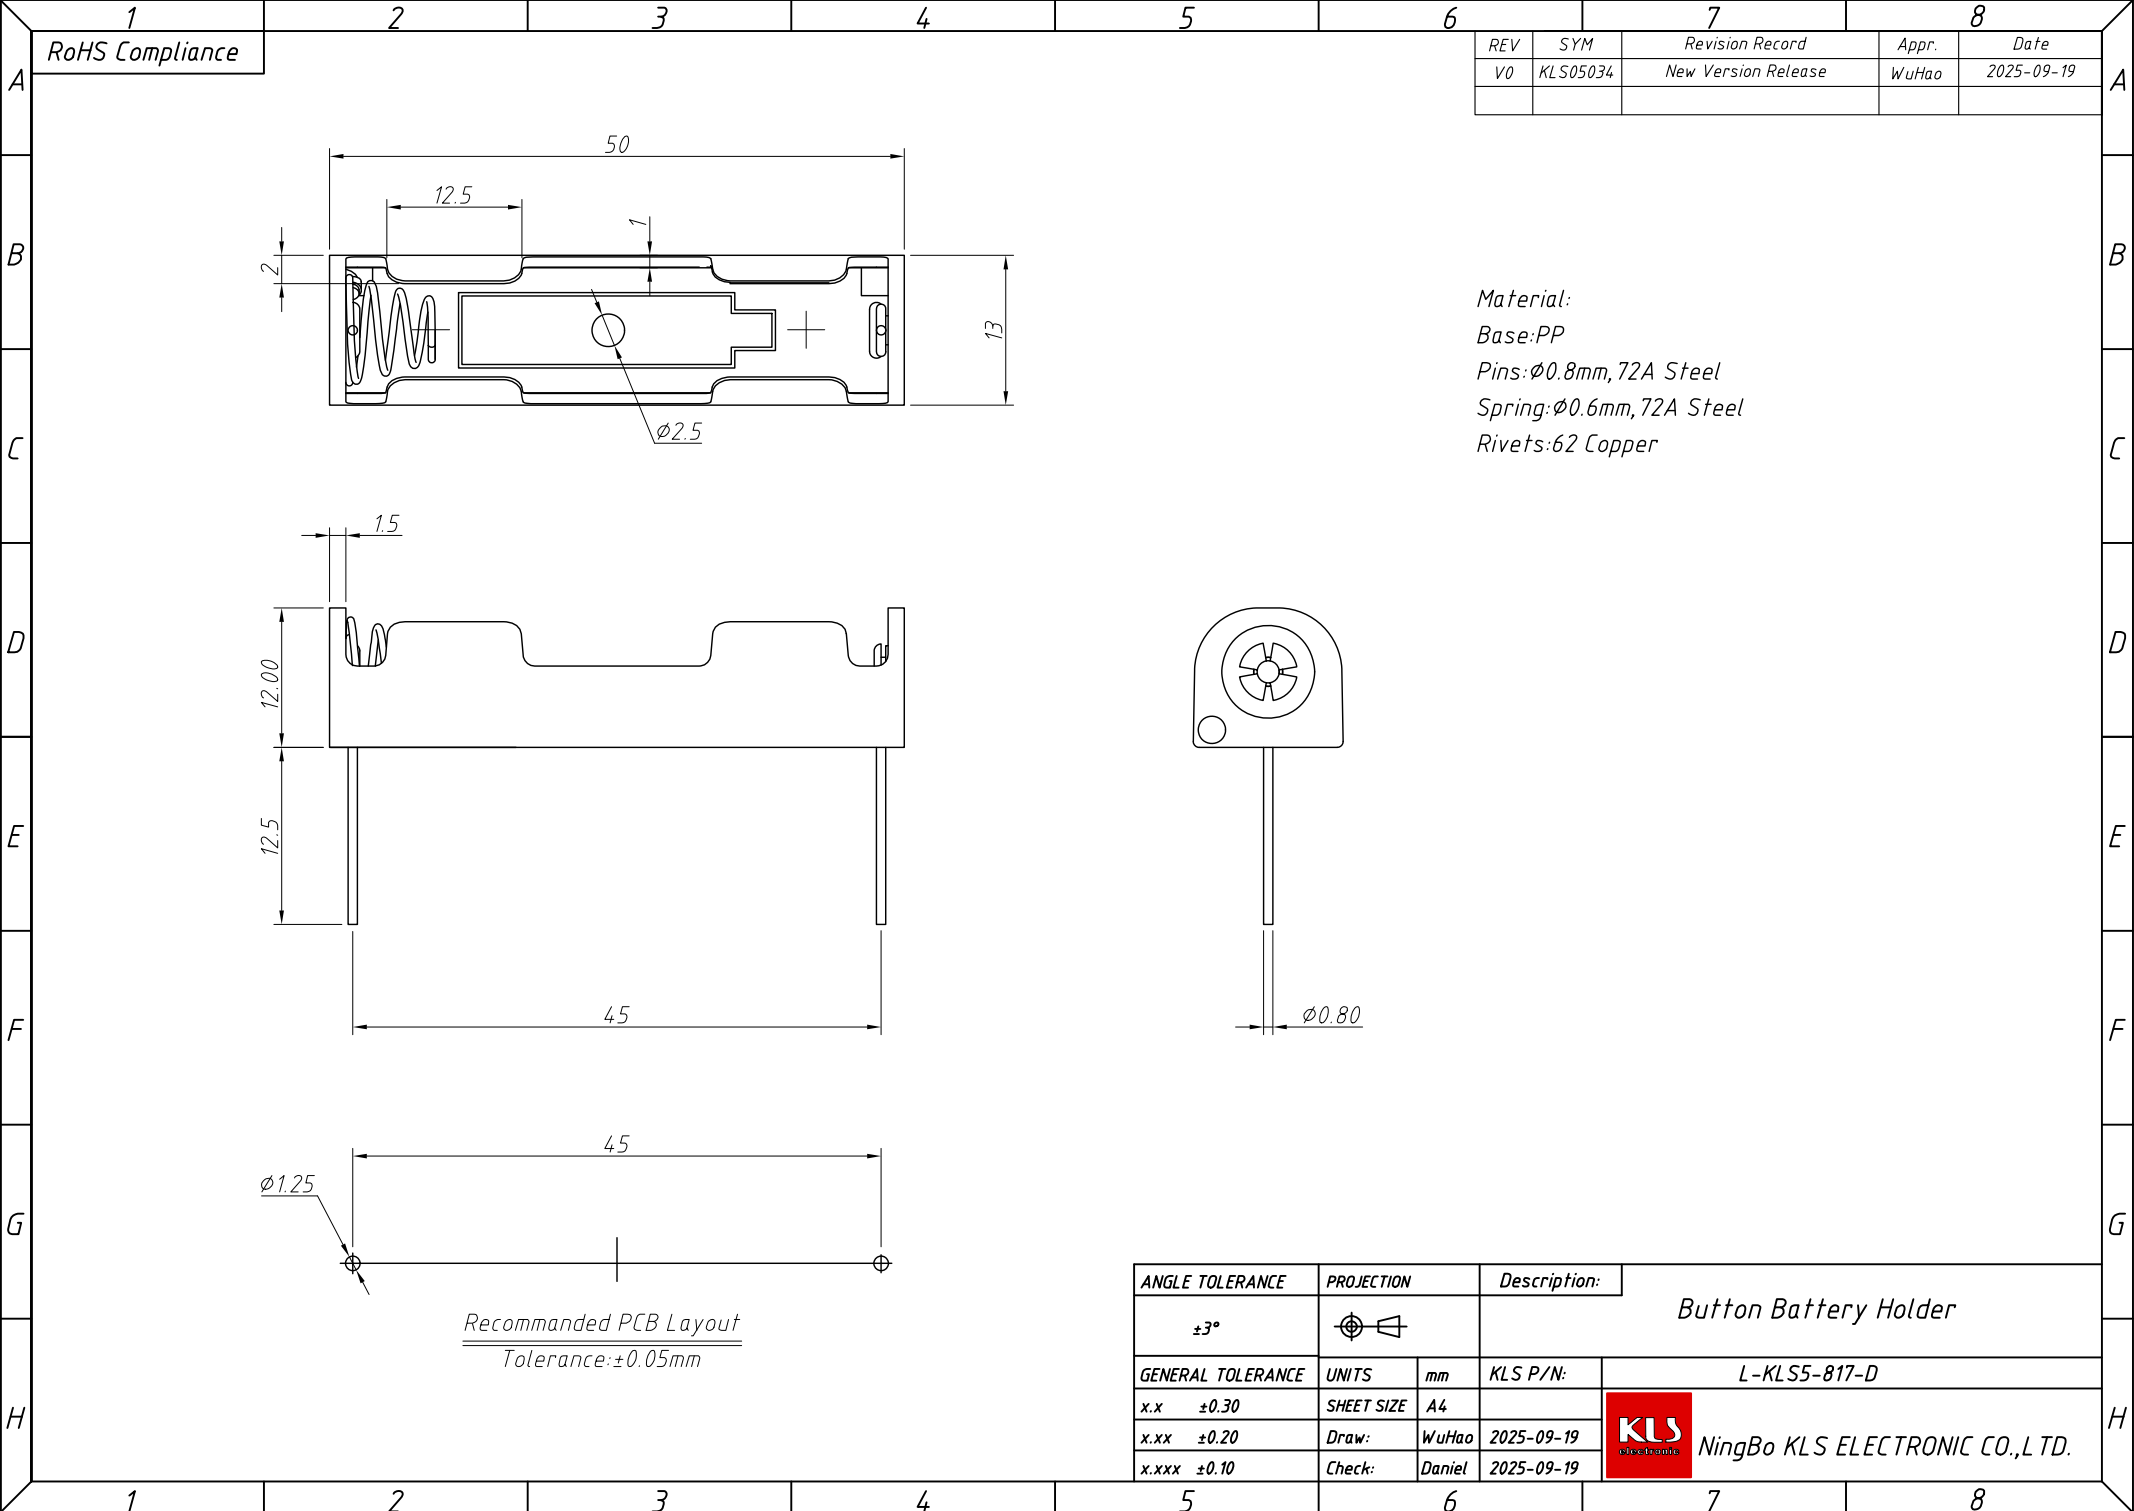

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS05034	New Version Release	WuHao	2025-09-19

Material:
Base:PP
Pins:Ø0.8mm, 72A Steel
Spring:Ø0.6mm, 72A Steel
Rivets:62 Copper

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			Button Battery Holder	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS5-817-D
x.x ±0.30	SHEET SIZE	A4		 NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	WuHao	2025-09-19	
x.xxx ±0.10	Check:	Daniel	2025-09-19	