


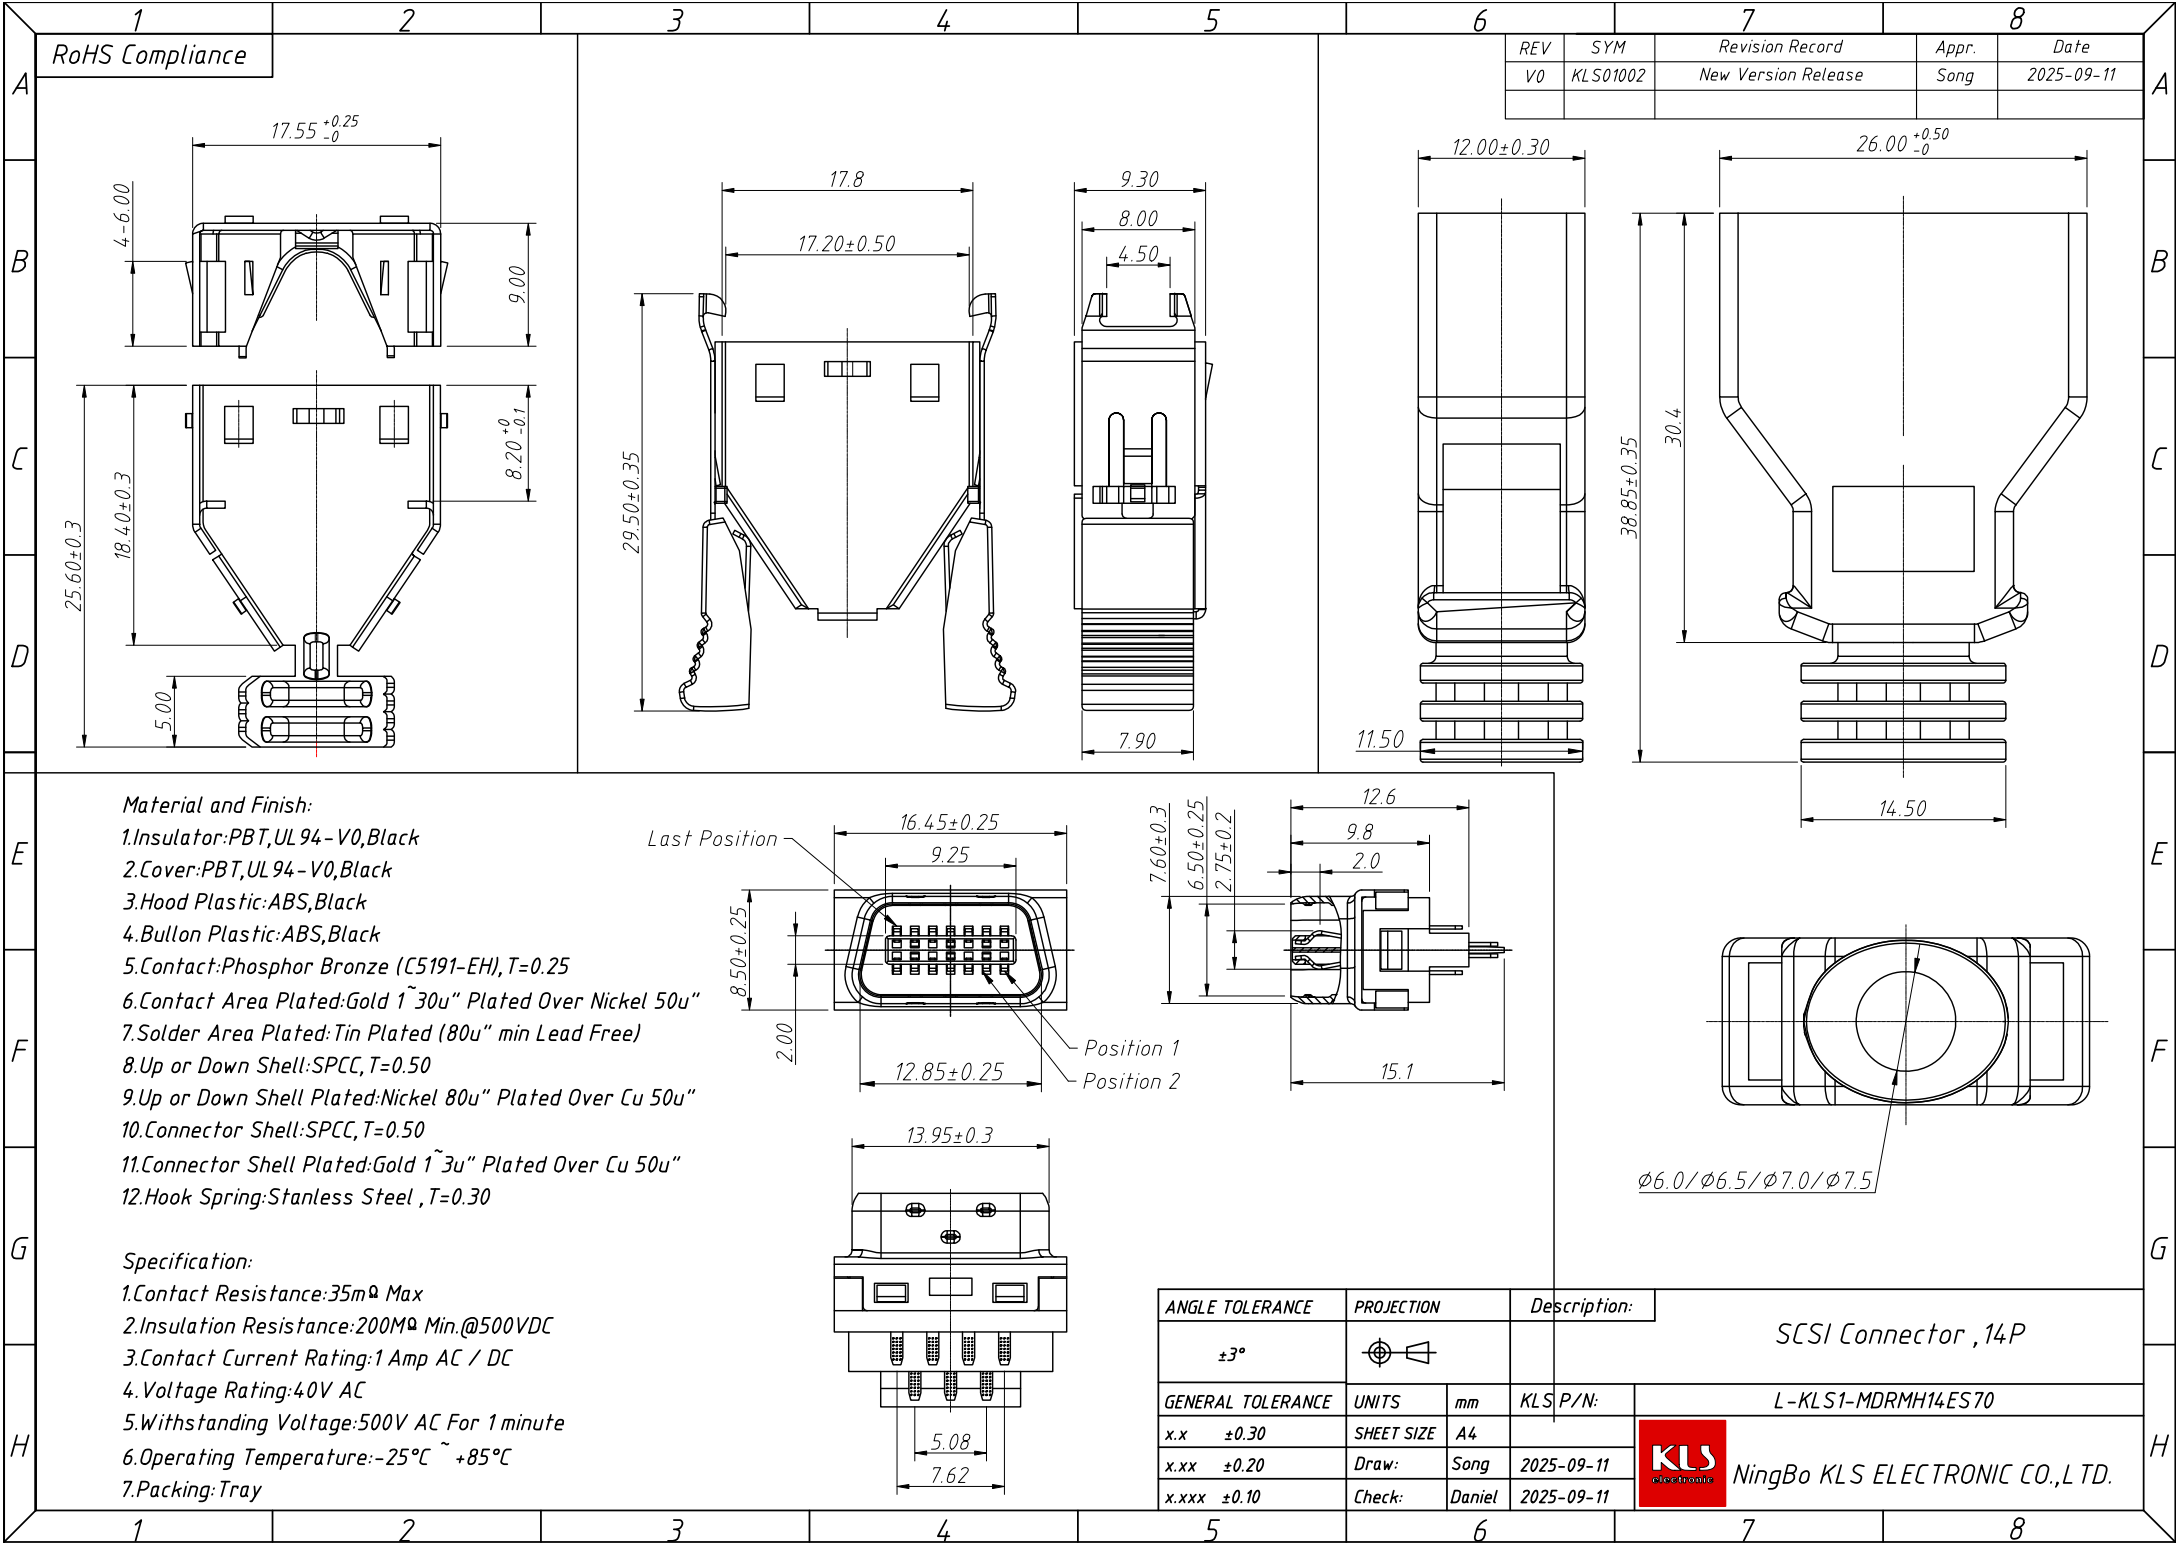

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C





D

E

F

G

H

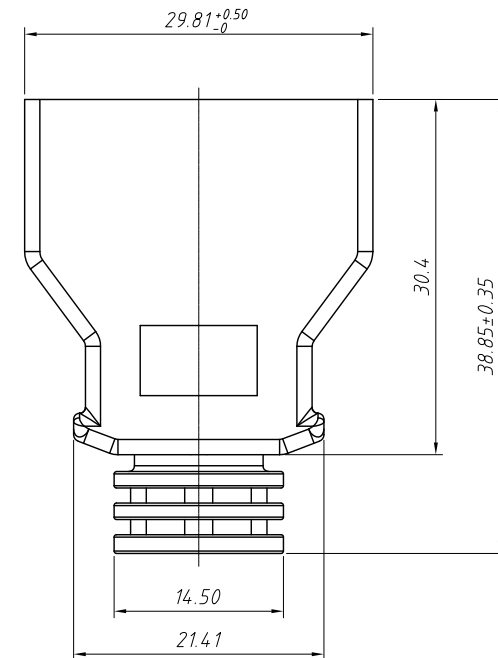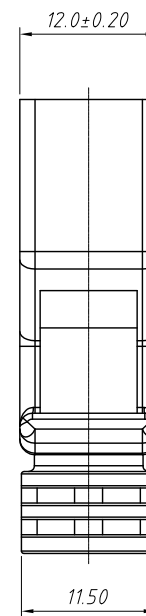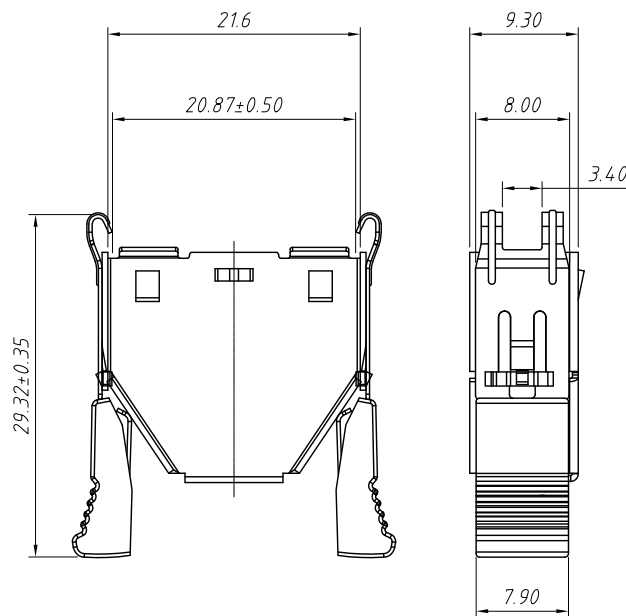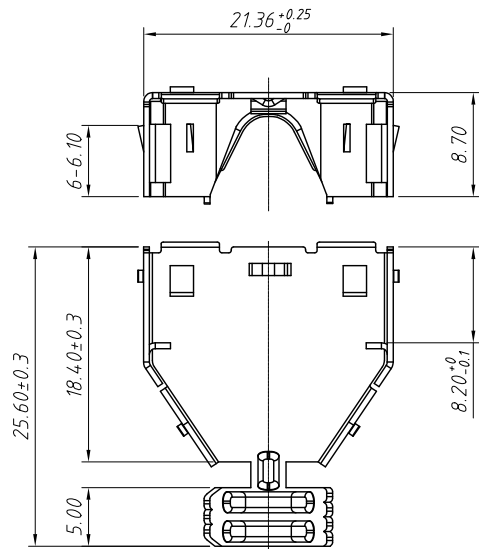

Material and Finish:

1. Insulator: PBT, UL 94-V0, Black
2. Cover: PBT, UL 94-V0, Black/White
3. Hood Plastic: ABS, Black/White
4. Bullon Plastic: ABS, Black/White
5. Contact: Phosphor Bronze (C5191-EH), T=0.25
6. Contact Area Plated: Gold 1~30u" Plated Over Nickel 50u"
7. Solder Area Plated: Tin Plated (80u" min Lead Free)
8. Up or Down Shell: SPCC, T=0.50
9. Up or Down Shell Plated: Nickel 80u" Plated Over Cu 50u"
10. Connector Shell: SPCC, T=0.50
11. Connector Shell Plated: Gold 1~3u" Plated Over Cu 50u"
12. Hook Spring: Stainless Steel, T=0.30





Specification:

1. Contact Resistance: 35mΩ Max.
2. Insulation Resistance: 200MΩ Min. @500VDC
3. Contact Current Rating: 1 Amp AC / DC
4. Voltage Rating: 40V AC
5. Withstanding Voltage: 500V AC For 1 minute
6. Operating Temperature: -25°C ~ +85°C
7. Packing: Tray


Order Information:

L-KLS1-MDRMH20

L: RoHS
SCSI Connector
Serial Number
No. of 20 26 36 50 Pins



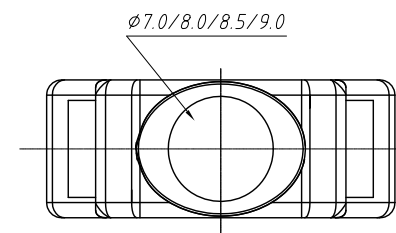

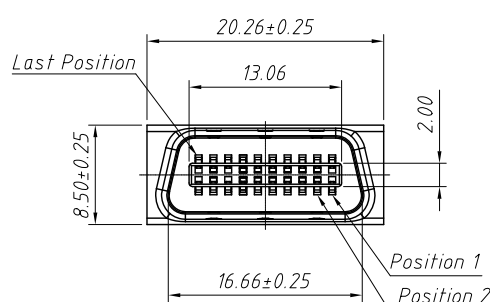


ANGLE TOLERANCE		PROJECTION		Description:	
±3°				SCSI Connector CN Type Male Solder Plastic Hood with Latch Clip	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MDRMH20
x.x	±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,LTD.
x.xx	±0.20	Draw:	Daniel		
x.xxx	±0.10	Check:	Daniel		

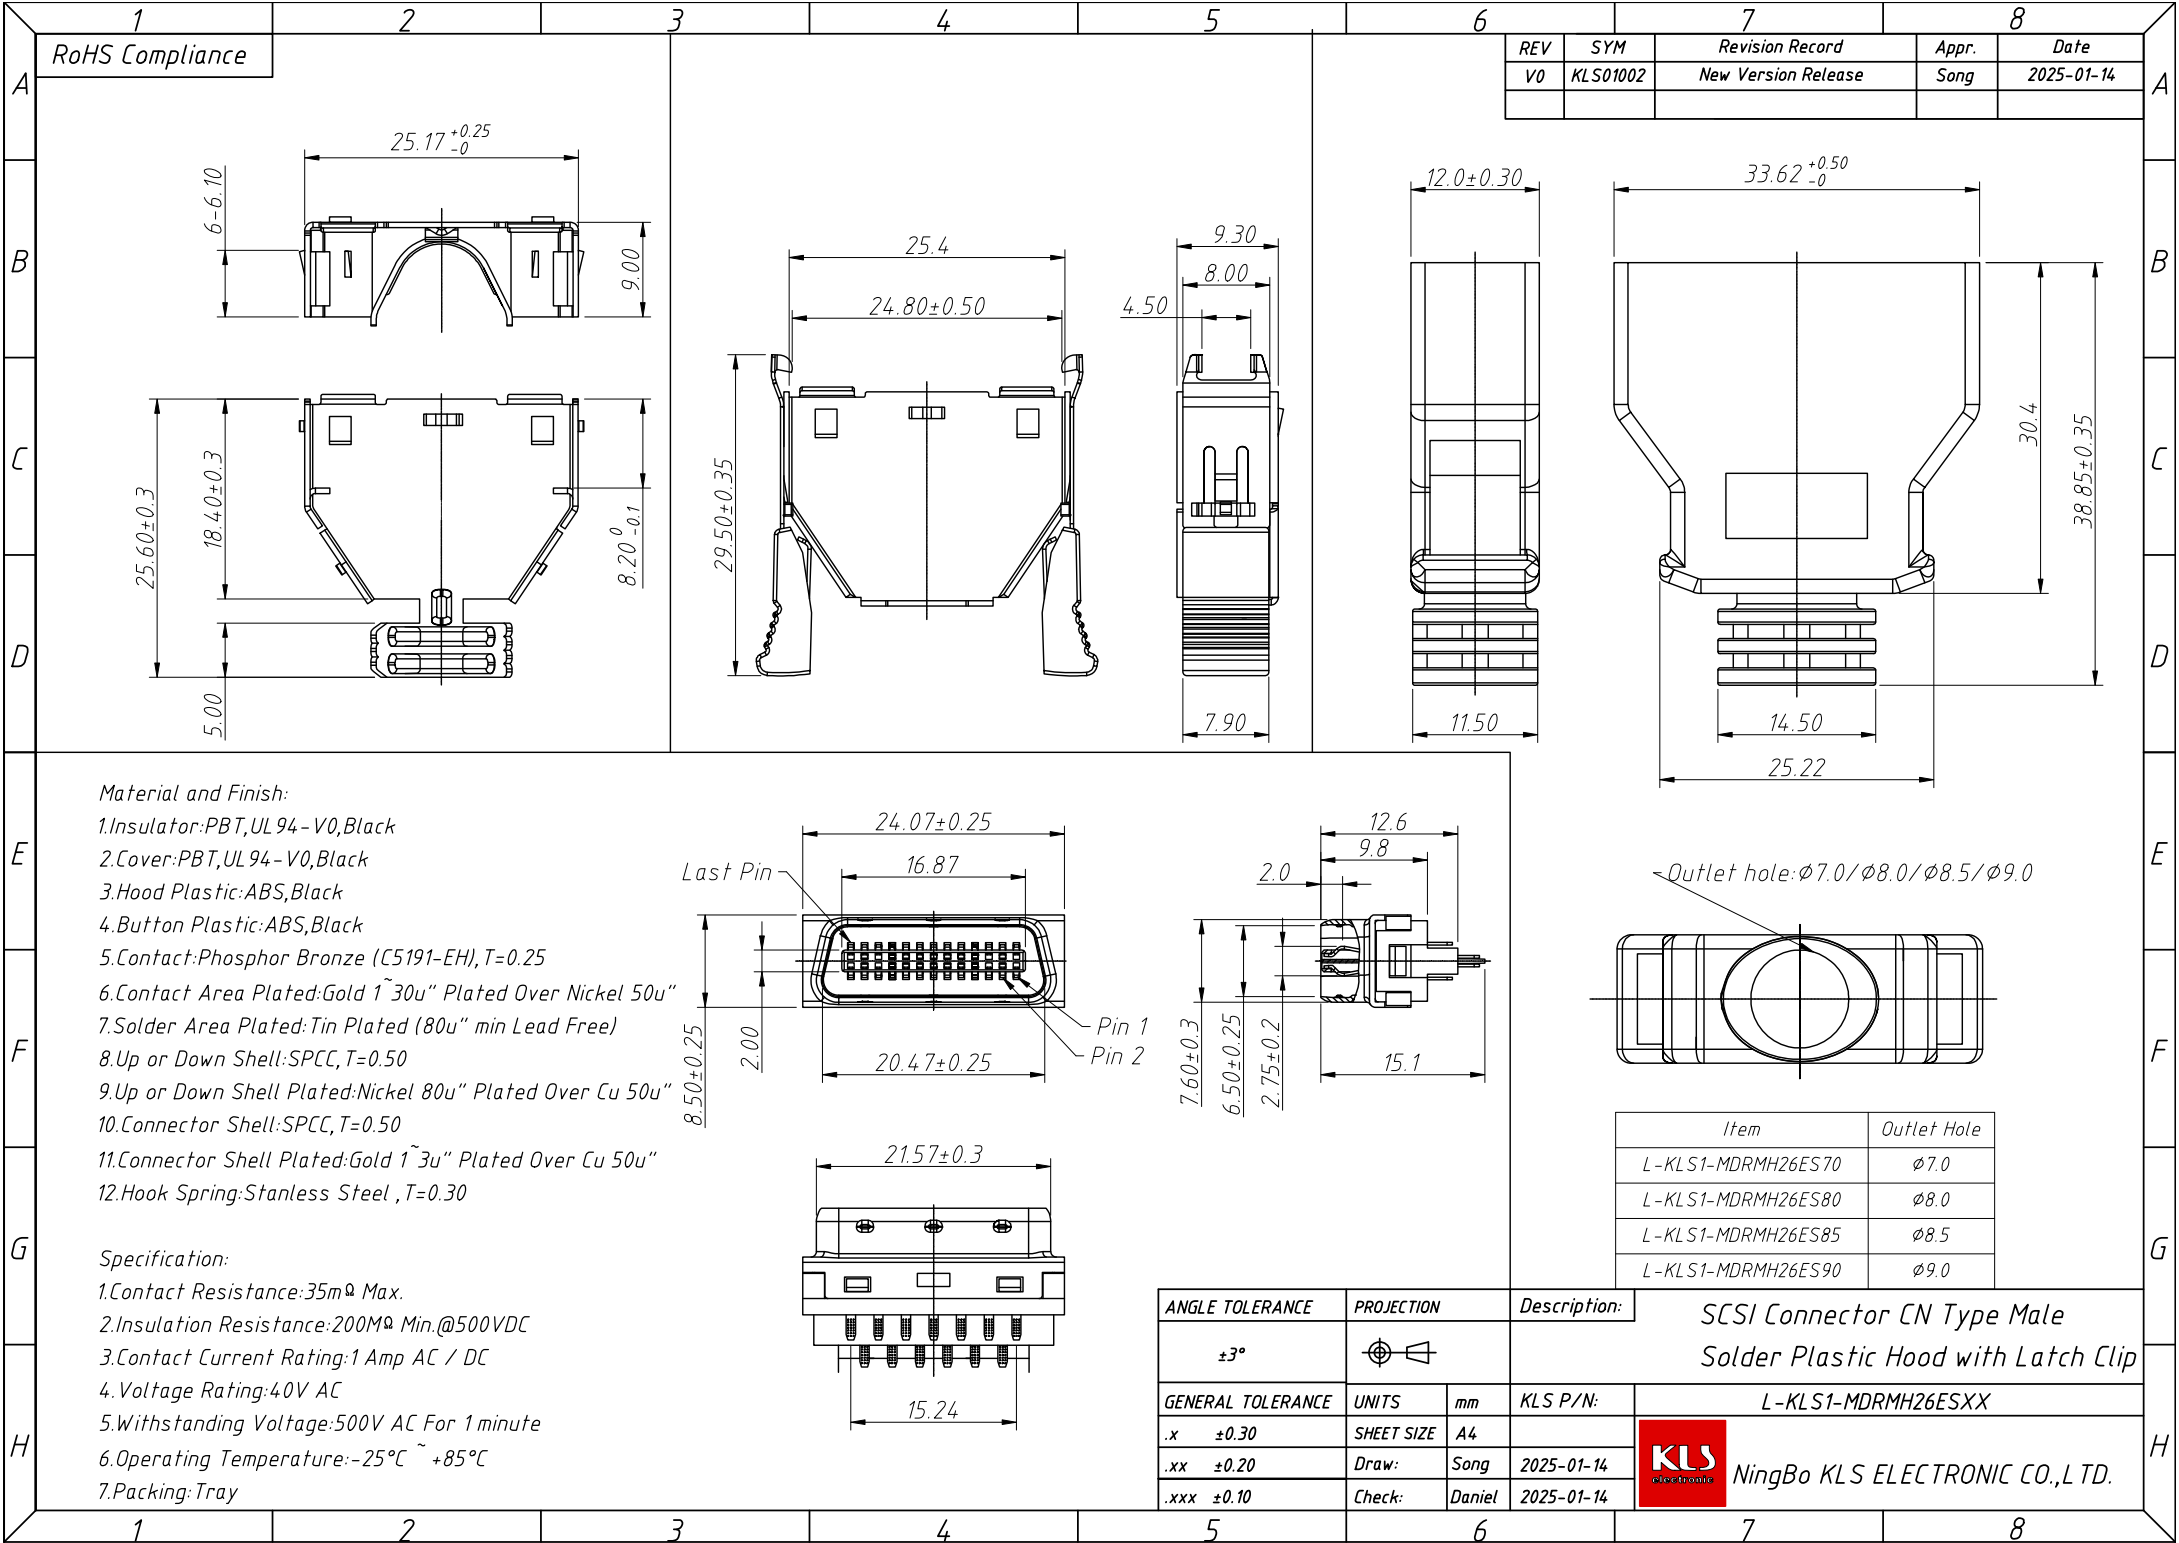




1
RoHS Compliance

REV		SYM	Revision Record		Appr.	Date
V0		KLS01002	New Version Release		Song	2025-01-14

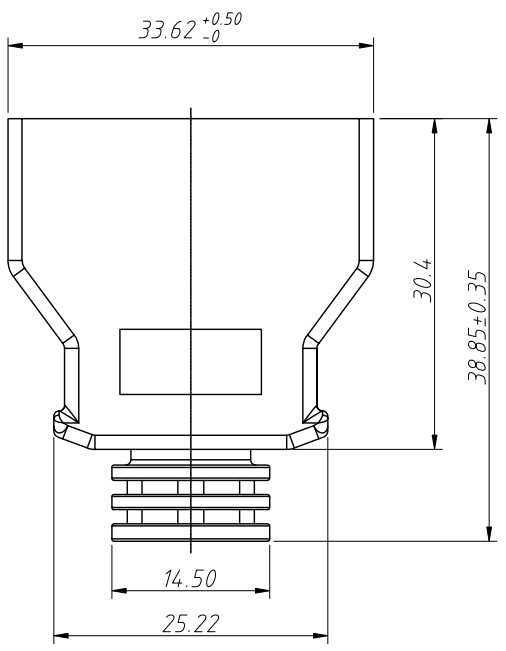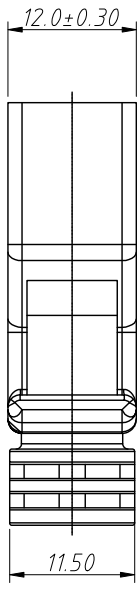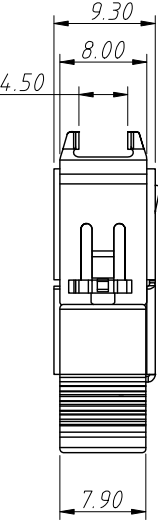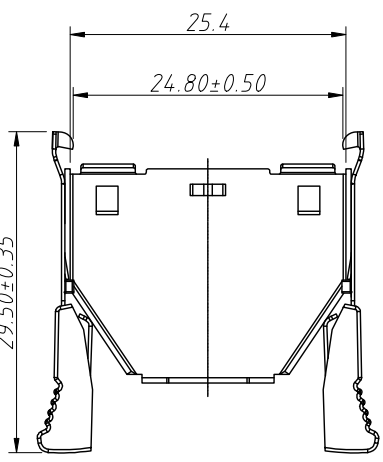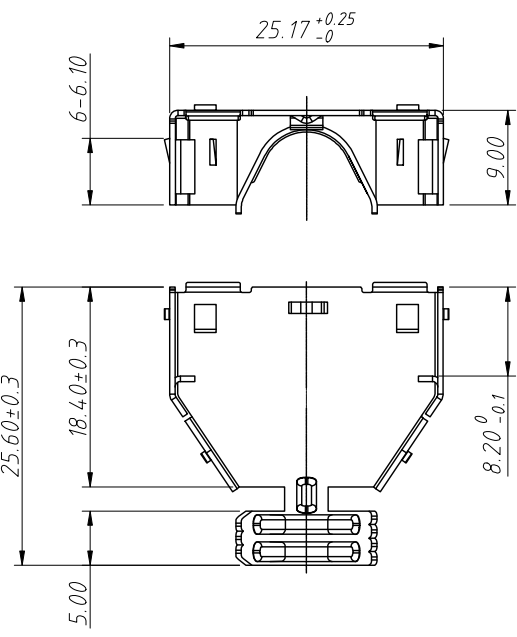

Material and Finish:


- 1.Insulator:PBT,UL 94-V0,Black
- 2.Cover:PBT,UL 94-V0,Black
- 3.Hood Plastic:ABS,Black
- 4.Button Plastic:ABS,Black
- 5.Contact:Phosphor Bronze (C5191-EH),T=0.25
- 6.Contact Area Plated:Gold 1~30u" Plated Over Nickel 50u"
- 7.Solder Area Plated:Tin Plated (80u" min Lead Free)
- 8.Up or Down Shell:SPCC,T=0.50
- 9.Up or Down Shell Plated:Nickel 80u" Plated Over Cu 50u"
- 10.Connector Shell:SPCC,T=0.50
- 11.Connector Shell Plated:Gold 1~3u" Plated Over Cu 50u"
- 12.Hook Spring:Stainless Steel ,T=0.30

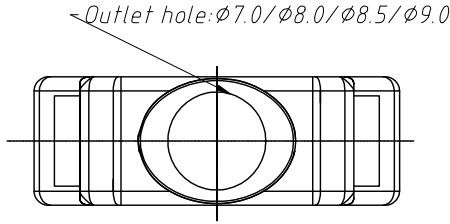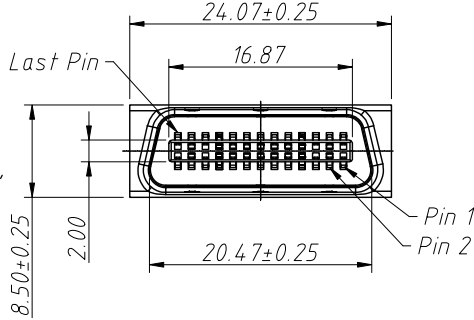


Item	Outlet Hole
L-KLS1-MDRMH26ES70	ø7.0
L-KLS1-MDRMH26ES80	ø8.0
L-KLS1-MDRMH26ES85	ø8.5
L-KLS1-MDRMH26ES90	ø9.0

Specification:






- 1.Contact Resistance:35mΩ Max.
- 2.Insulation Resistance:200MΩ Min.@500VDC
- 3.Contact Current Rating:1 Amp AC / DC
- 4.Voltage Rating:40V AC
- 5.Withstanding Voltage:500V AC For 1 minute
- 6.Operating Temperature:-25℃ ~ +85℃
- 7.Packing: Tray



ANGLE TOLERANCE		PROJECTION		Description:		
±3°				SCSI Connector CN Type Male		
GENERAL TOLERANCE		UNITS	mm	Solder Plastic Hood with Latch Clip		
.x	±0.30	SHEET SIZE	A4	L-KLS1-MDRMH26ESXX		
.xx	±0.20	Draw:	Song	2025-01-14	NingBo KLS ELECTRONIC CO.,L TD.	
.xxx	±0.10	Check:	Daniel	2025-01-14		

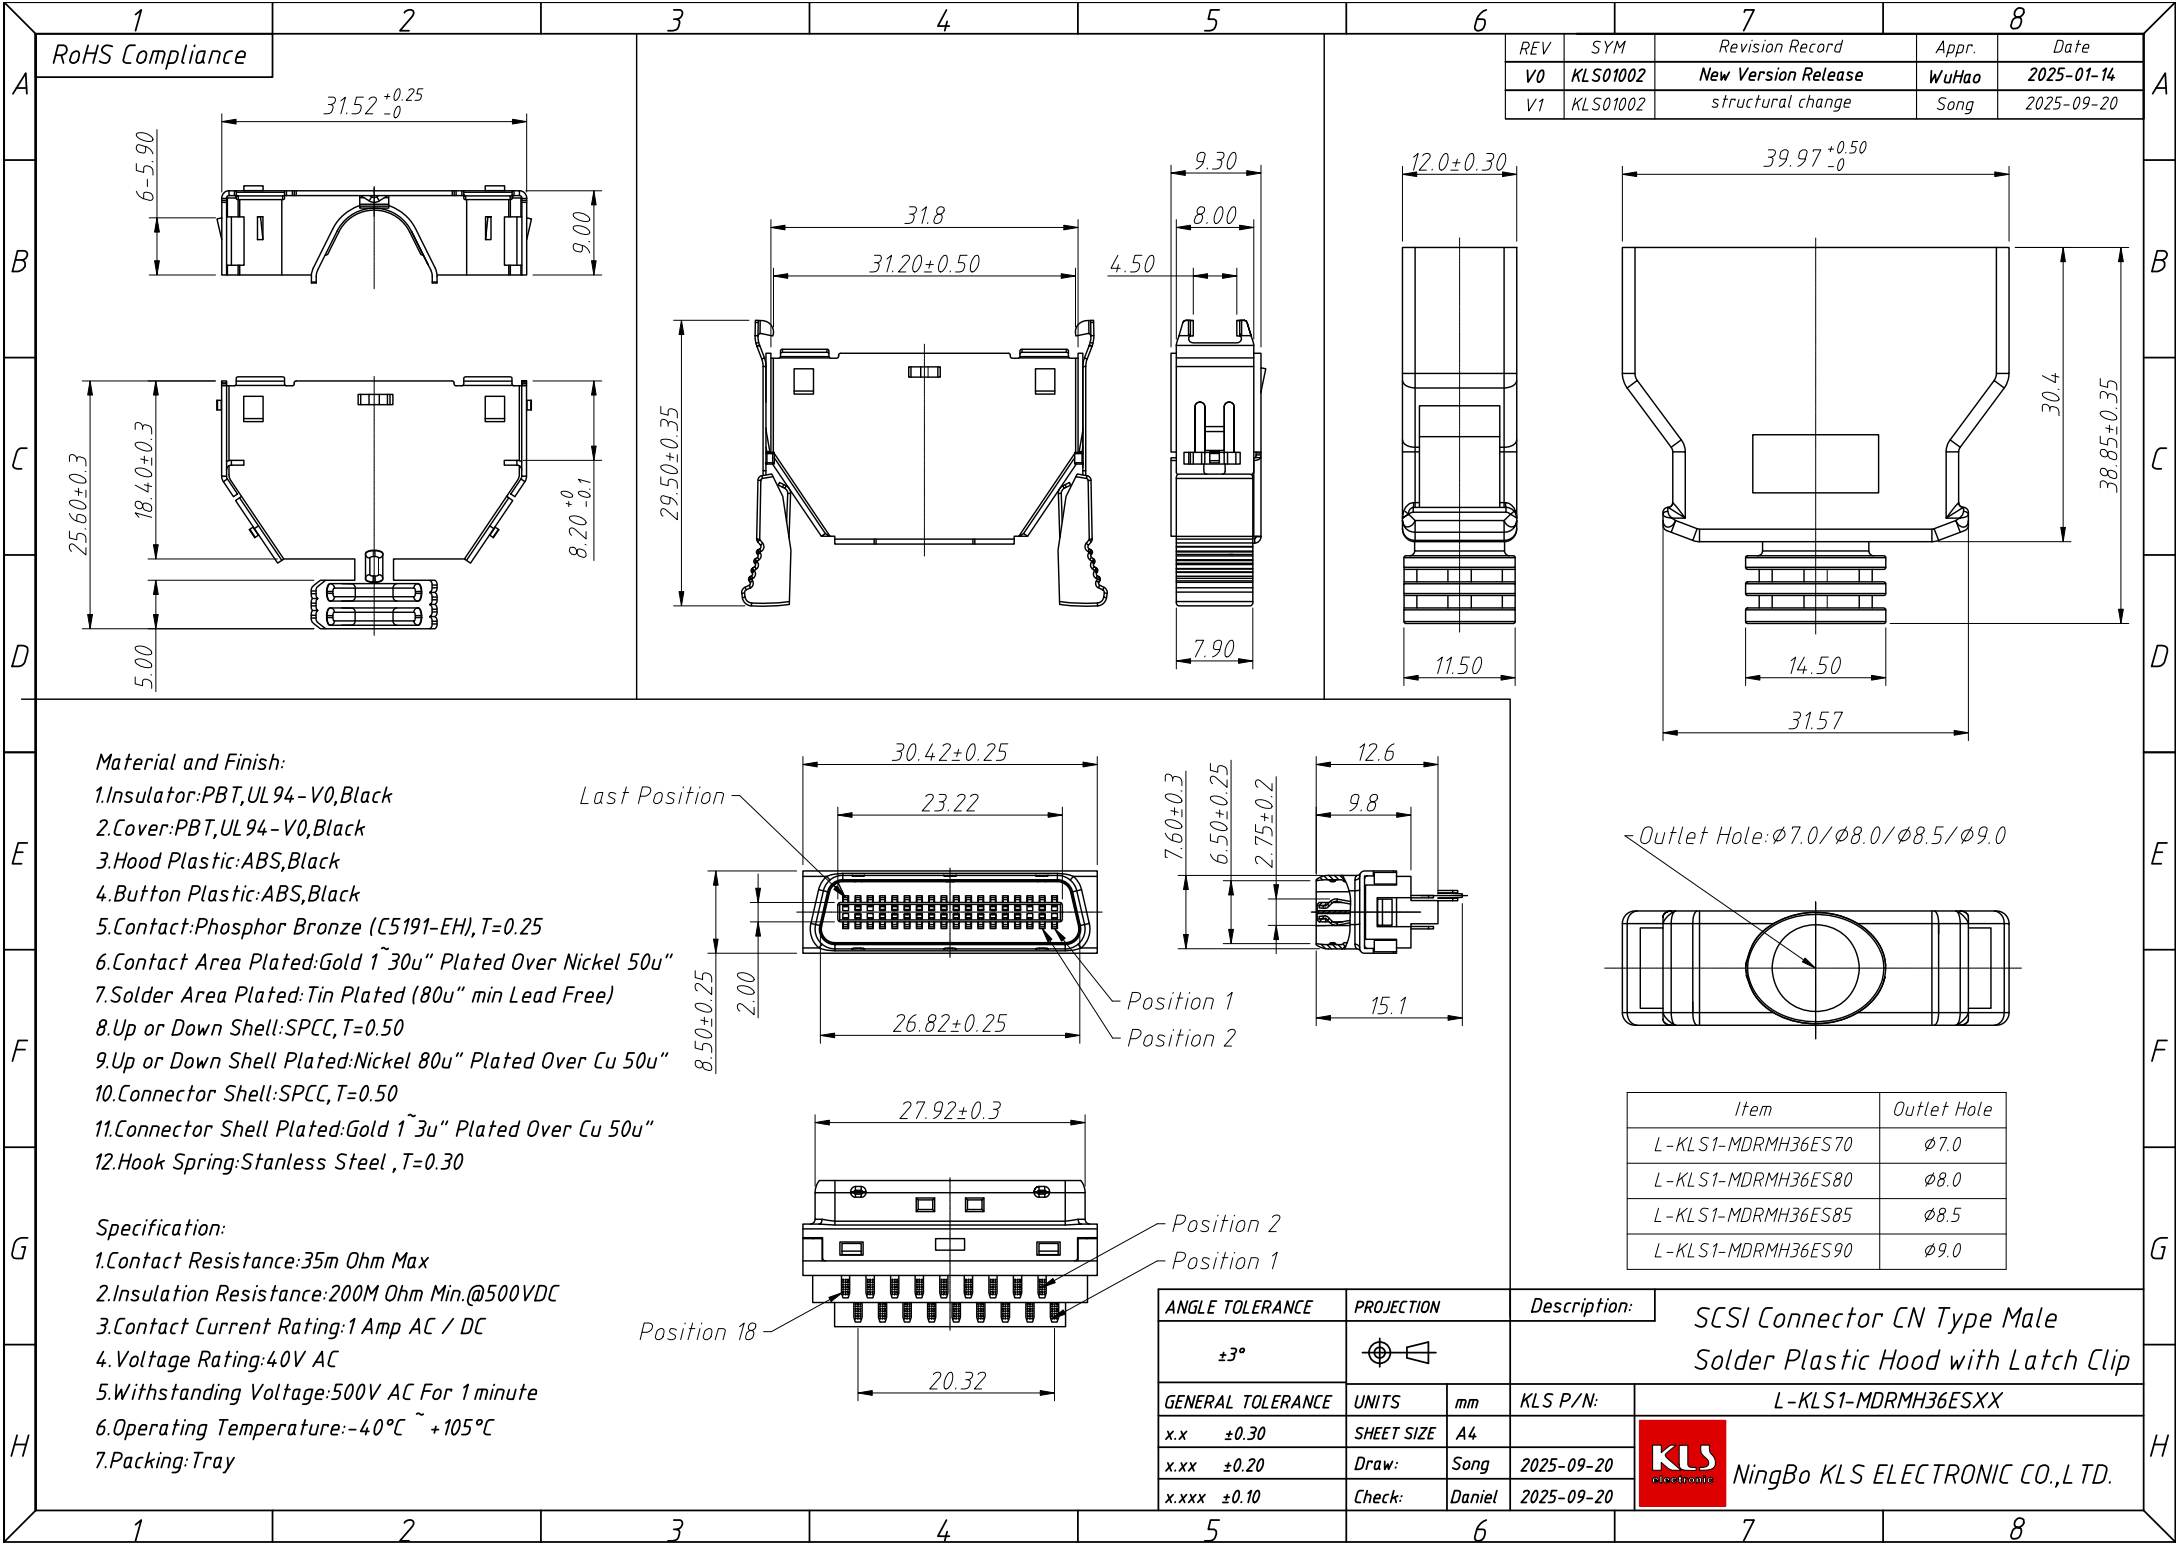

RoHS Compliance

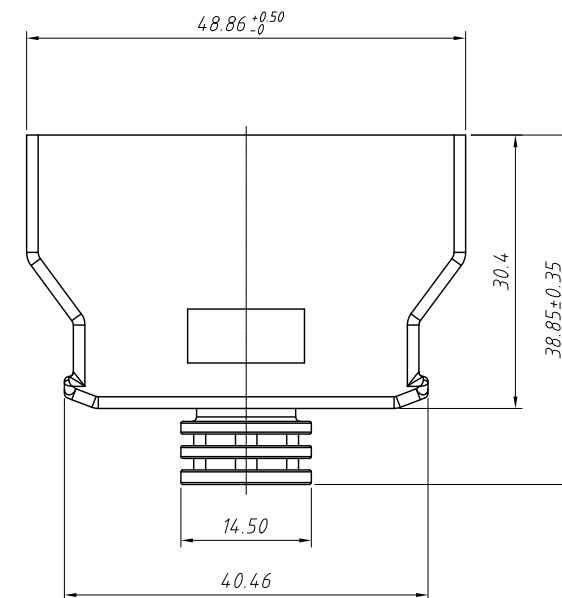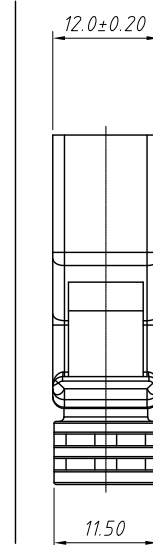
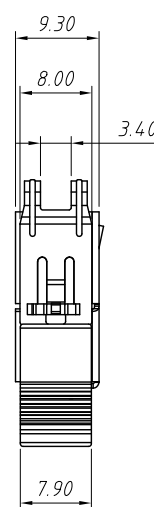
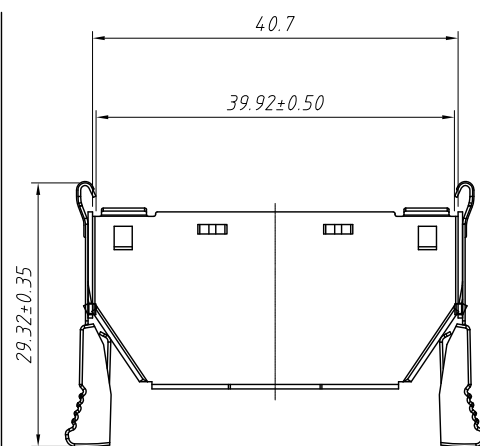
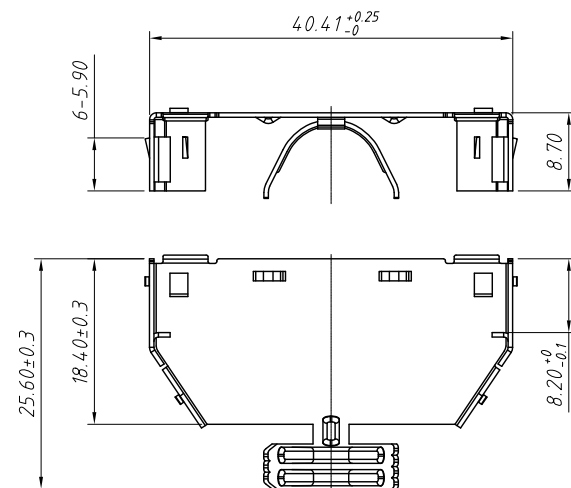


Material and Finish:

1. Insulator: PBT, UL 94-V0, Black
2. Cover: PBT, UL 94-V0, Black/White
3. Hood Plastic: ABS, Black/White
4. Bullon Plastic: ABS, Black/White
5. Contact: Phosphor Bronze (C5191-EH), T=0.25
6. Contact Area Plated: Gold 1~30u" Plated Over Nickel 50u"
7. Solder Area Plated: Tin Plated (80u" min Lead Free)
8. Up or Down Shell: SPCC, T=0.50
9. Up or Down Shell Plated: Nickel 80u" Plated Over Cu 50u"
10. Connector Shell: SPCC, T=0.50
11. Connector Shell Plated: Gold 1~3u" Plated Over Cu 50u"
12. Hook Spring: Stainless Steel, T=0.30

Specification:

1. Contact Resistance: 35mΩ Max.
2. Insulation Resistance: 200MΩ Min. @500VDC
3. Contact Current Rating: 1 Amp AC / DC
4. Voltage Rating: 40V AC
5. Withstanding Voltage: 500V AC For 1 minute
6. Operating Temperature: -25°C ~ +85°C
7. Packing: Tray

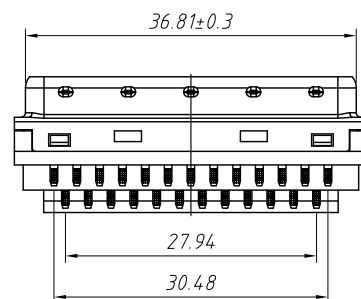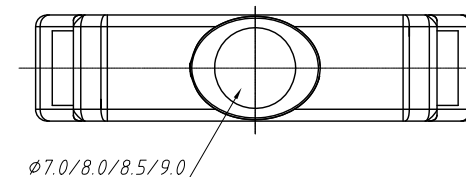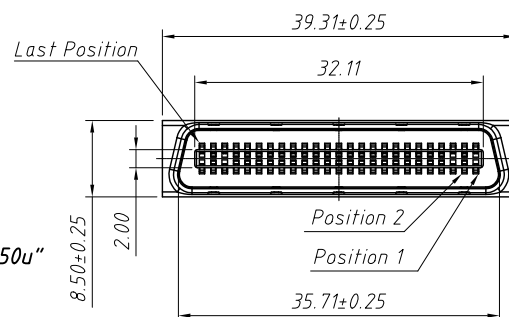

Order Information:

L-KLS1-MDRMH50

L: RoHS

SCSI Connector

Serial Number

No. of 20 26 36 50 Pins

ANGLE TOLERANCE	PROJECTION	Description:	SCSI Connector CN Type Male Solder Plastic Hood with Latch Clip	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-MDRMH50
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2021-10-11	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ±0.10	Check:	Daniel	2021-10-11	