

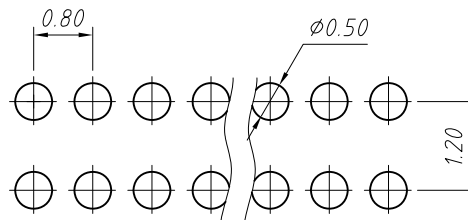
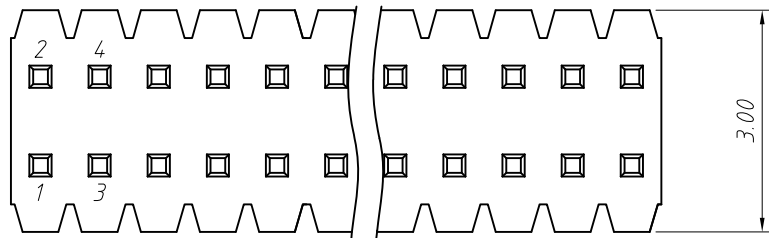


RoHS Compliance

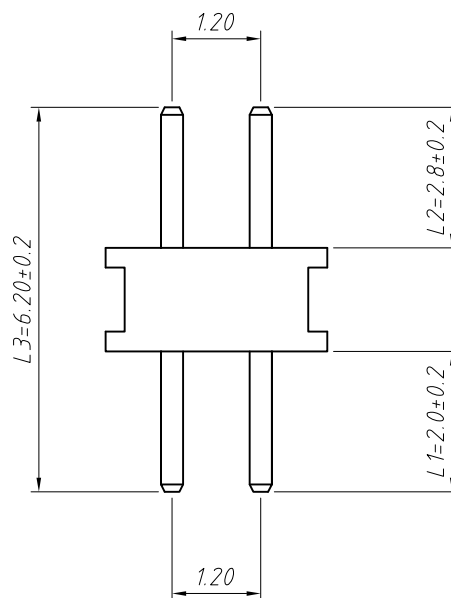

Recommended P.C.B Hole Layout

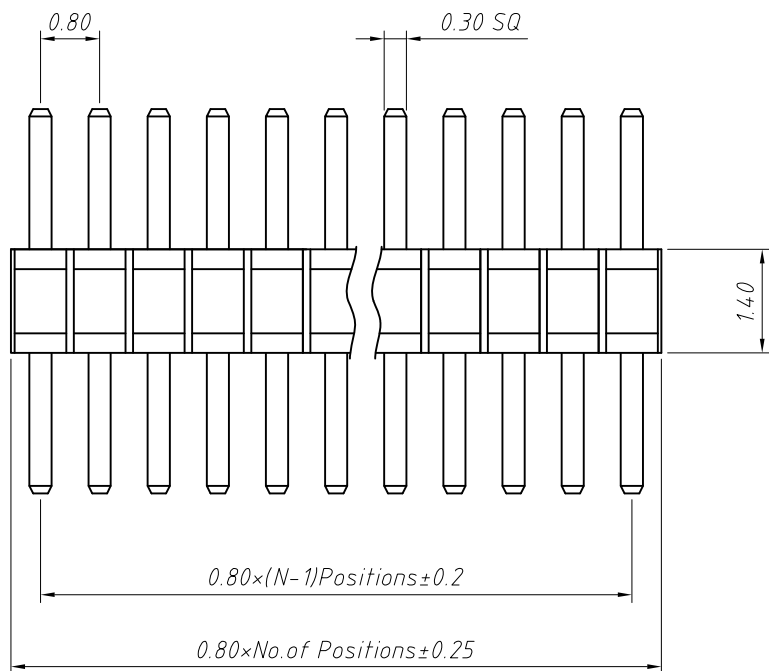

Material:
Standard:LCP
Contact: Brass

Electrical Characteristics:
Rated Current: 0.75AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical
Operating Temperature: -40°C ~ +105°C

Order Information:
L-KLS1-207S-2-XX-S-L1xL2xL3-G0

L: RoHS
Pin Header Series
207S: 0.80mm
Per Row: Dual Row
Pin: No. of Pins (02~100)
Type: Straight Pin
Size: L1xL2xL3
Plating:

G0=Gold Flash G1=1u" Gold
G10=10u" Gold G15=15u" Gold
G30=30u" Gold

Dimension antitheses list (mm)



ITEM	L1	L2	L3	Plastic Height
Standard	2.00	2.80	6.20	1.40
Nonstandard	---	---	---	---

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		0.80mm Pin Header Dual Row, Straight Pin, 2xN Pin	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-207S-2-XX-S-L1xL2xL3-G0
x.xx ±0.20	Draw:	Daniel	2018-07-10
x.xxx ±0.10	Check:	Daniel	2018-07-10





NingBo KLS ELECTRONIC CO.,L TD.

RoHS Compliance

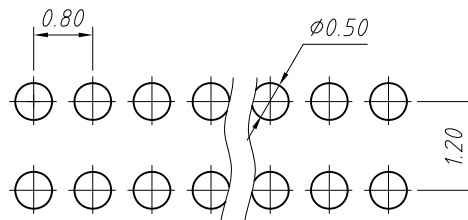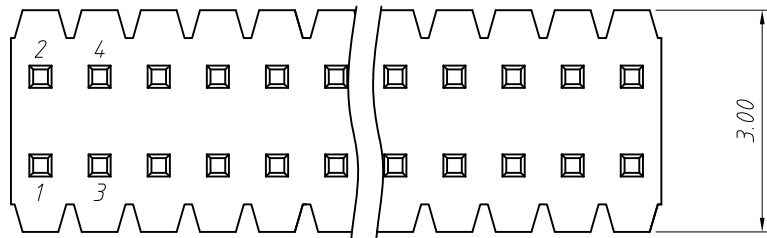

Recommended P.C.B Hole Layout

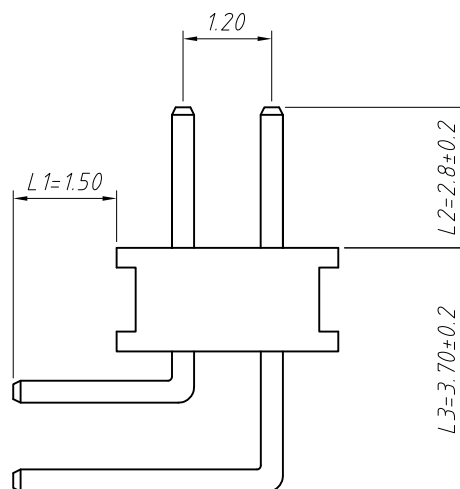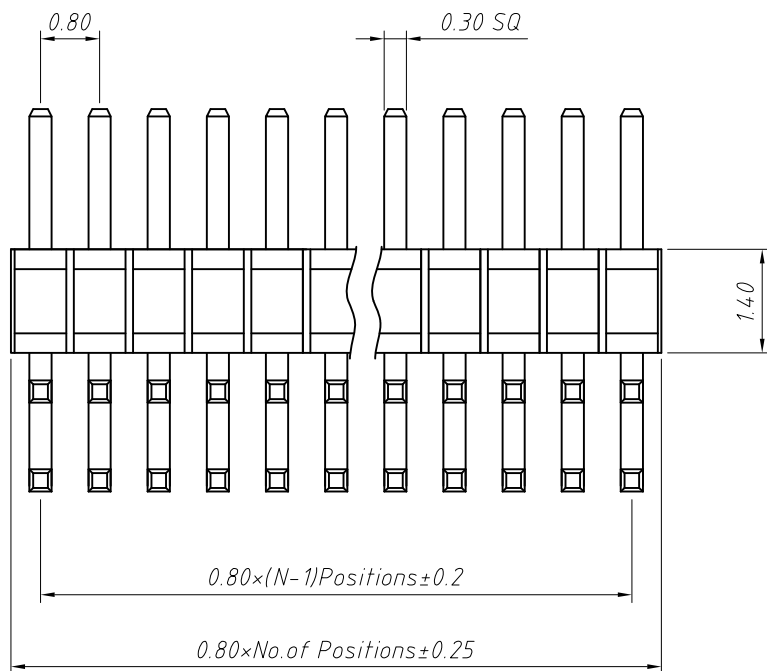

Material:
Standard:LCP
Contact: Brass

Electrical Characteristics:
Rated Current: 0.75AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical
Operating Temperature: -40°C ~ +105°C

Order Information:

L-KLS1-207S-2-XX-R-L1xL2xL3-G0

L: RoHS
Pin Header Series
207S: 0.80mm
Per Row: Dual Row
Pin: No. of Pins (02~100)
Type: Right Angle Pin
Size: L1xL2xL3
Plating:
G0=Gold Flash G1=1u" Gold
G10=10u" Gold G15=15u" Gold
G30=30u" Gold

Dimension antitheses list (mm)



ITEM	L1	L2	L3	Plastic Height
Standard	1.50	2.80	3.70	1.40
Nonstandard	---	---	---	---

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		0.80mm Pin Header Dual Row, Right Angle Pin, 2xN Pin	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-207S-2-XX-R-L1xL2xL3-G0
x.xx ±0.20	Draw:	Daniel	2018-07-10
x.xxx ±0.10	Check:	Daniel	2018-07-10



NingBo KLS ELECTRONIC CO.,L TD.

RoHS Compliance

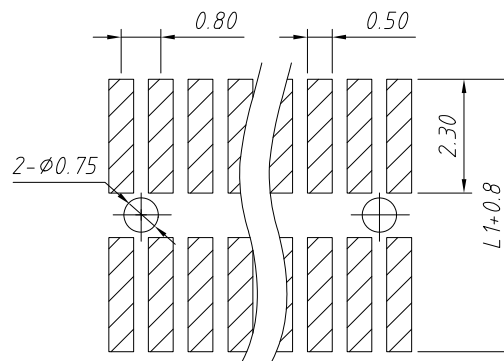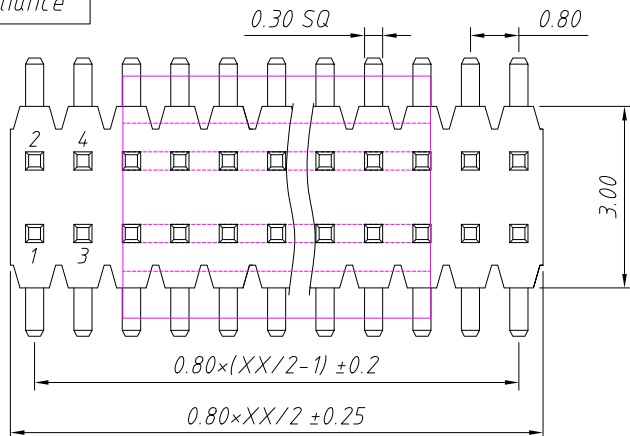


Recommended P.C.B Hole Layout

Material:
Standard: PA6T
Contact: Brass

Electrical Characteristics:
Rated Current: 0.75AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical
Operating Temperature: -40°C ~ +105°C
Max. Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

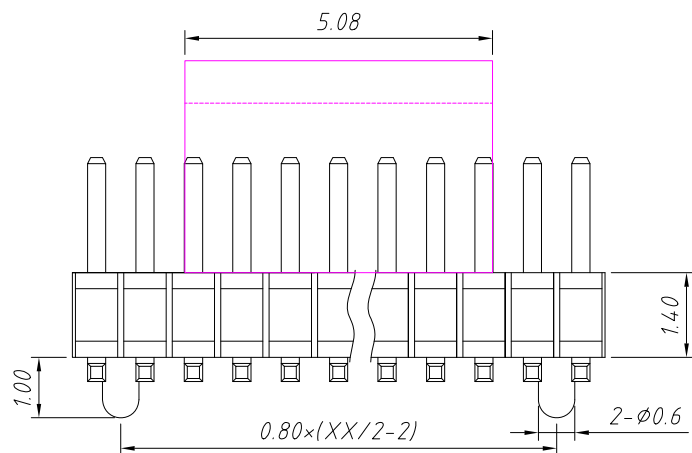


Dimension antitheses list (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	4.60	2.80	1.80	1.40
Nonstandard	---	---	---	---


Order Information

L-KLS1-207S-2-XX-T-L1xL2xL3-G0-R

RoHS
Pin Header Series
207S: 0.80mm
Per Row: Double layer
Pin: No. of Pins
SMT: T=Without Post
T3=With Post
Size: L1xL2xL3
Plating: G0=Gold Flash G1=1u"Gold
G10=10u"Gold G15=15u"Gold G30=30u"Gold
Sn=Tin Gold
Packing: 0=PE Bag P=Tube+Cap A=Tray
T=Tube R=Reel+Cap M=Reel+Mylar

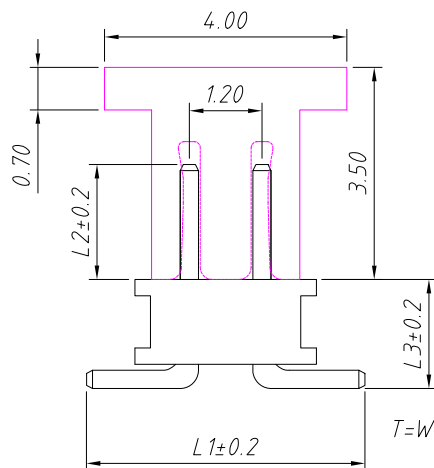

T=Without Post

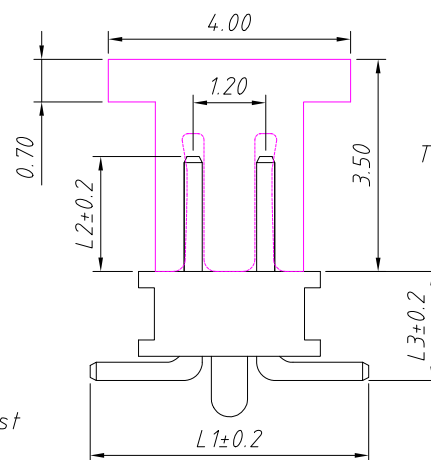

T3=With Post

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		0.80mm Pin Header Double layer, SMT Pin, 2xN Pin		
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-207S-2-XX-X-L1xL2xL3-XX-X
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2018-07-10	
x.xxx ±0.10	Check:	Daniel	2018-07-10	



NingBo KLS ELECTRONIC CO.,LTD.