



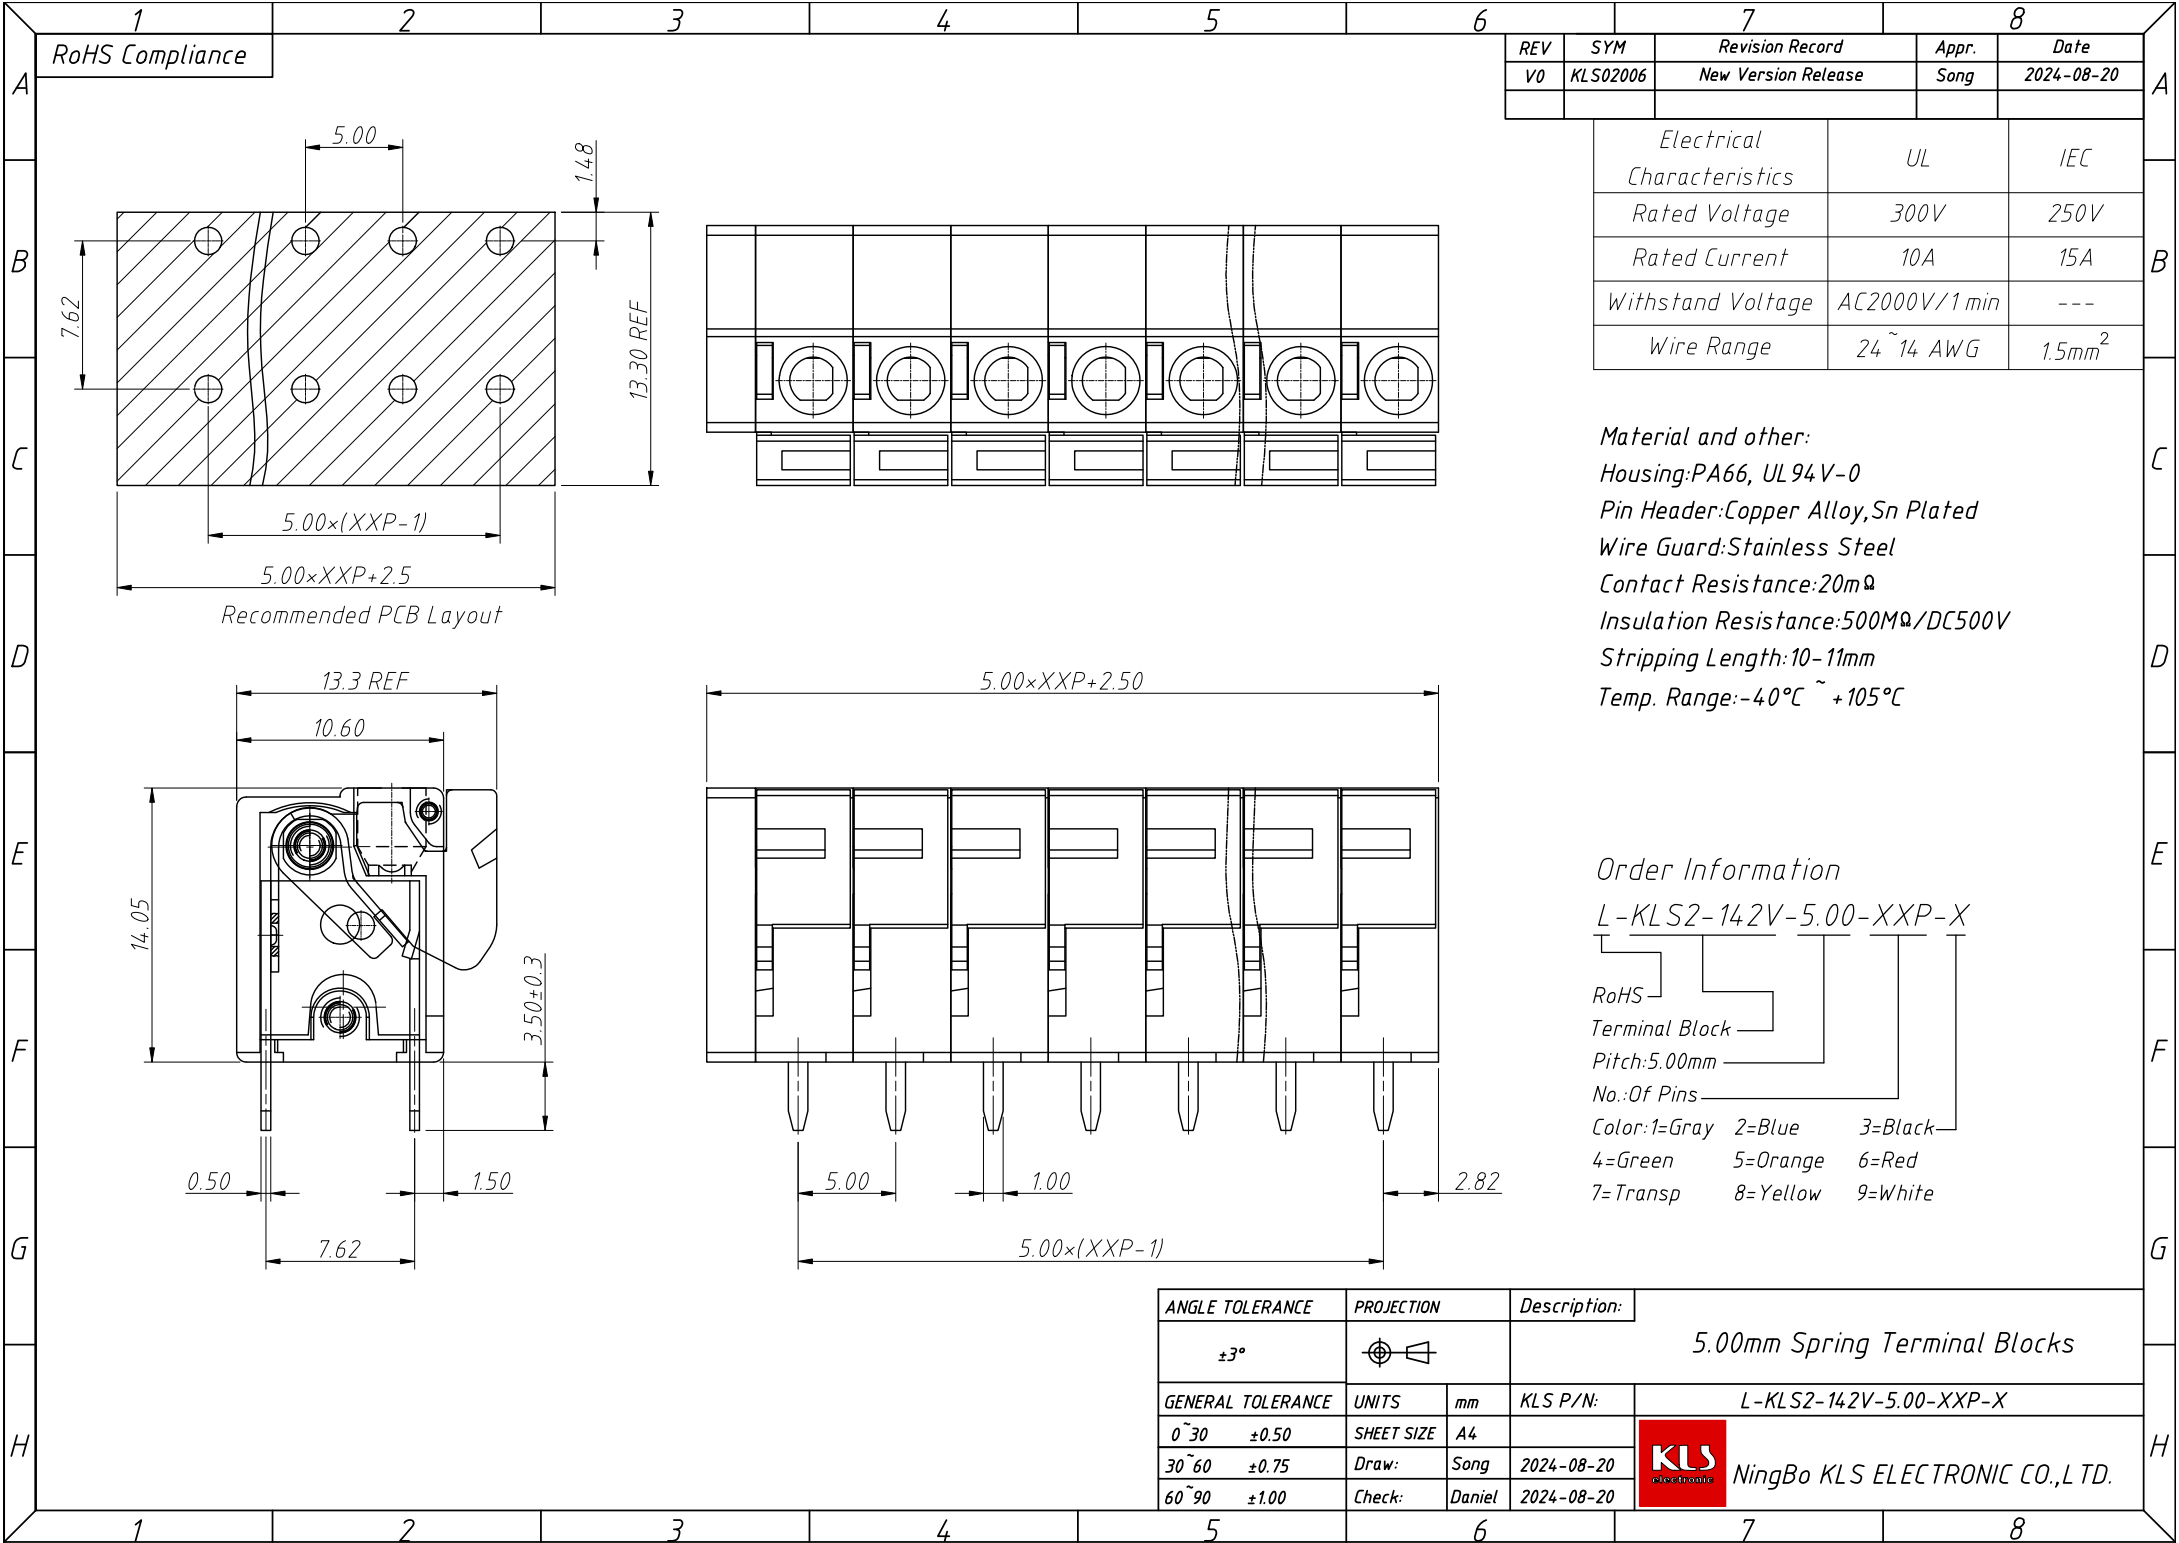

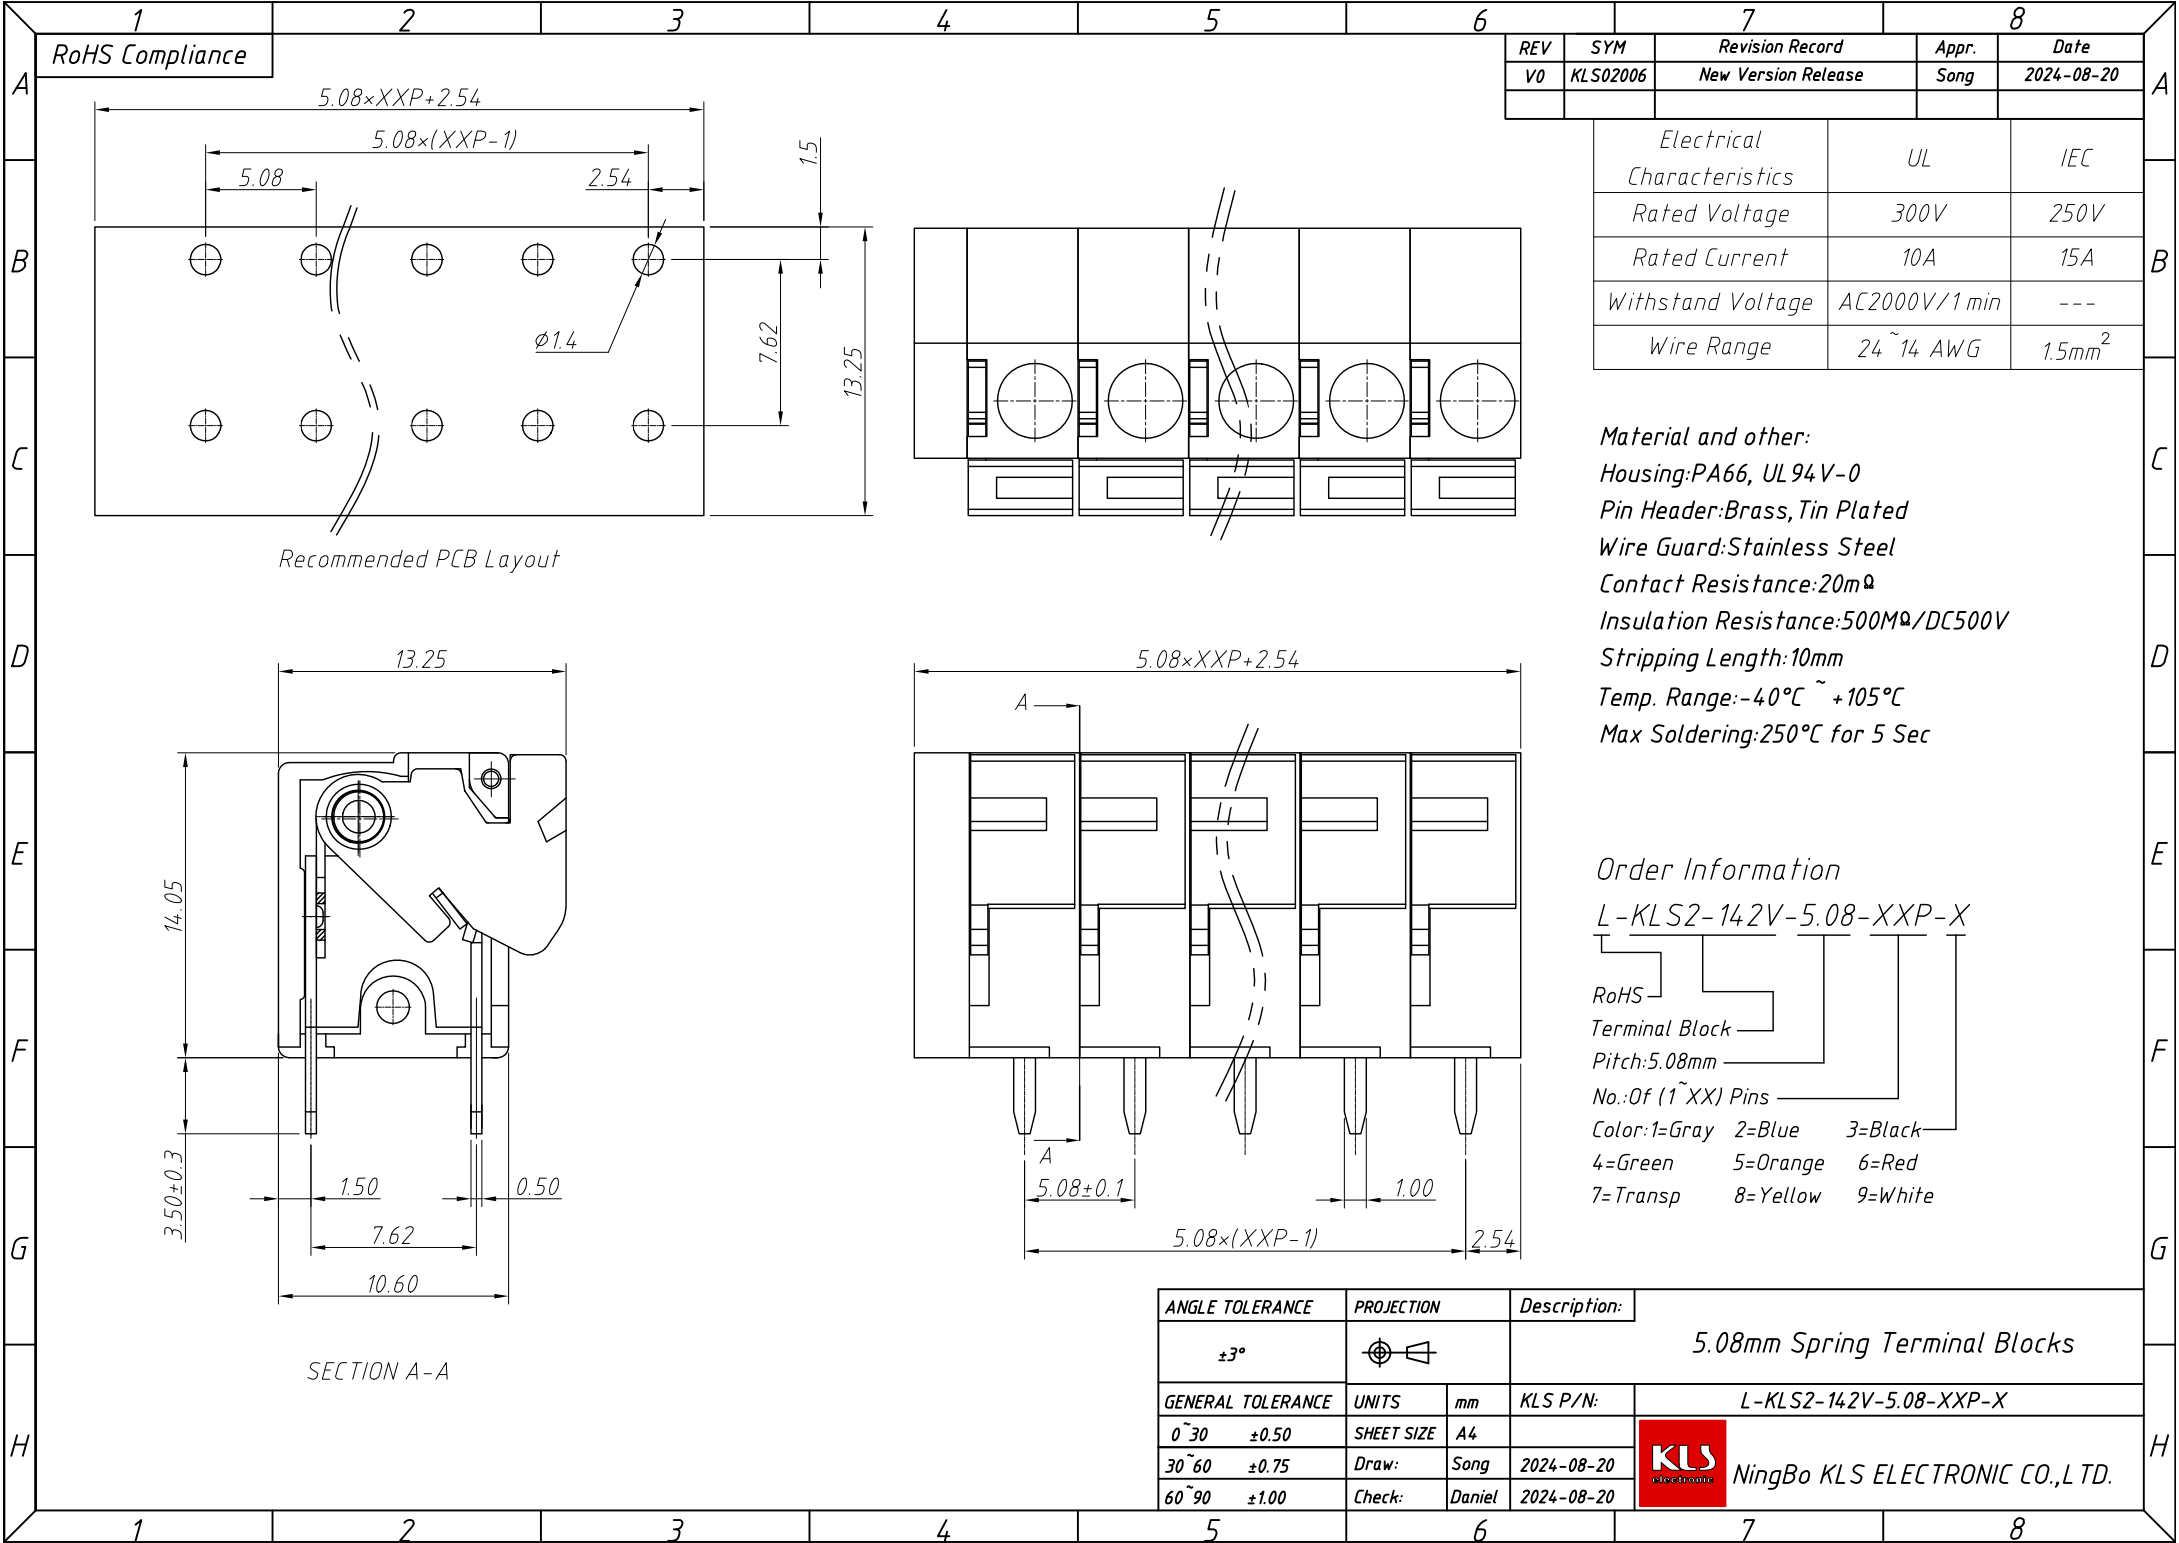

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Song	2024-08-20

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	10A	15A
Withstand Voltage	AC2000V/1 min	---
Wire Range	24 ~ 14 AWG	1.5mm ²

Material and other:
Housing:PA66, UL 94V-0
Pin Header:Brass,Tin Plated
Wire Guard:Stainless Steel
Contact Resistance:20mΩ
Insulation Resistance:500MΩ/DC500V
Stripping Length:10mm
Temp. Range:-40°C ~ +105°C
Max Soldering:250°C for 5 Sec

Order Information
L-KLS2-142V-5.08-XXP-X
RoHS
Terminal Block
Pitch:5.08mm
No.:Of (1~XX) Pins
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

ANGLE TOLERANCE	PROJECTION	Description:
±3°		5.08mm Spring Terminal Blocks
GENERAL TOLERANCE	UNITS	mm
0~30	±0.50	SHEET SIZE
30~60	±0.75	Draw:
60~90	±1.00	Check:
		KLS P/N:
		L-KLS2-142V-5.08-XXP-X
		NingBo KLS ELECTRONIC CO.,LTD.