


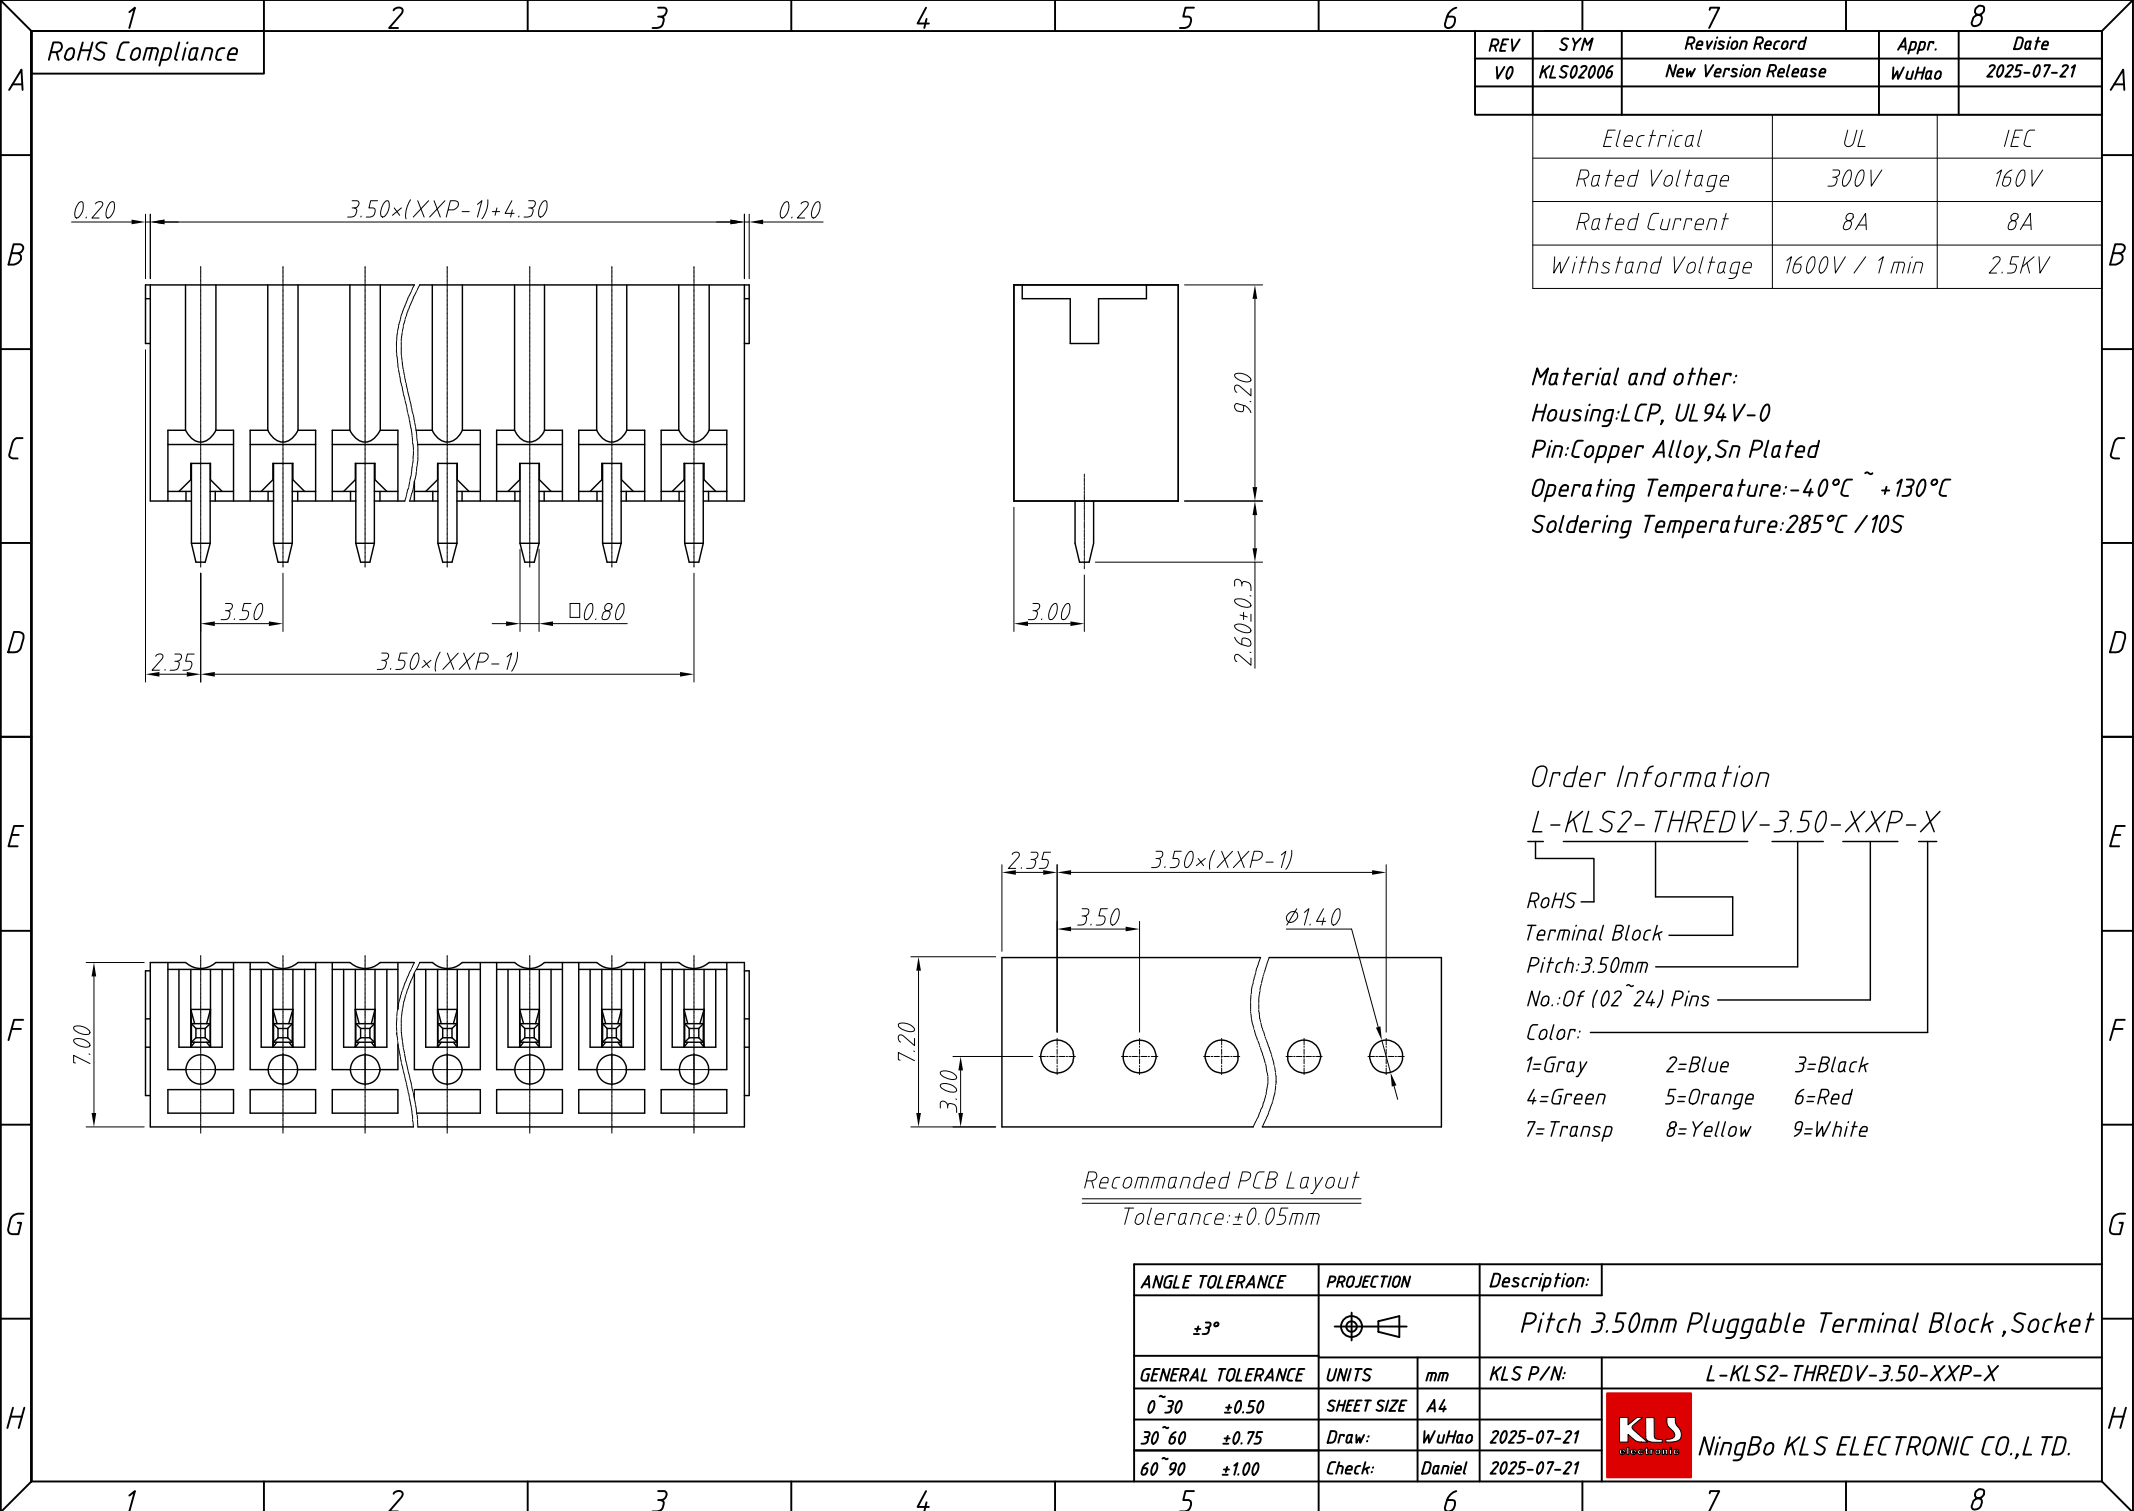


RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	WuHao	2025-07-21
		Electrical	UL	IEC
		Rated Voltage	300V	160V
		Rated Current	8A	8A
		Withstand Voltage	1600V / 1 min	2.5KV

Material and other:
Housing:LCP, UL94V-0
Pin:Copper Alloy,Sn Plated
Operating Temperature:-40℃ ~ +130℃
Soldering Temperature:285℃ /10S

Order Information

L-KLS2-THREDV-3.50-XXP-X

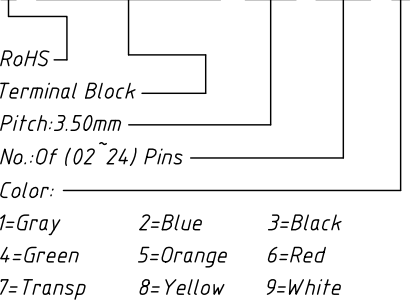

Recommended PCB Layout
Tolerance:±0.05mm

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 3.50mm Pluggable Terminal Block ,Socket
GENERAL TOLERANCE	UNITS	mm
0~30	±0.50	SHEET SIZE A4
30~60	±0.75	Draw: WuHao 2025-07-21
60~90	±1.00	Check: Daniel 2025-07-21