


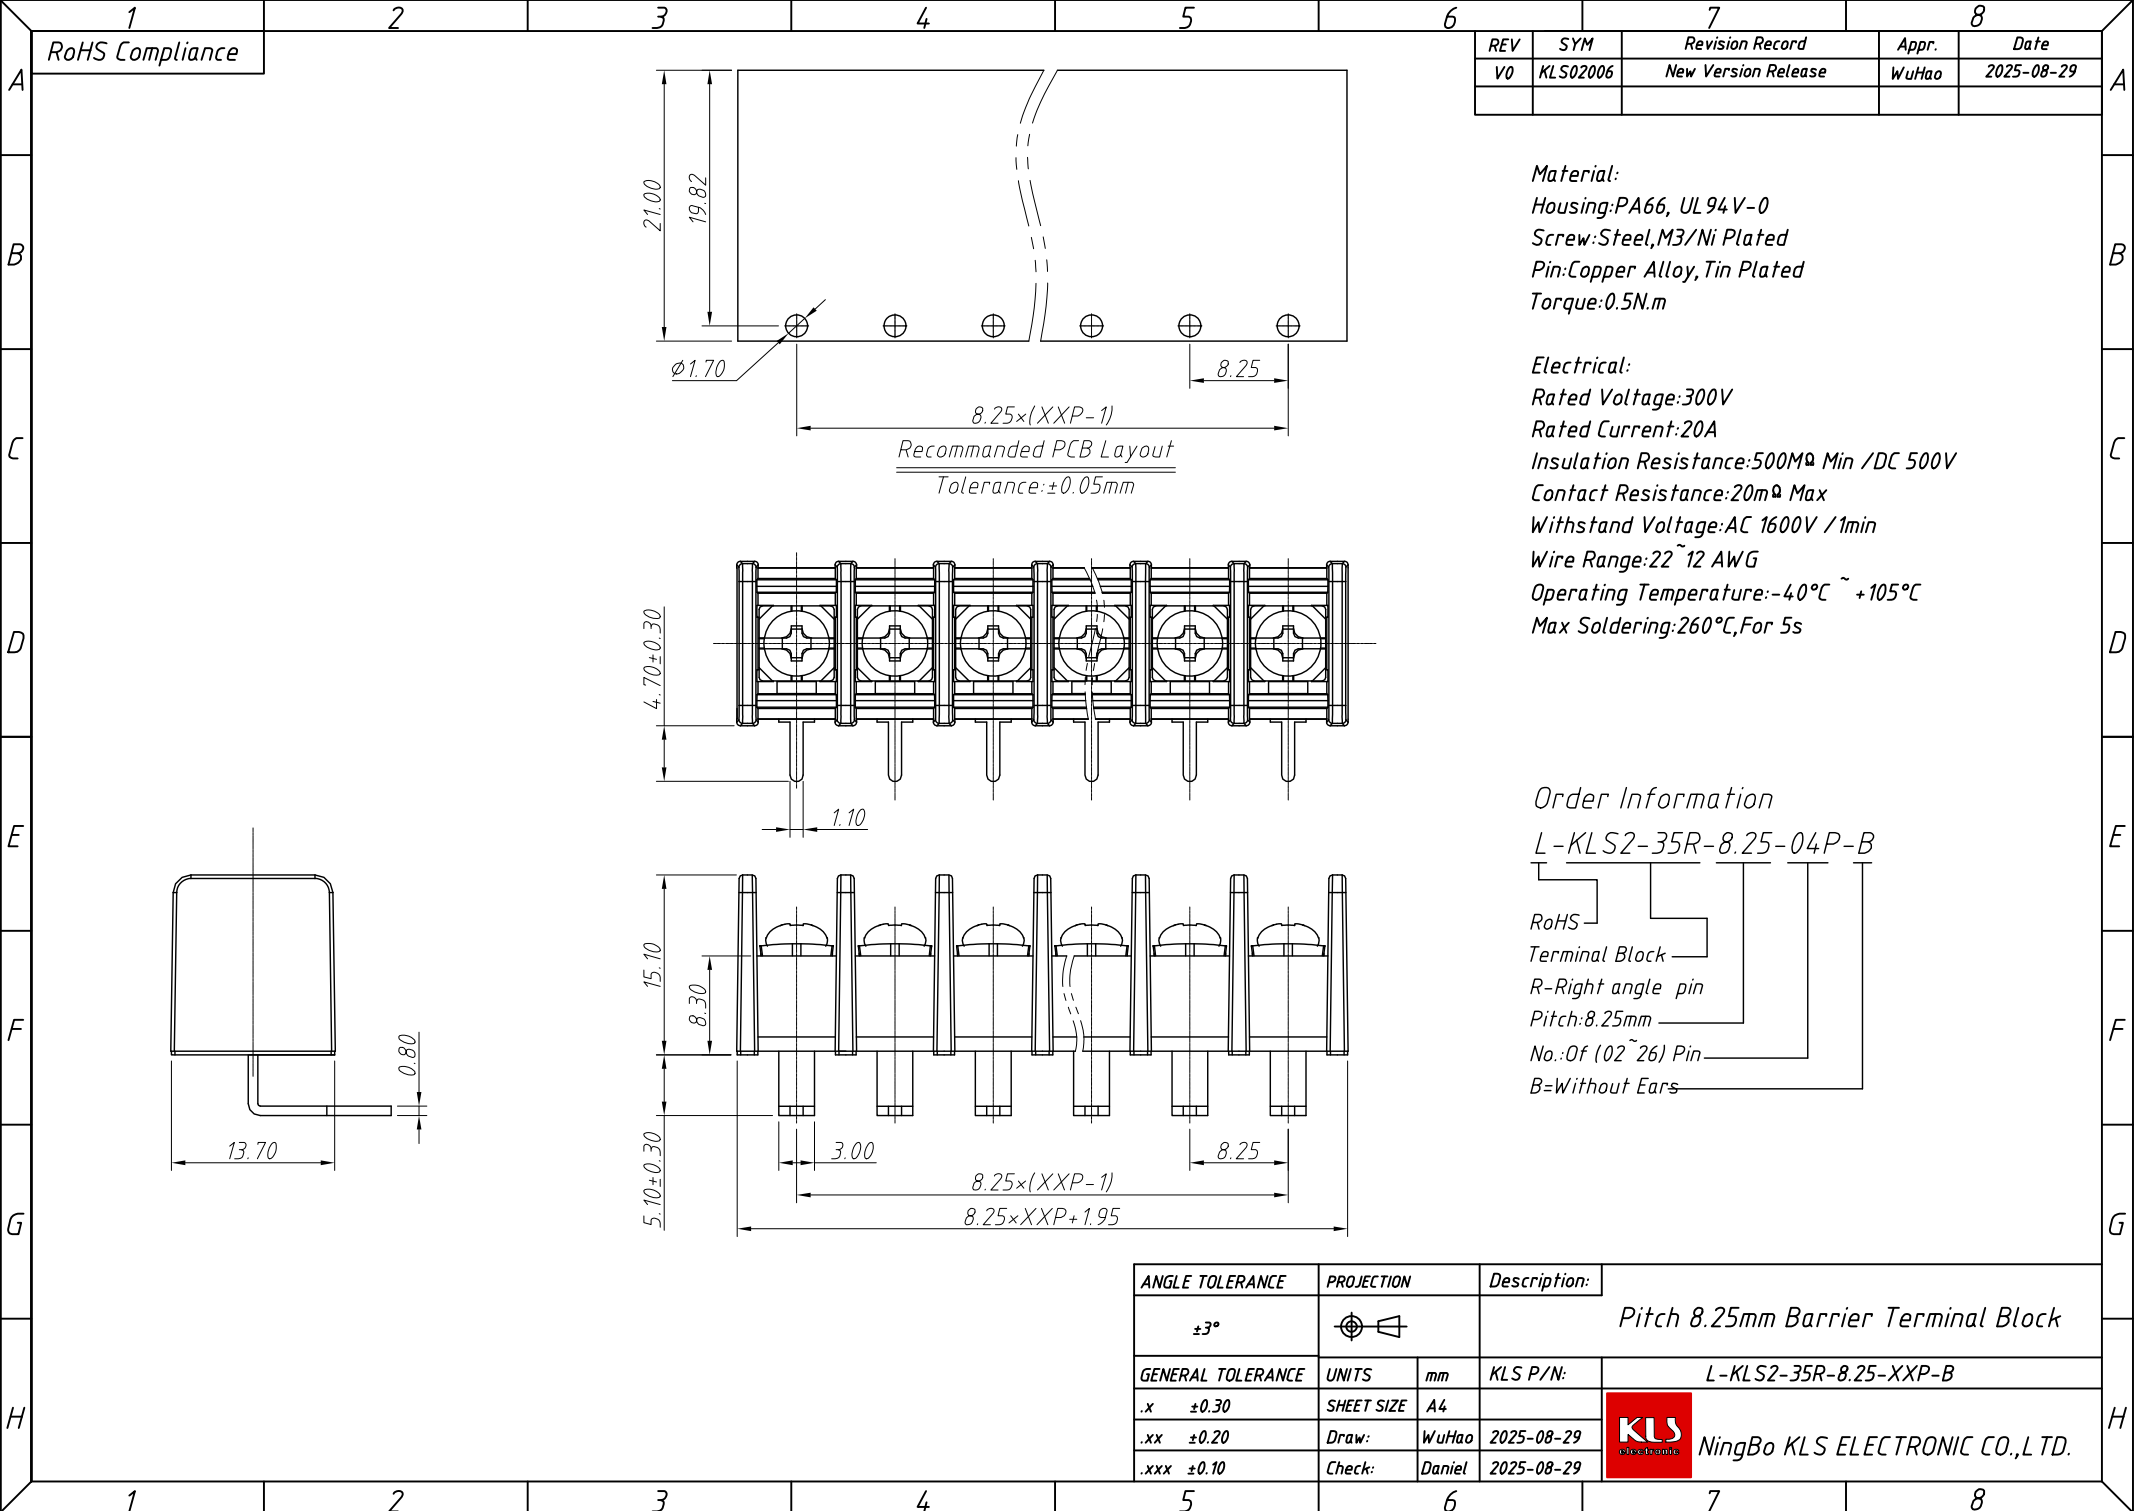

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	WuHao	2025-08-29

Material:
Housing:PA66, UL94V-0
Screw:Steel,M3/Ni Plated
Pin:Copper Alloy,Tin Plated
Torque:0.5N.m

Electrical:
Rated Voltage:300V
Rated Current:20A
Insulation Resistance:500M Ω Min /DC 500V
Contact Resistance:20m Ω Max
Withstand Voltage:AC 1600V /1min
Wire Range:22~12 AWG
Operating Temperature:-40 $^{\circ}$ C ~ +105 $^{\circ}$ C
Max Soldering:260 $^{\circ}$ C,For 5s

Order Information
L-KLS2-35R-8.25-04P-B
RoHS
Terminal Block
R-Right angle pin
Pitch:8.25mm
No.:Of (02~26) Pin
B=Without Ears

ANGLE TOLERANCE	PROJECTION	Description:
$\pm 3^{\circ}$		Pitch 8.25mm Barrier Terminal Block
GENERAL TOLERANCE	UNITS	mm
.x ± 0.30	SHEET SIZE	A4
.xx ± 0.20	Draw:	WuHao 2025-08-29
.xxx ± 0.10	Check:	Daniel 2025-08-29

NingBo KLS ELECTRONIC CO.,LTD.