


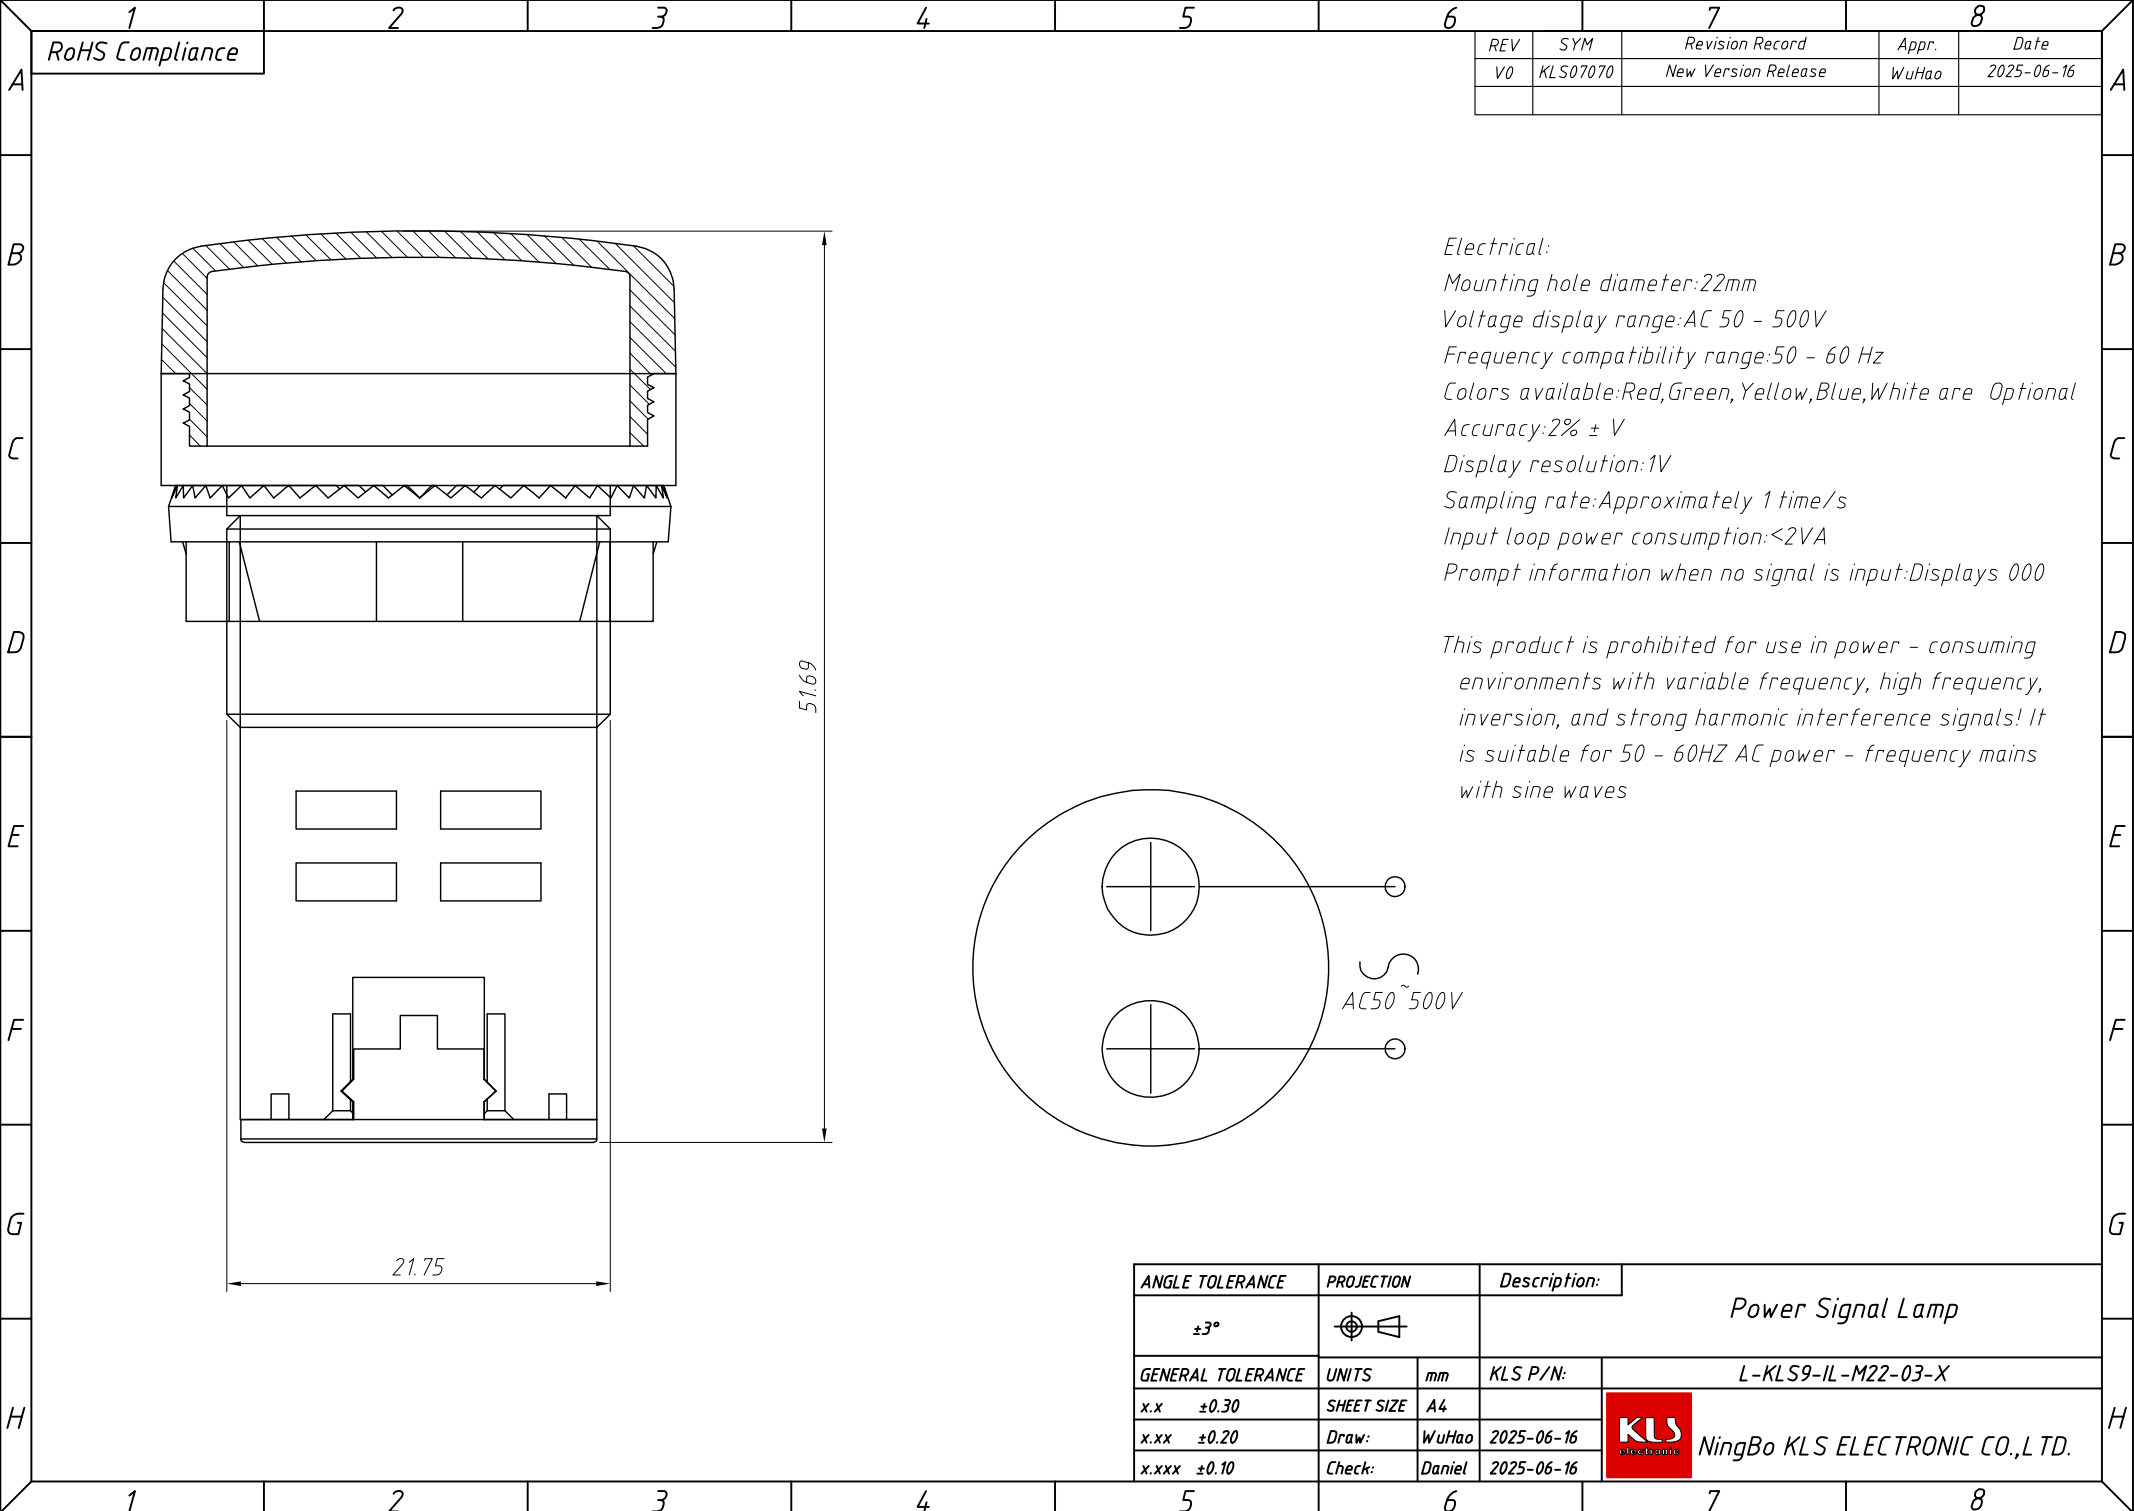

RoHS Compliance

| REV | SYM      | Revision Record     | Appr. | Date       |
|-----|----------|---------------------|-------|------------|
| V0  | KLS07070 | New Version Release | WuHao | 2025-06-16 |
|     |          |                     |       |            |

Electrical:  
Mounting hole diameter:22mm  
Voltage display range:AC 50 - 500V  
Frequency compatibility range:50 - 60 Hz  
Colors available:Red,Green,Yellow,Blue,White are Optional  
Accuracy:2% ± V  
Display resolution:1V  
Sampling rate:Approximately 1 time/s  
Input loop power consumption:<2VA  
Prompt information when no signal is input:Displays 000

This product is prohibited for use in power - consuming environments with variable frequency, high frequency, inversion, and strong harmonic interference signals! It is suitable for 50 - 60HZ AC power - frequency mains with sine waves

| ANGLE TOLERANCE   | PROJECTION |        | Description:      |                                 |
|-------------------|------------|--------|-------------------|---------------------------------|
| ±3°               |            |        | Power Signal Lamp |                                 |
| GENERAL TOLERANCE | UNITS      | mm     | KLS P/N:          | L-KLS9-IL-M22-03-X              |
| x.x ±0.30         | SHEET SIZE | A4     |                   |                                 |
| x.xx ±0.20        | Draw:      | WuHao  | 2025-06-16        | NingBo KLS ELECTRONIC CO.,L TD. |
| x.xxx ±0.10       | Check:     | Daniel | 2025-06-16        |                                 |