


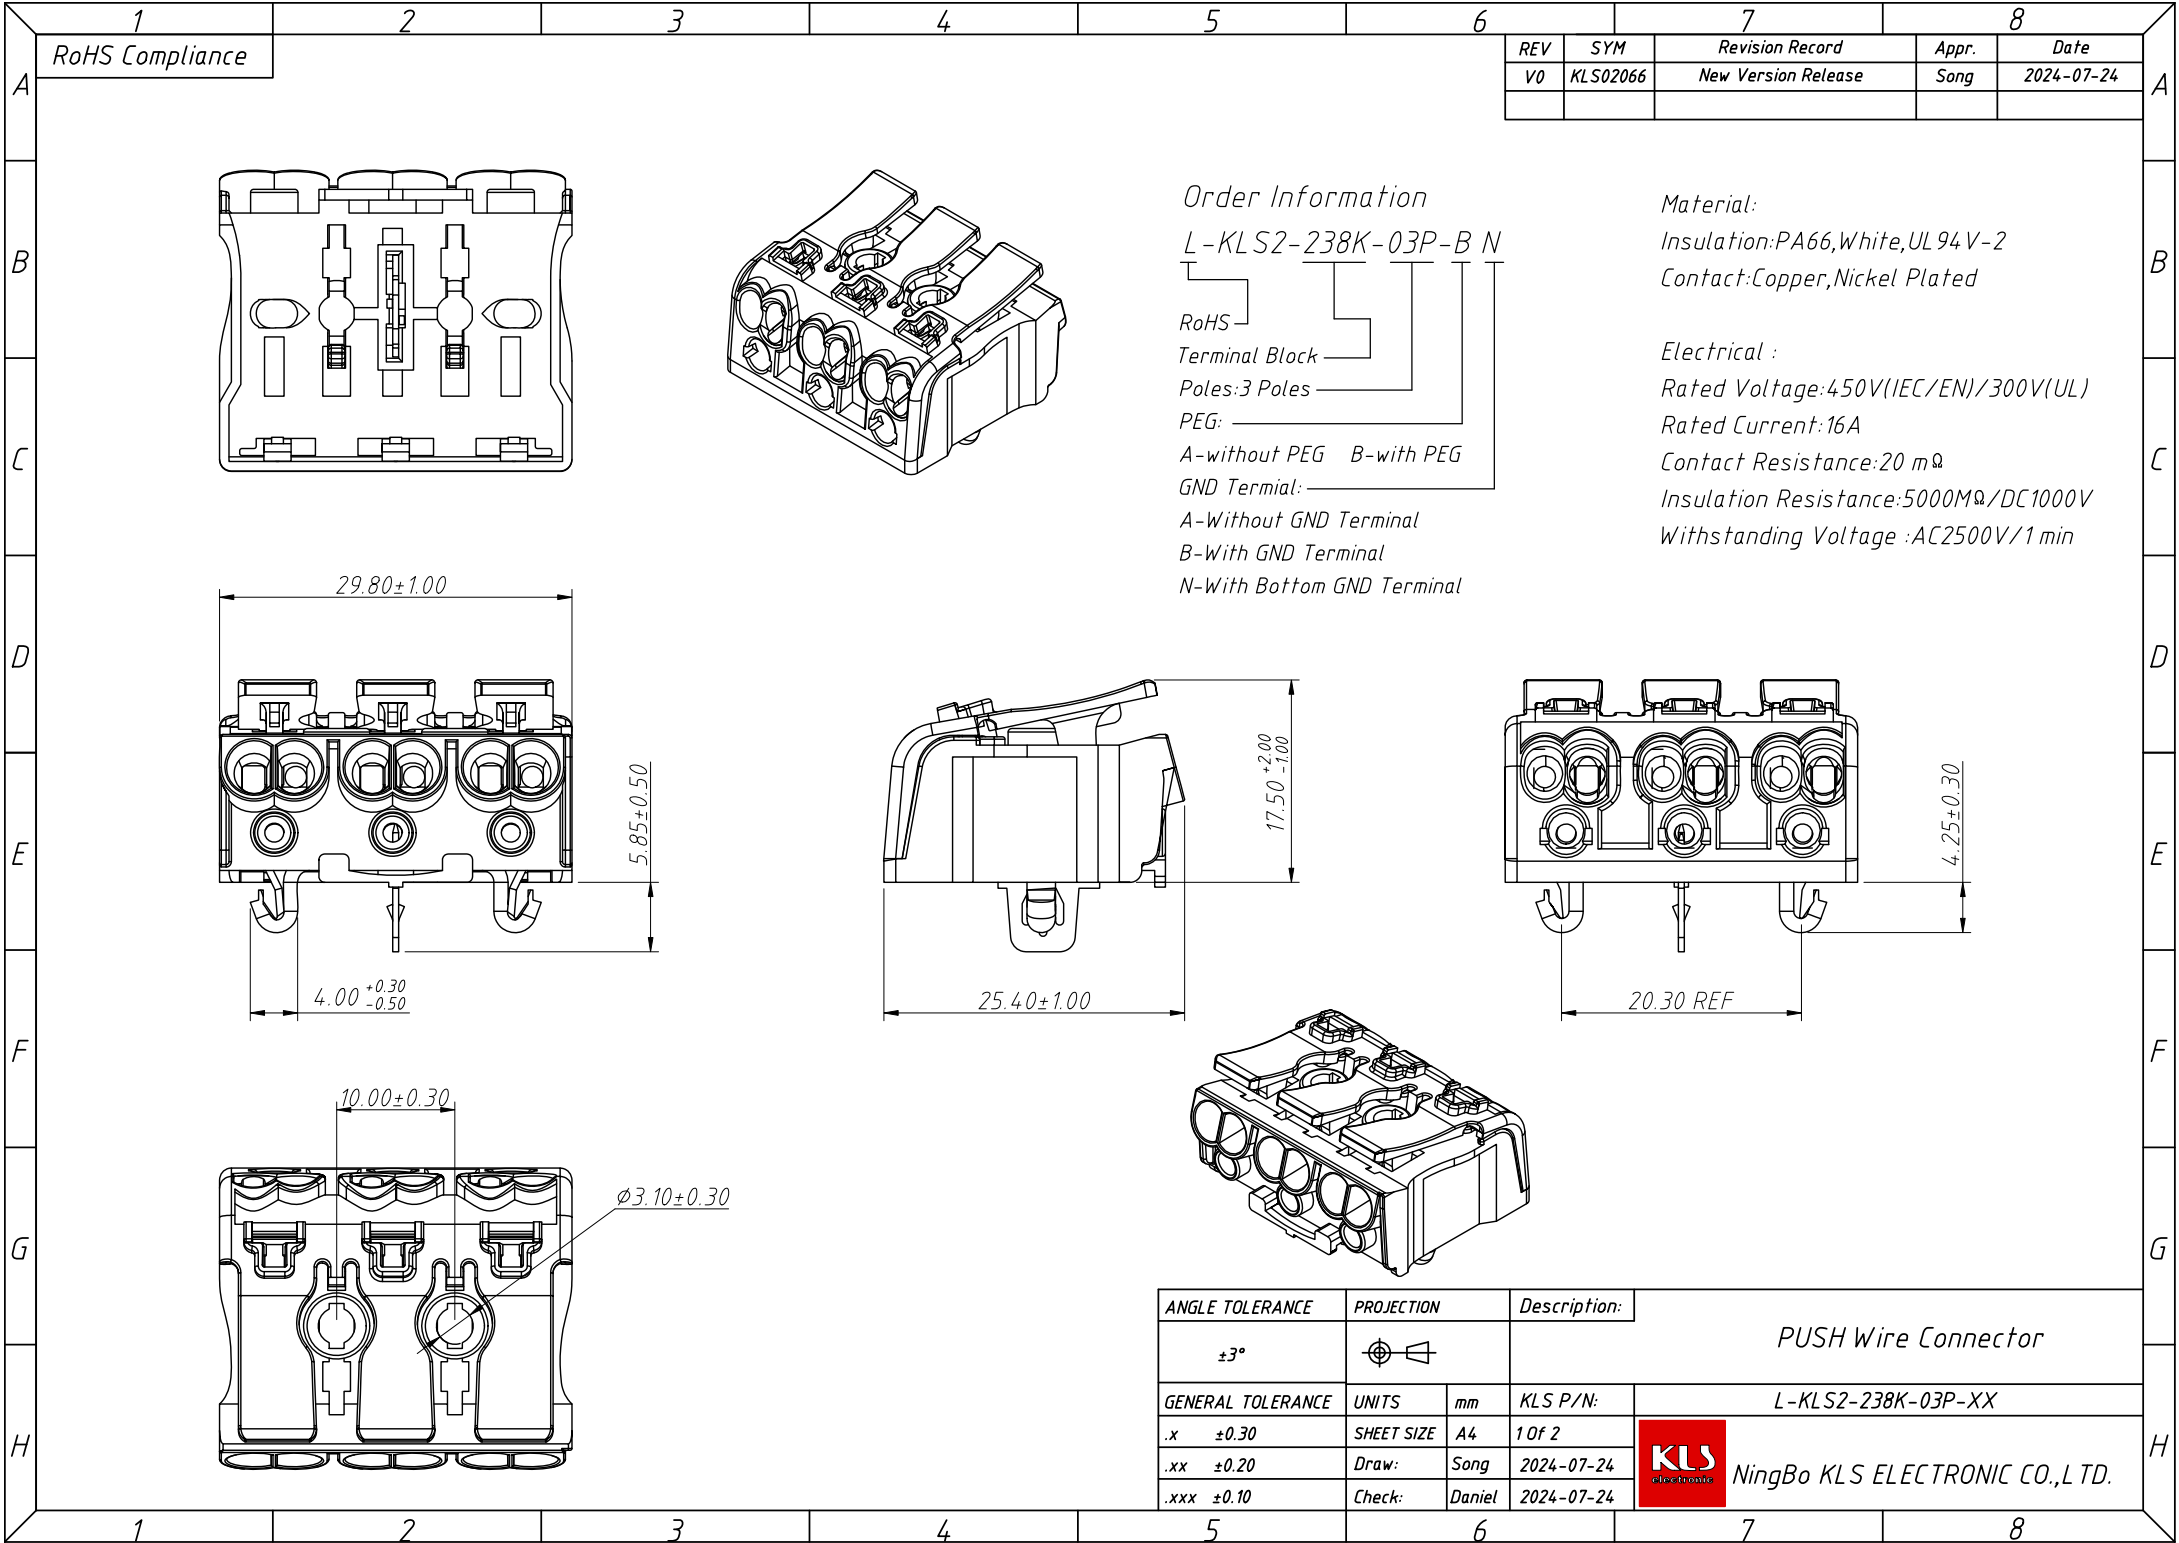

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02066	New Version Release	Song	2024-07-24

Order Information

L-KLS2-238K-03P-B N

RoHS
Terminal Block
Poles:3 Poles
PEG:
A-without PEG B-with PEG
GND Termial:
A-Without GND Terminal
B-With GND Terminal
N-With Bottom GND Terminal

Material:
Insulation:PA66,White,UL94 V-2
Contact:Copper,Nickel Plated

Electrical :
Rated Voltage:450V(IEC/EN)/300V(UL)
Rated Current:16A
Contact Resistance:20 mΩ
Insulation Resistance:5000MΩ/DC1000V
Withstanding Voltage:AC2500V/1 min

ANGLE TOLERANCE	PROJECTION	Description:
±3°		PUSH Wire Connector
GENERAL TOLERANCE	UNITS	mm
.x ±0.30	SHEET SIZE	A4
.xx ±0.20	Draw:	Song
.xxx ±0.10	Check:	Daniel

KLS P/N:	L-KLS2-238K-03P-XX
1 of 2	
2024-07-24	
2024-07-24	

NingBo KLS ELECTRONIC CO.,LTD.

