


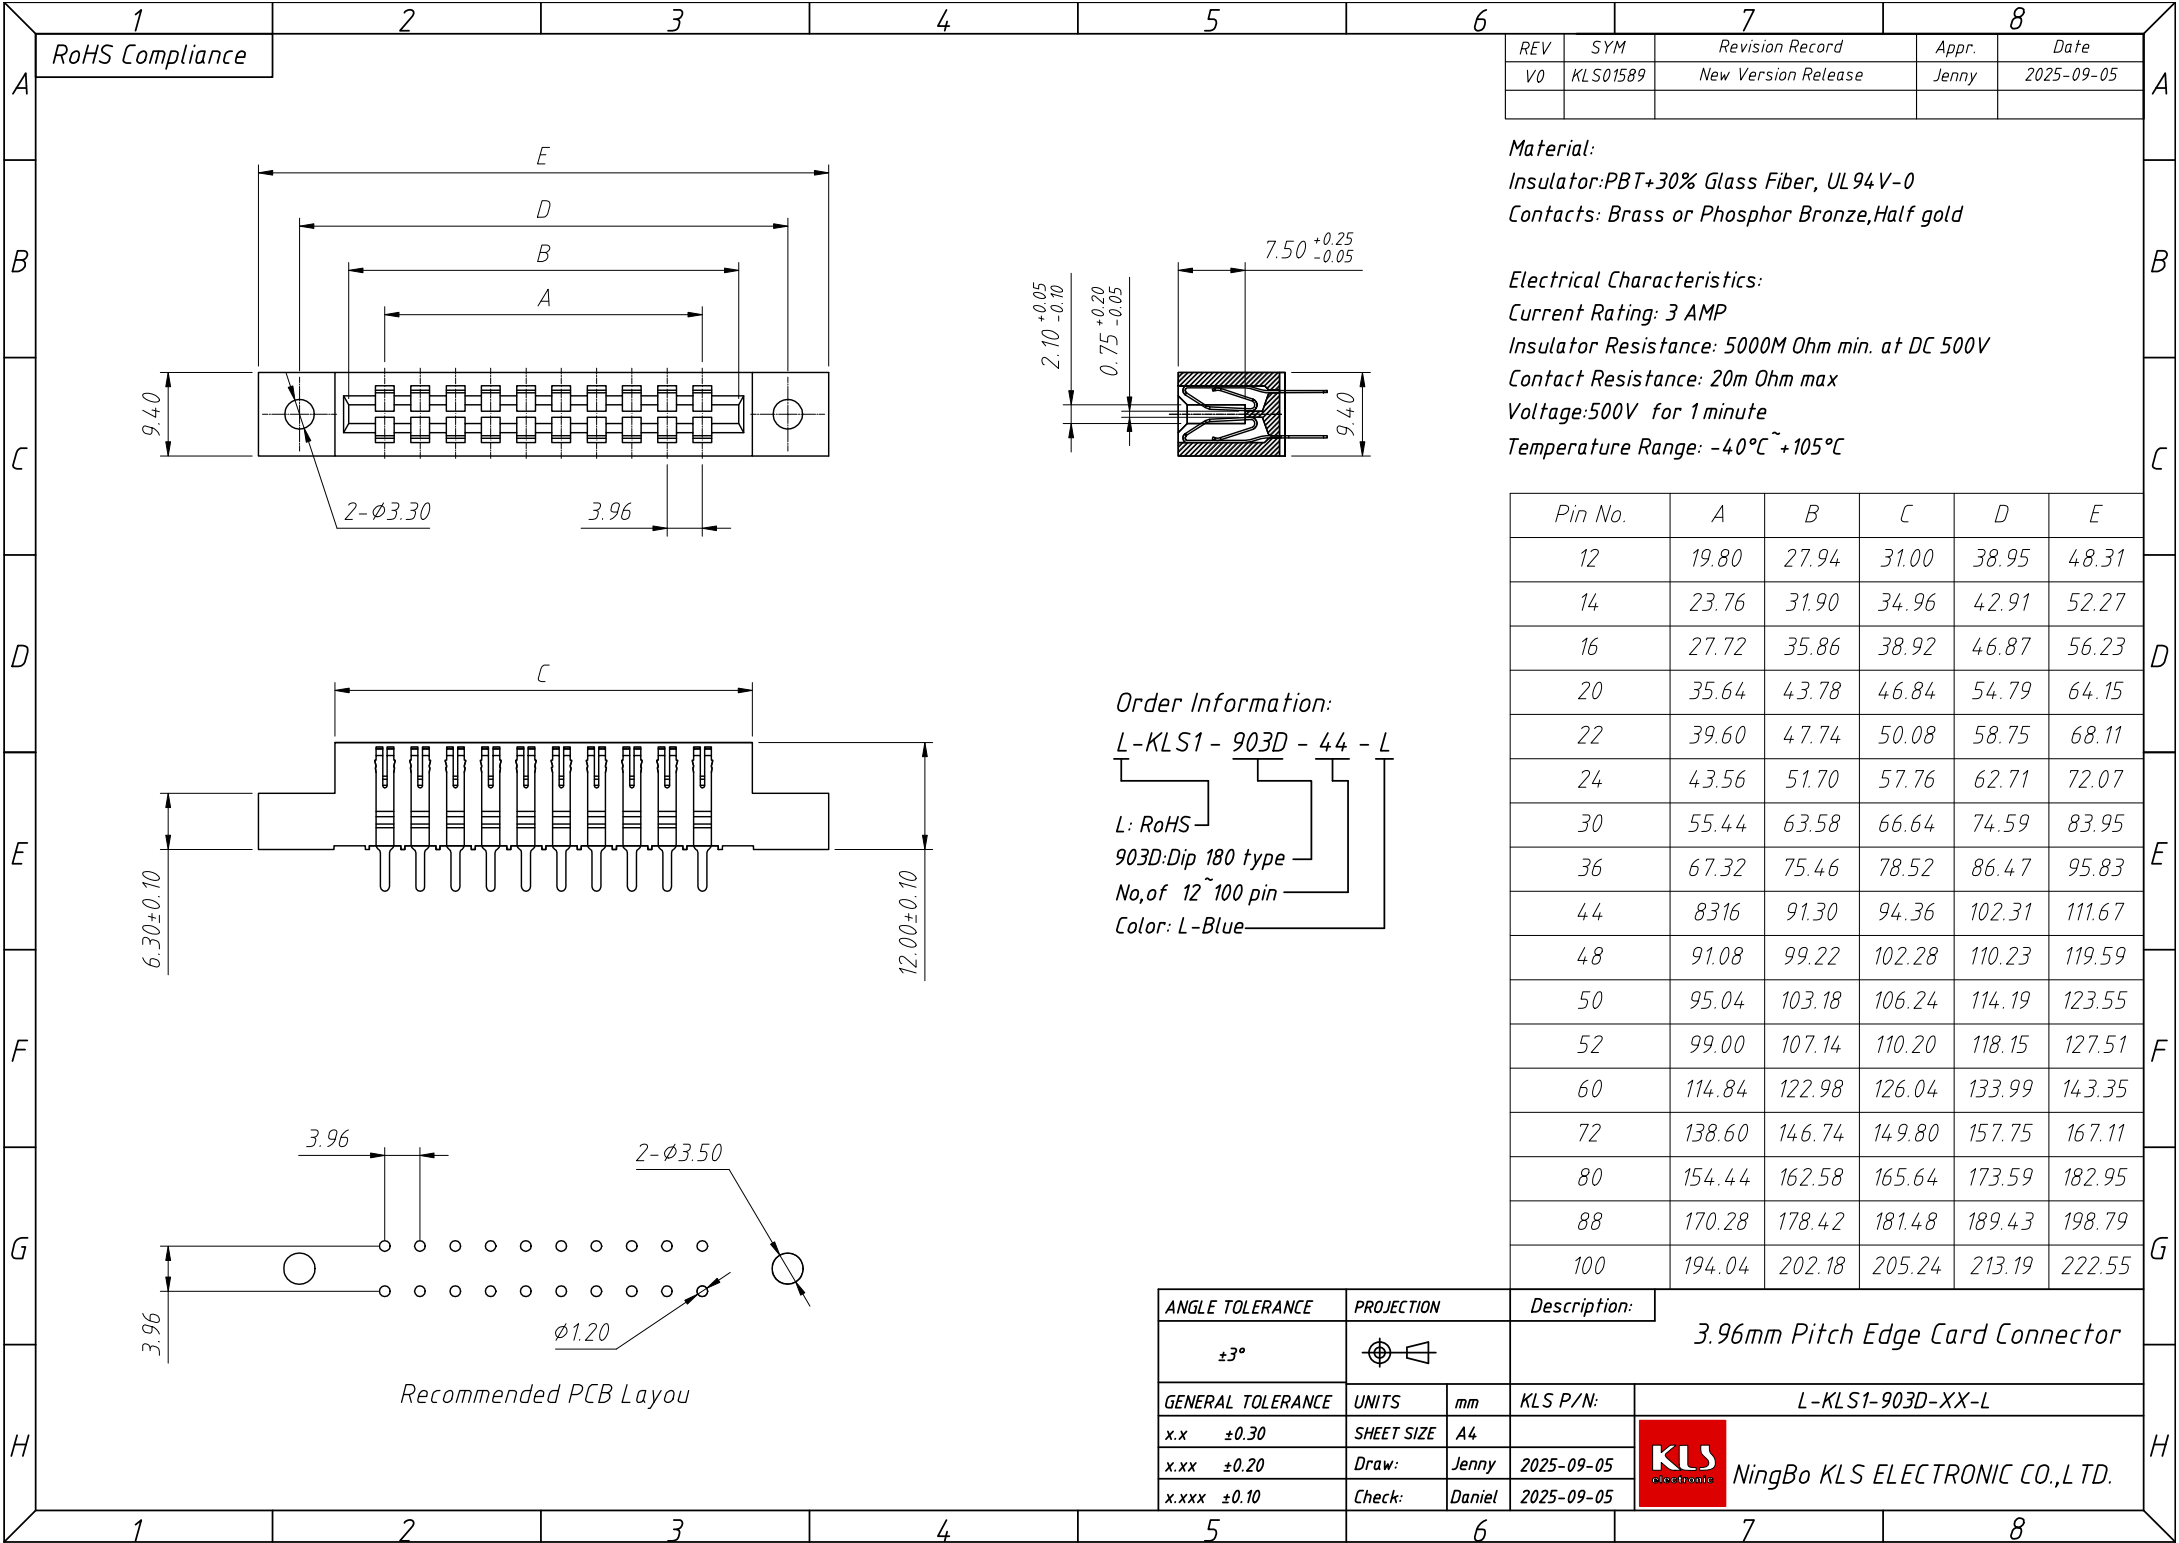

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01589	New Version Release	Jenny	2025-09-05

Material:
Insulator:PBT+30% Glass Fiber, UL94V-0
Contacts: Brass or Phosphor Bronze,Half gold

Electrical Characteristics:
Current Rating: 3 AMP
Insulator Resistance: 5000M Ohm min. at DC 500V
Contact Resistance: 20m Ohm max
Voltage:500V for 1 minute
Temperature Range: -40°C~+105°C

Pin No.	A	B	C	D	E
12	19.80	27.94	31.00	38.95	48.31
14	23.76	31.90	34.96	42.91	52.27
16	27.72	35.86	38.92	46.87	56.23
20	35.64	43.78	46.84	54.79	64.15
22	39.60	47.74	50.08	58.75	68.11
24	43.56	51.70	57.76	62.71	72.07
30	55.44	63.58	66.64	74.59	83.95
36	67.32	75.46	78.52	86.47	95.83
44	83.16	91.30	94.36	102.31	111.67
48	91.08	99.22	102.28	110.23	119.59
50	95.04	103.18	106.24	114.19	123.55
52	99.00	107.14	110.20	118.15	127.51
60	114.84	122.98	126.04	133.99	143.35
72	138.60	146.74	149.80	157.75	167.11
80	154.44	162.58	165.64	173.59	182.95
88	170.28	178.42	181.48	189.43	198.79
100	194.04	202.18	205.24	213.19	222.55

Order Information:
L-KLS1-903D-44-L
L: RoHS
903D:Dip 180 type
No,of 12~100 pin
Color: L-Blue

ANGLE TOLERANCE	PROJECTION	Description:
±3°		3.96mm Pitch Edge Card Connector
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Jenny
x.xxx ±0.10	Check:	Daniel

NingBo KLS ELECTRONIC CO.,LTD.