

Product Specification

Number: L-KLS1-6G-T-SMD10.3*03*1.6

Name: 10.3*3.0*1.6 mm³
SMD Antenna

Customer: _____

Date: 2025-08-19

Customer Signature:



NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

**ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.**

Compi	Check	Review	Approva
Jenny	Jack.C		

◆ Features

- Light weight and low profile 10.3mm(L)X3.0mm(W)X1.6mm(H)
- Omni-directional in azimuth
- Lead (Pb) Free

◆ Applications


- 2.4GHz & 5~6GHz wireless communications
- 2.4GHz & 5~6GHz Modules
- 802.11a/b/g Wireless LAN System

Specifications

Center frequency	2.45GHz & 5~6GHz
Peak gain	1dBi
Operation temperature	-40 ~ +85 °C
Storage temperature	-40 ~ +85 °C
VSWR	2.0 (max)
Input Impedance	50 Ohm
Power handling	3W (max)
Bandwidth	2.45GHz 70MHz 5~6GHz 500MHz
Azimuth beamwidth	Omni-directional
Polarization	Linear


Pin configuration

Top view

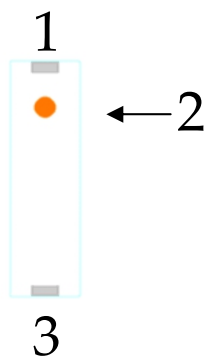


Pin No	Pin assignment
1	Feed termination
2	Feed point mark
3	Solder termination

Dimensions

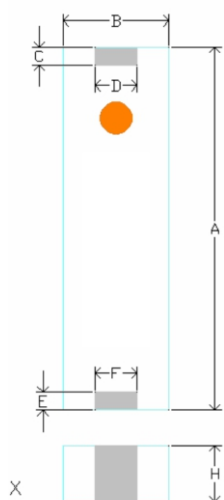

Symbol	Dimensions(mm)
A	10.3 ± 0.10
B	3.00 ± 0.10
C	0.50 ± 0.05
D	1.50 ± 0.10
E	0.50 ± 0.05
F	1.50 ± 0.10
H	1.60 ± 0.20

PCB Foot Print



Symbol	Dimensions(mm)
G	1.0
H	1.9
I	10.3

Part name	10.3*3.0*1.6 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-6G-T-SMD10.3*03*1.6	Edition	V1
Department		Page	4 / 10

Recommended Test Board Pattern


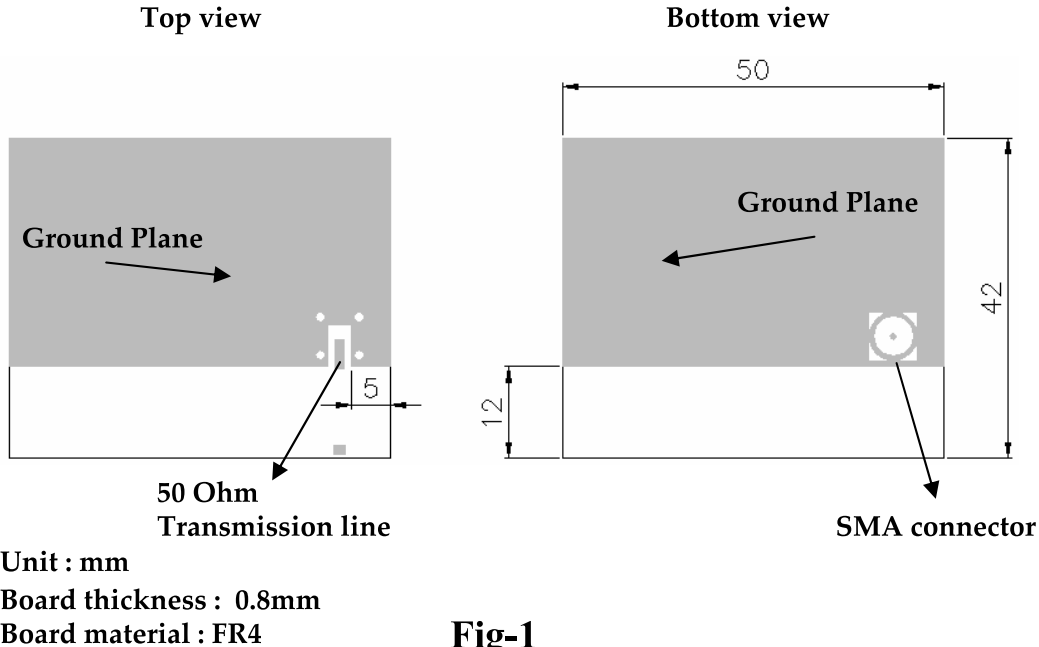


Fig-1

Testing Setup

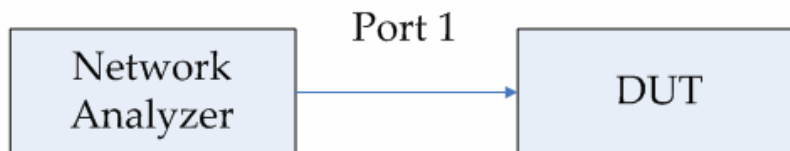

Measurement

Testing Instrument:

Anritsu 37369C VNA(Vector Network Analyzer)




VNA calibrate with 1 path reflection only calibration sequence on test board feed point.


The test board dimension and it's layout is the same as Fig-1.

Typical Electrical Characteristics

Return loss

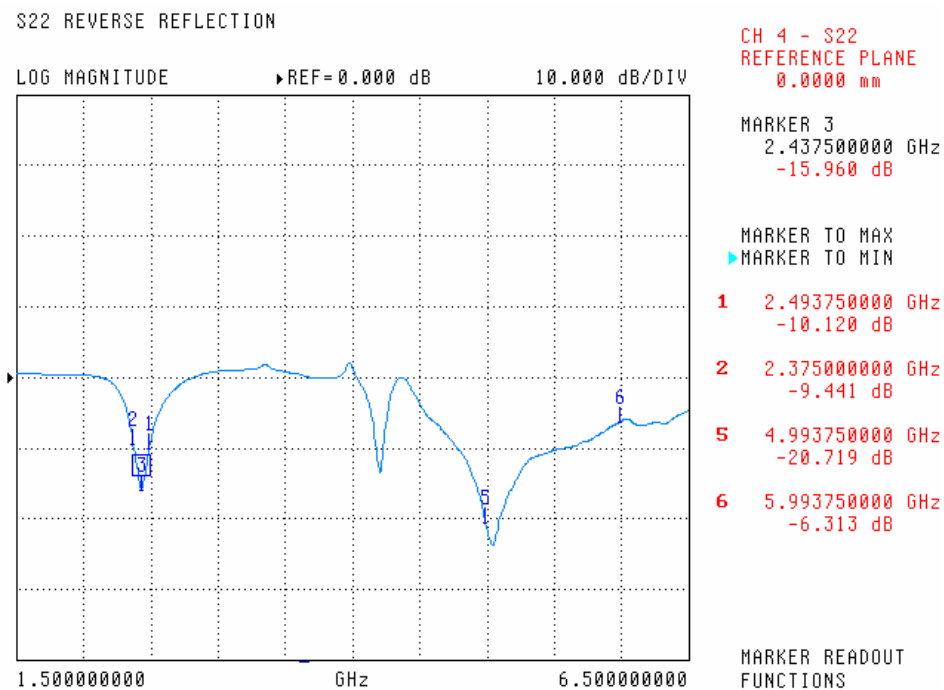


2.45GHz Smith Chart

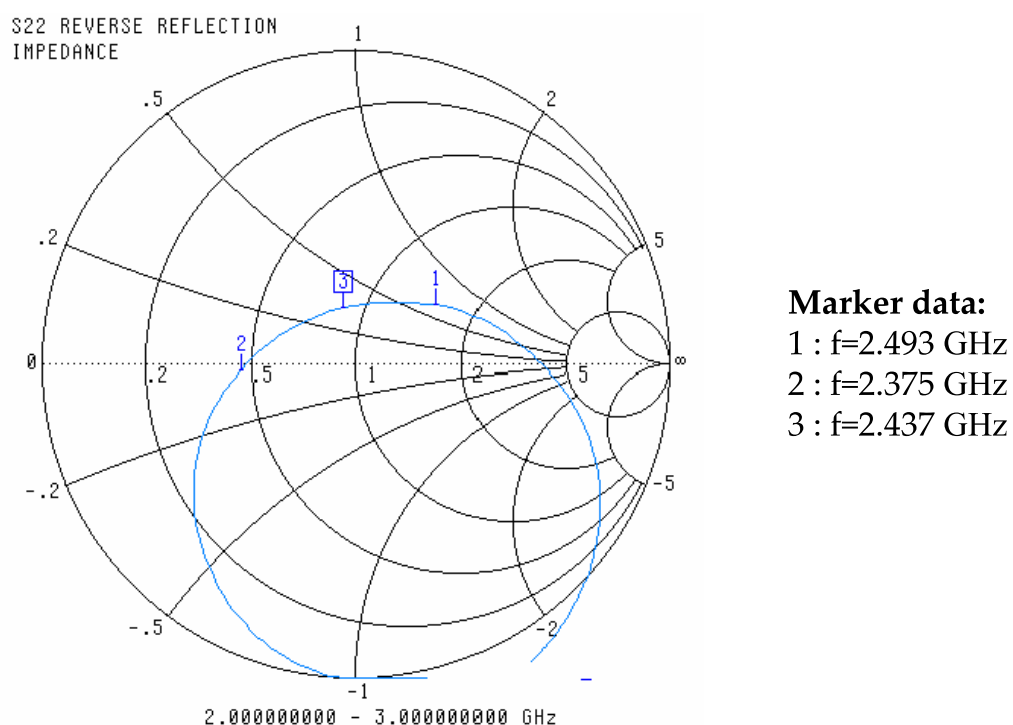

Part name	10.3*3.0*1.6 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-6G-T-SMD10.3*03*1.6	Edition	V1
Department		Page	6 / 10

5.2GHz Smith Chart


S22 REVERSE REFLECTION
IMPEDANCE

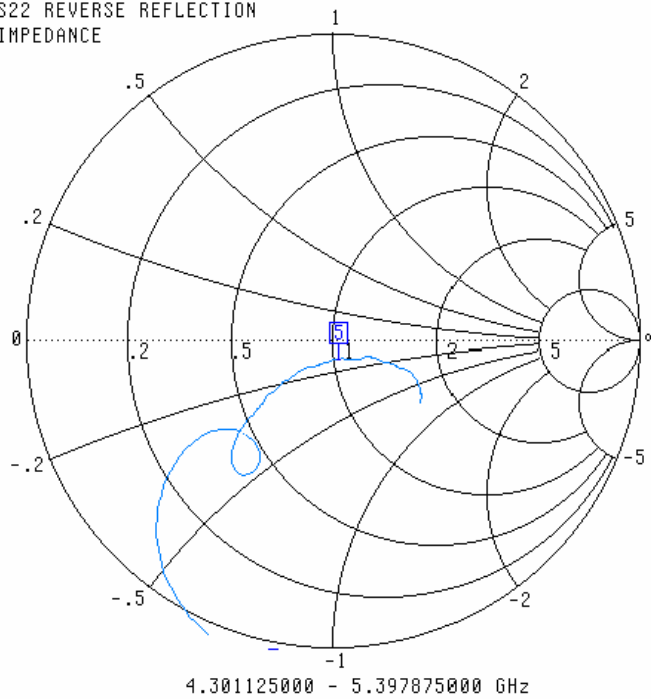


Marker data:
4 : f=4.998 GHz

Typical Radiation Patterns


2.45 GHz H-Plane

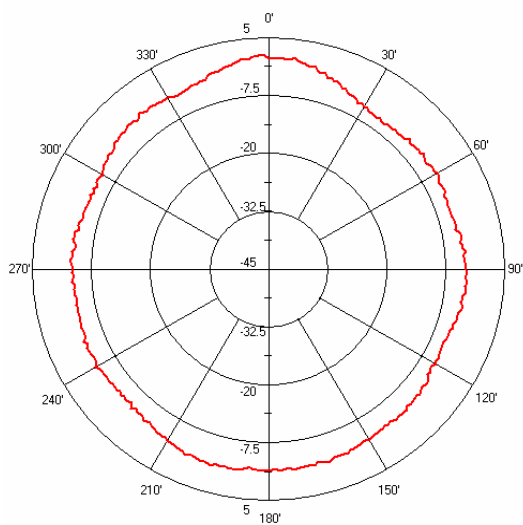


2.45 GHz E-Plane

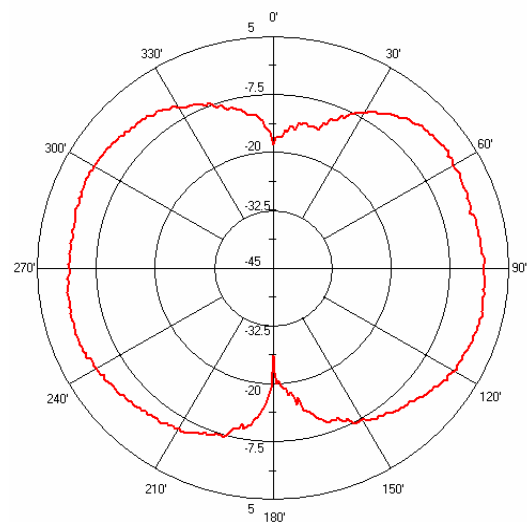


5.2 GHz H-Plane

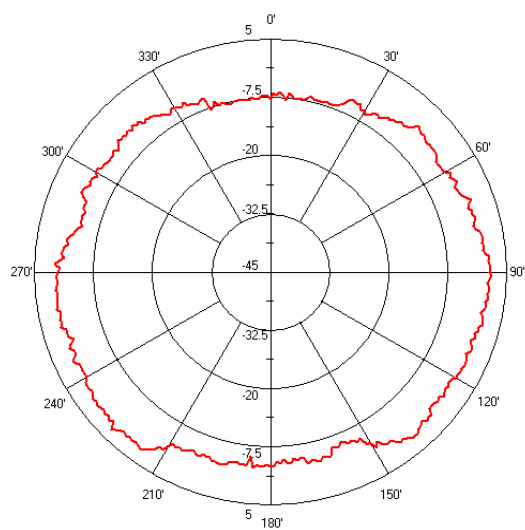


5.2 GHz E-Plane

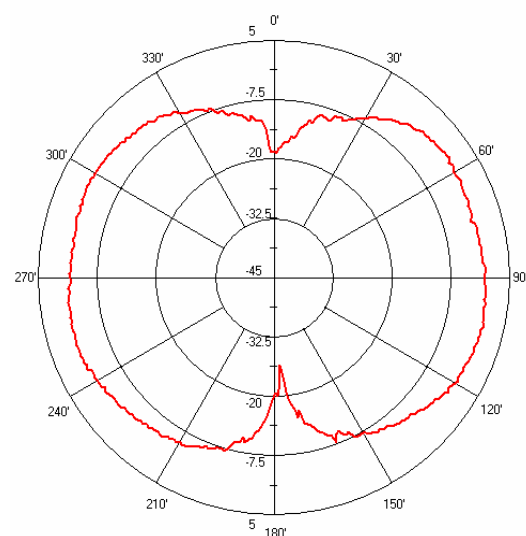

Typical Soldering Profile for Lead-free Process

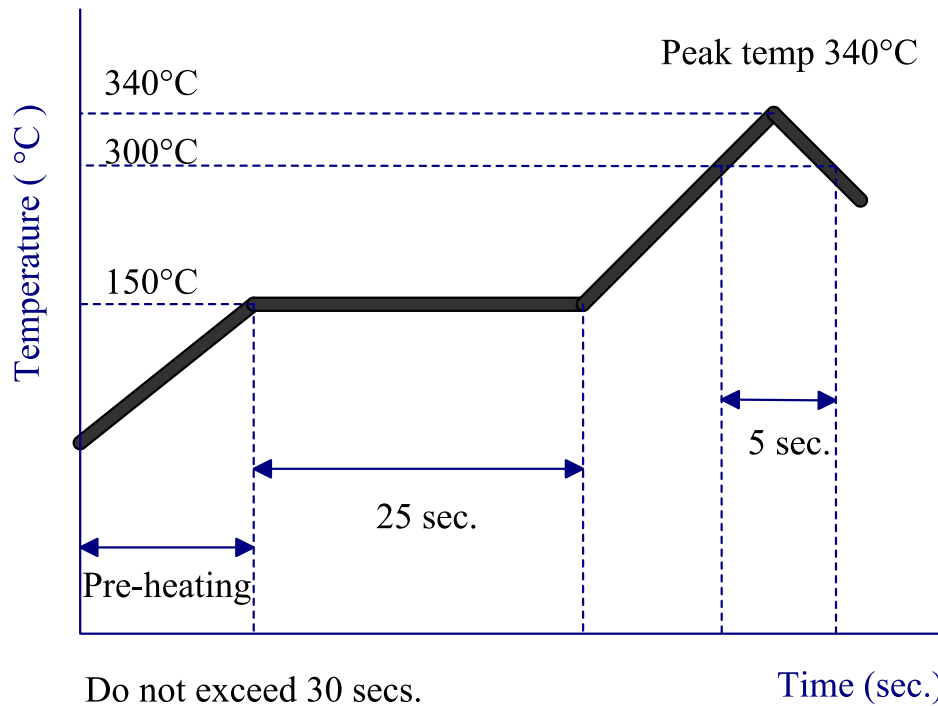


Reflow Soldering

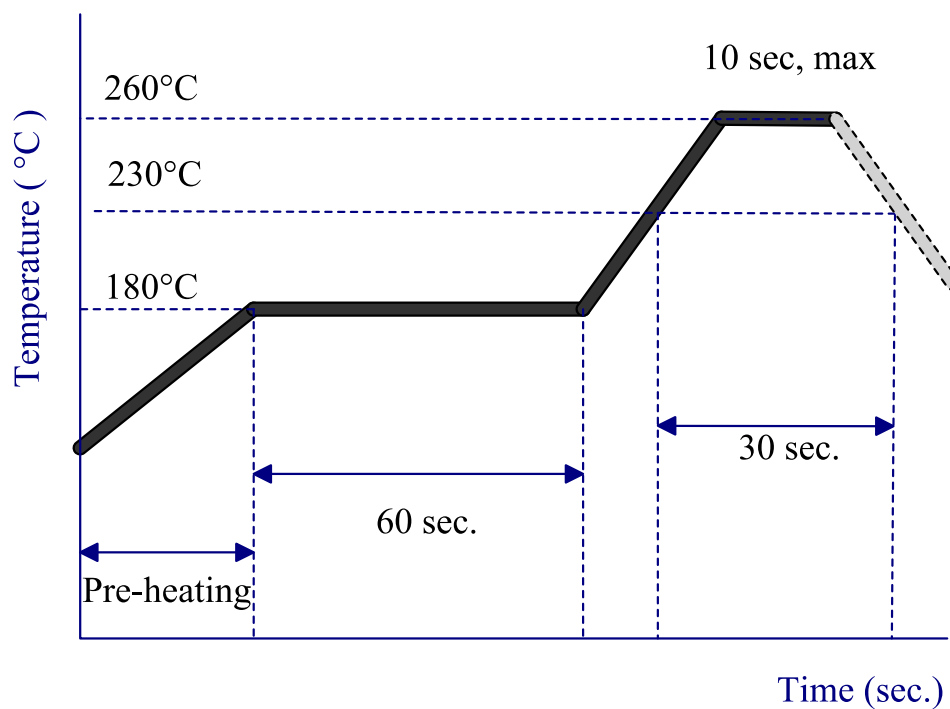


Packing

Blister Tape Specifications

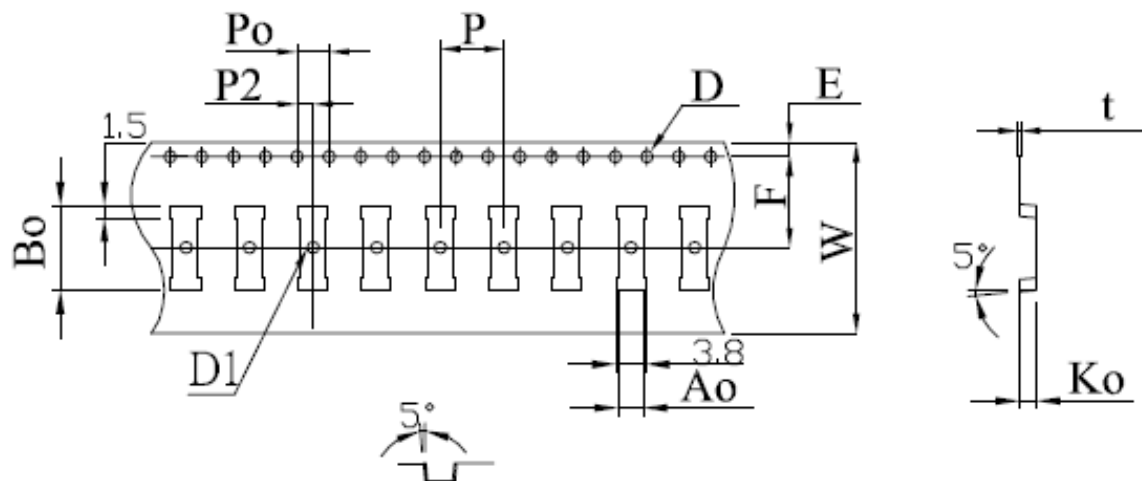

Symbol	Dimension	Tolerance	Unit
W	24.00	± 0.30	mm
E	1.75	± 0.10	mm
F	11.50	± 0.10	mm
D	1.50	+ 0.10 - 0.00	mm
D ₁	1.50	+ 0.25 - 0.00	mm
P ₀	4.00	± 0.10	mm
P	8.00	± 0.10	mm
P ₂	2.00	± 0.10	mm
A ₀	3.20	+ 0.10 3.20	mm
B ₀	10.60	± 0.10	mm
K ₀	2.20	± 0.10	mm
t	0.30	± 0.05	mm

Reel Specifications

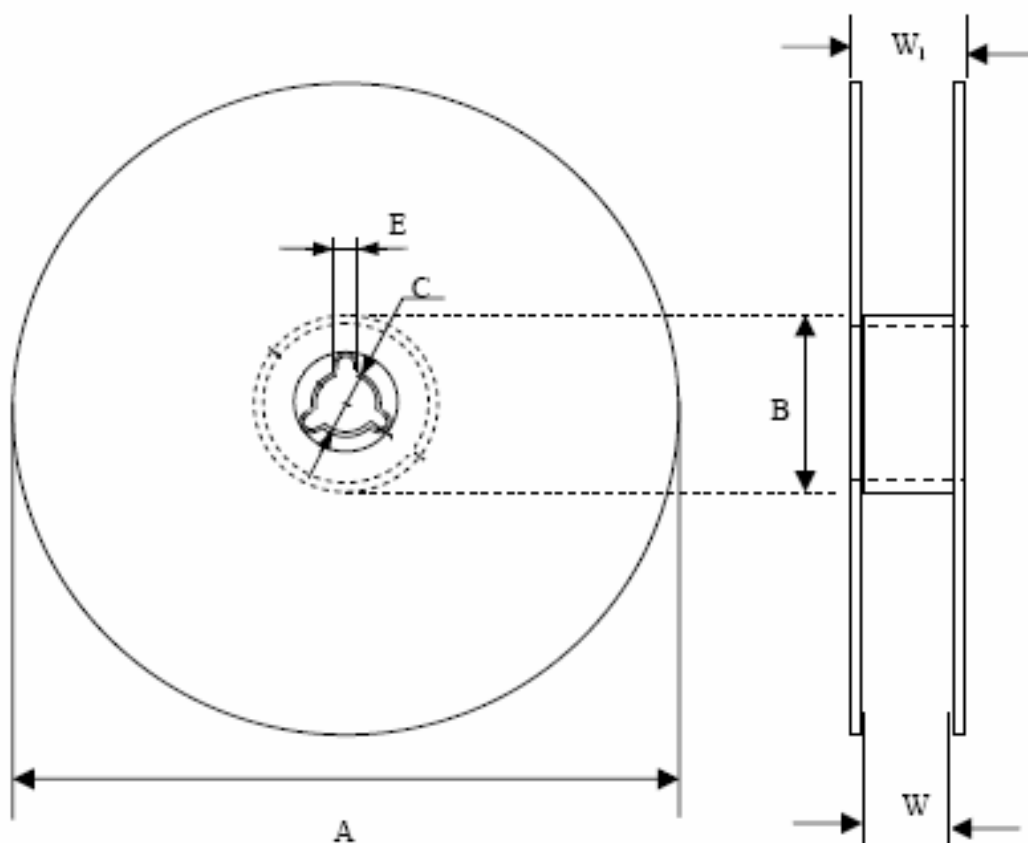

Quantity Per Reel	Tape Width (mm)	A (mm)	C (mm)	B (mm)	E (mm)	W (mm)	W_1 (mm)
3,000	24	330 ± 1	13.0 ± 0.5	100.0 ± 0.5	2.2 ± 0.5	24.0 ± 0.5	28.9 ± 0.2