

Product Specification

Number: L-KLS1-LTE-F-SMD35*8.5*03

Name: 35*8.5*3.0 mm³
SMD Antenna

Customer: _____

Date: 2025-08-14

Customer Signature:



WWW.KLSELE.COM

NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.

Compi	Check	Review	Approva
Jenny	Jack.C		

	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	2 / 18

1. Electrical Specifications

Standards	4G&3G&2G	
Frequency range(MHz)	698~960MHz	1710~2690MHz
Peak Gain (dBi)	-1.6~2.4dBi	-0.3~3.5dBi
Average Gain (dB)	-4.3~-1.8dB	-4.1~-1.7dB
VSWR	< 4.0	< 2.5
Return Loss	< -4.6	< -7.3
Efficiency (%)	37.2~66.3%	39.1~67.9%
Polarization mode	Linear	Linear
Radiation pattern	Omni-Directional	Omni-Directional
Output impedance (Ω)	50	50
Max. Input Power(W)	25	25

Note: All parameters are measured with KLS's EVK which size is 115*65mm

2. Mechanical and Environmental Specification


Mounting Type	SMD
Antenna size(mm)	35.0 (L) x 8.5 (W) x 3.0 (H)
Material	PCB
Operating Temperature (°C)	- 40 °C ~ + 85 °C
Storage Temperature(°C)	- 40 °C ~ + 85 °C

	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	3 / 18


3. Antenna parameters

FRE (MHz)	698	960	1710	2170	2300	2690
VSWR	3.85	3.12	2.51	2.16	2.09	2.13
Return Loss	-4.62	-5.75	-7.32	-8.79	-9.00	-8.82
Eff (%)	37.2	38.2	56.5	39.1	65.5	56.4
Average Gain(dB)	-4.3	-4.2	-2.5	-4.1	-1.8	-2.5

	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	4 / 18

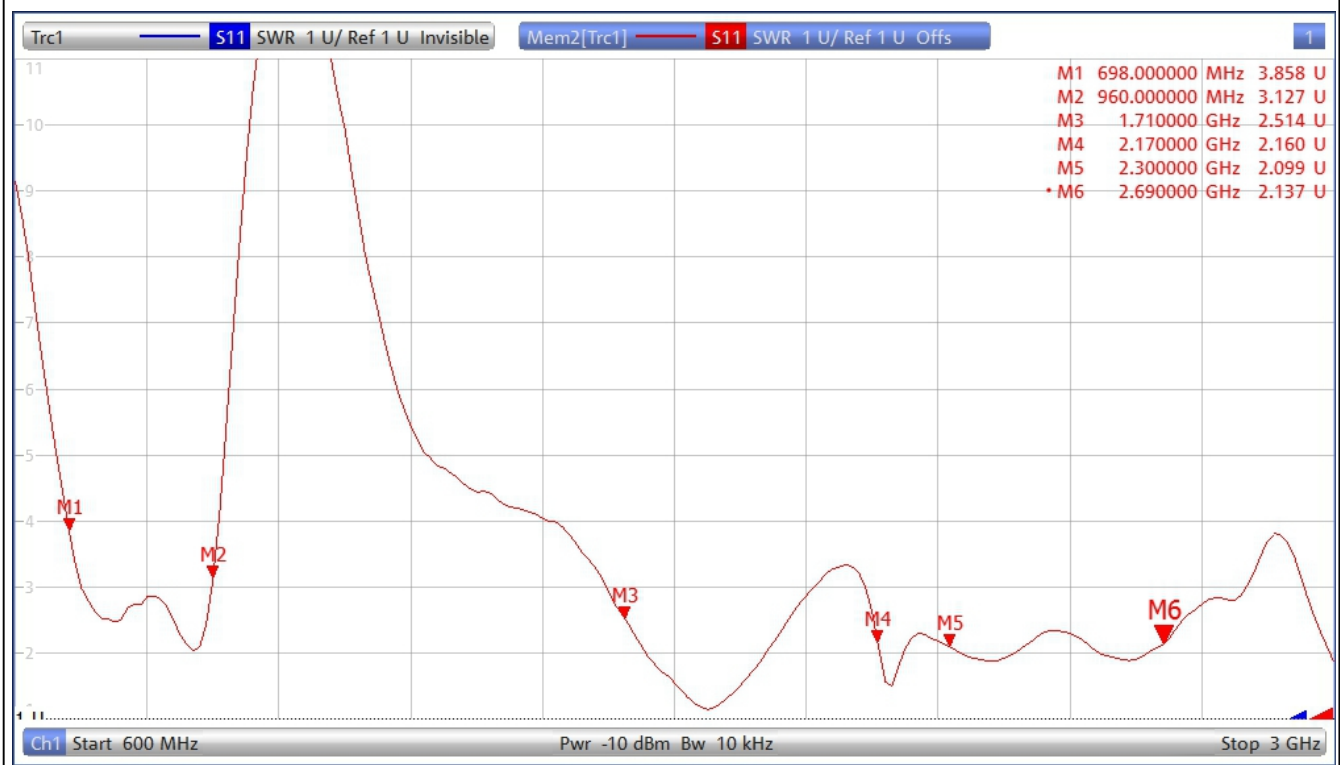

VSWR




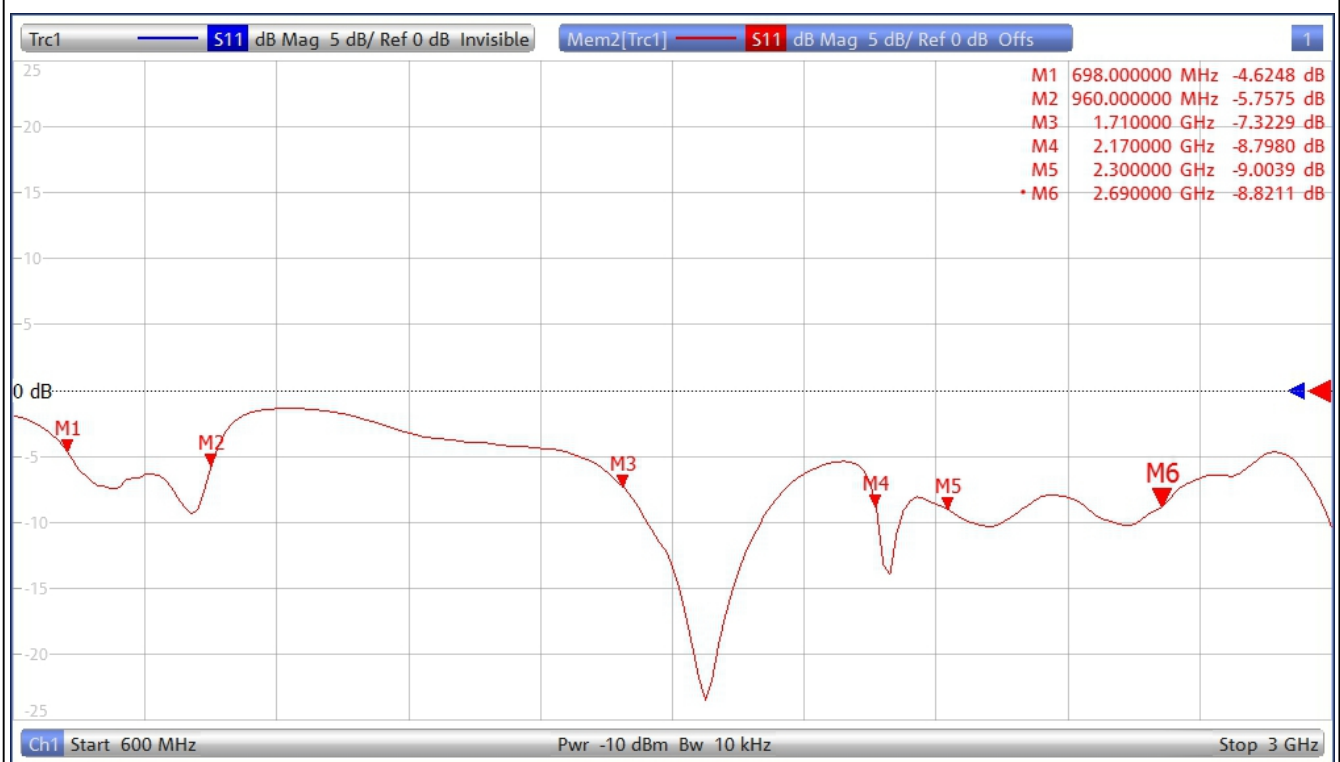


Return Loss

KLS electronic	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	5 / 18


Directional pattern

☐ Board length 110mm

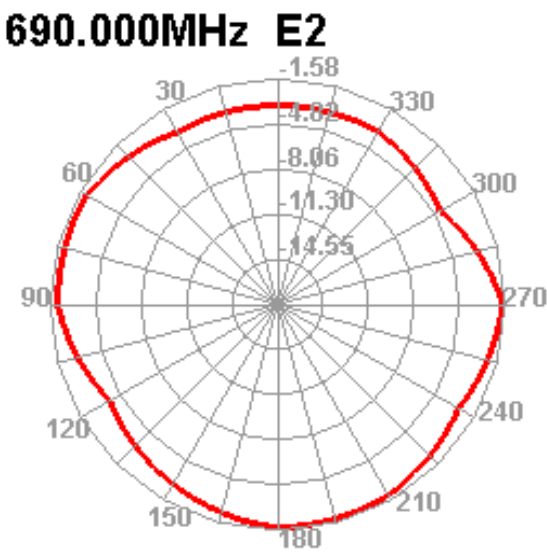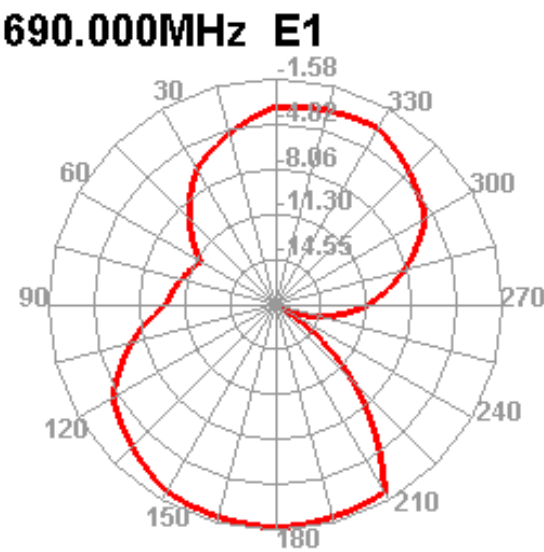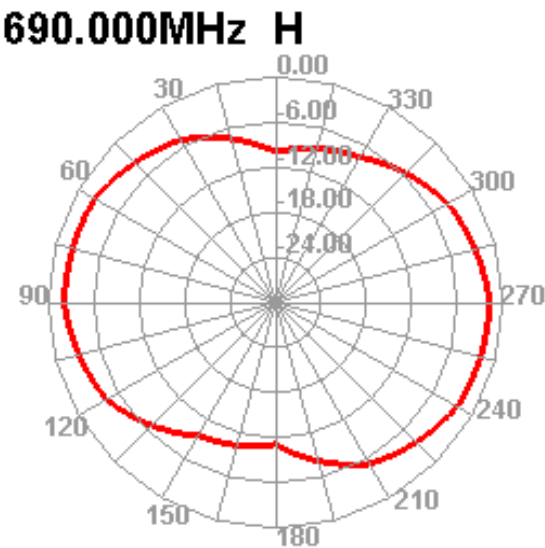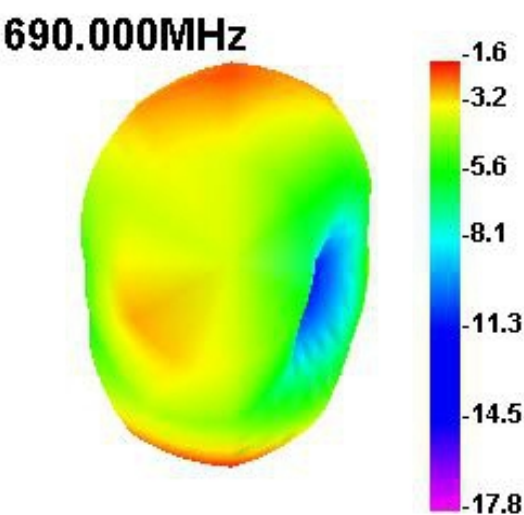


KLS electronic	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	6 / 18


820.000MHz

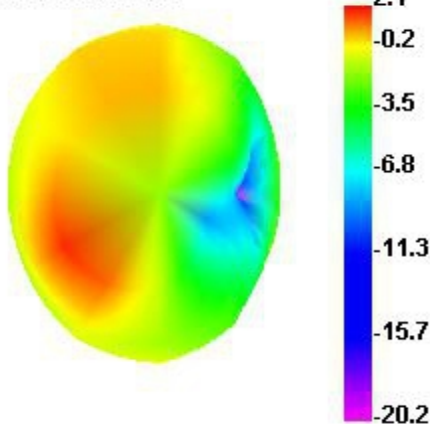


820.000MHz H

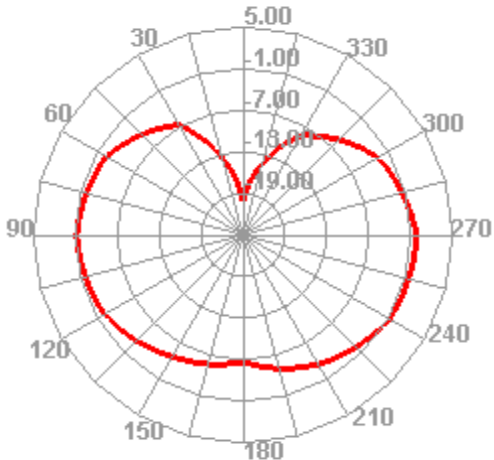


820.000MHz E1

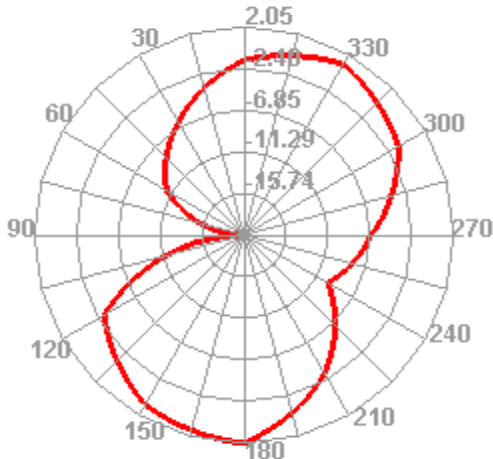


820.000MHz E2

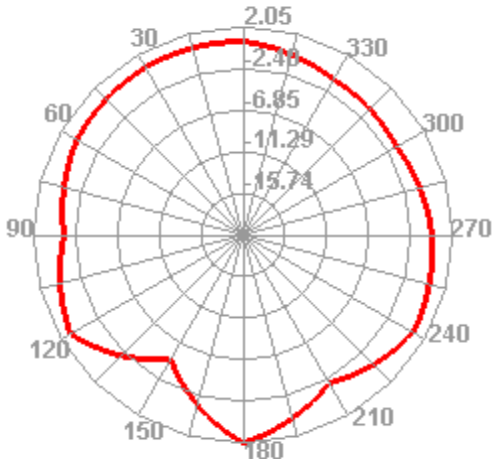

960.000MHz

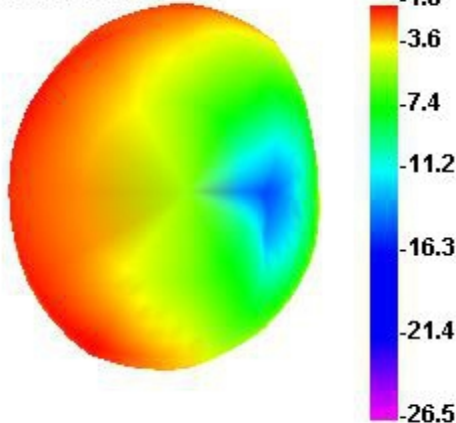


960.000MHz H

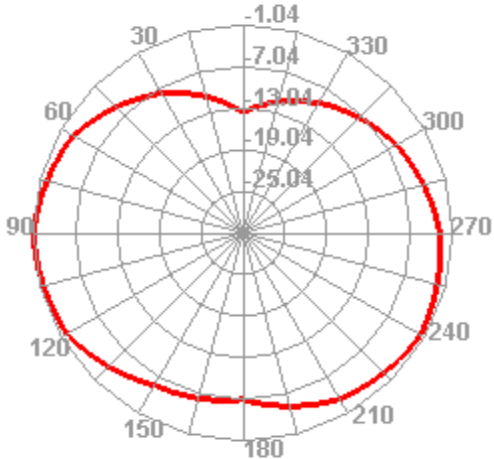


KLS electronic	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	7 / 18


960.000MHz E1

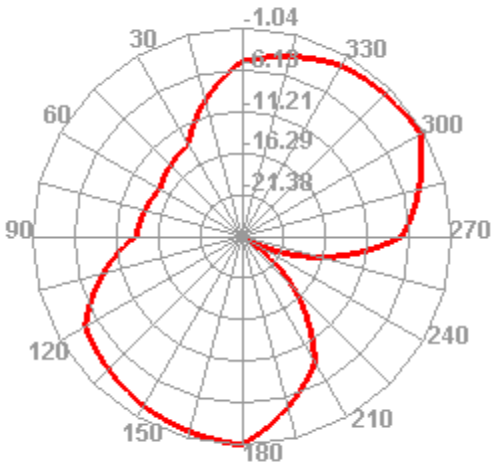


960.000MHz E2

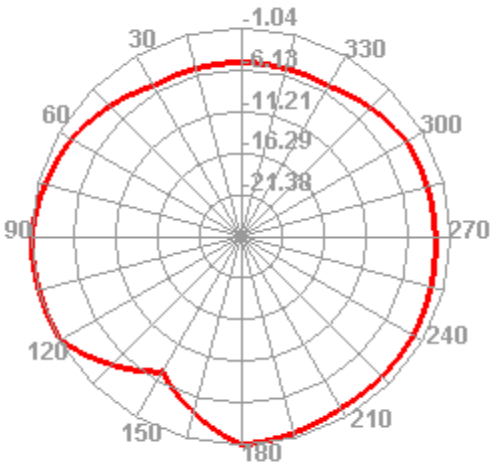


1710.000MHz

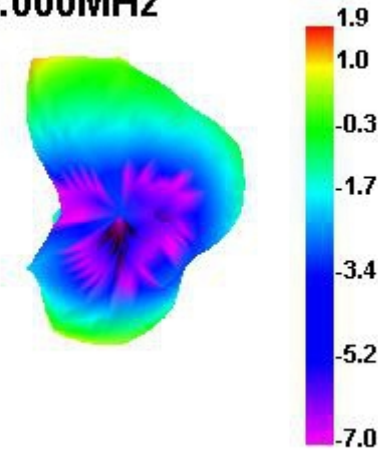


1710.000MHz H

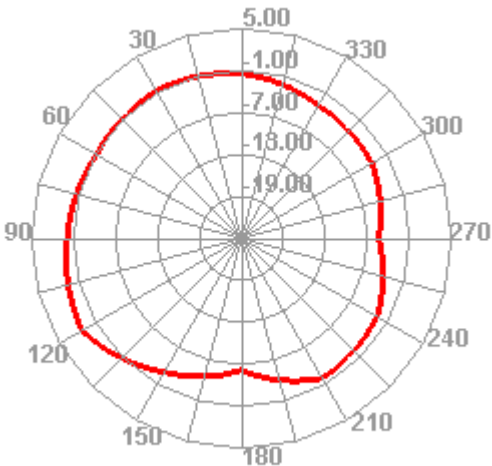

1710.000MHz E1

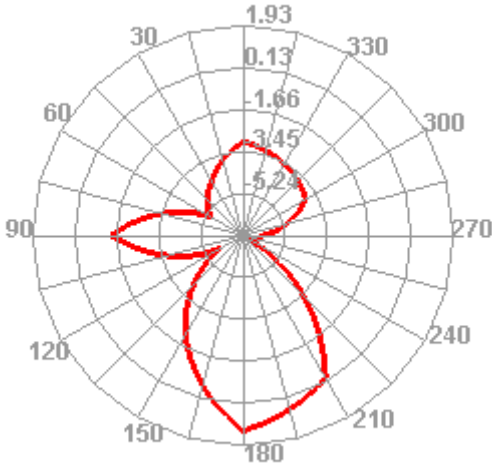


1710.000MHz E2

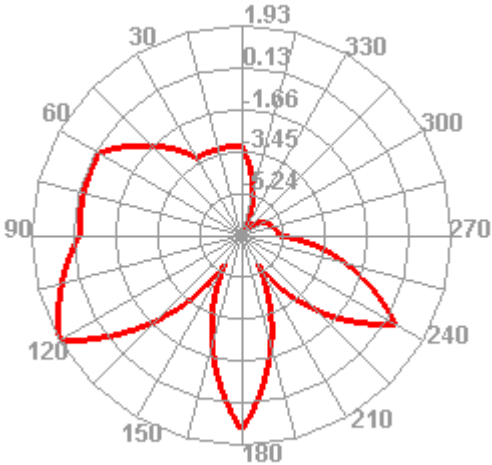


KLS electronic	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	8 / 18


2170.000MHz

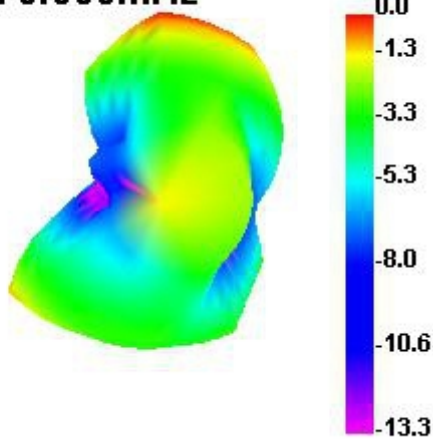


2170.000MHz H

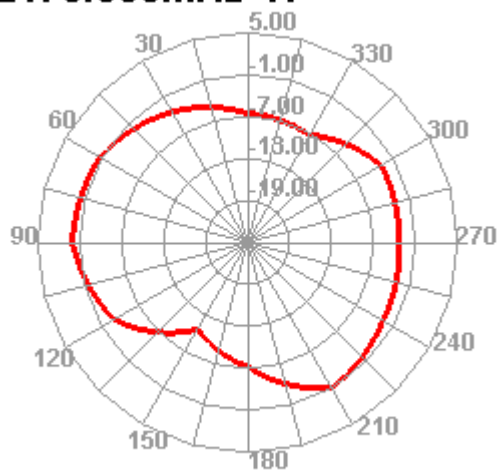


2170.000MHz E1

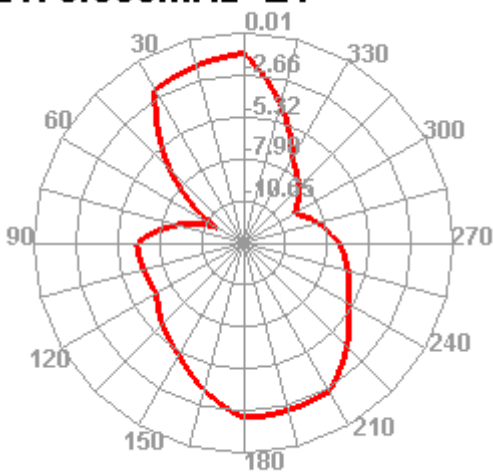


2170.000MHz E2

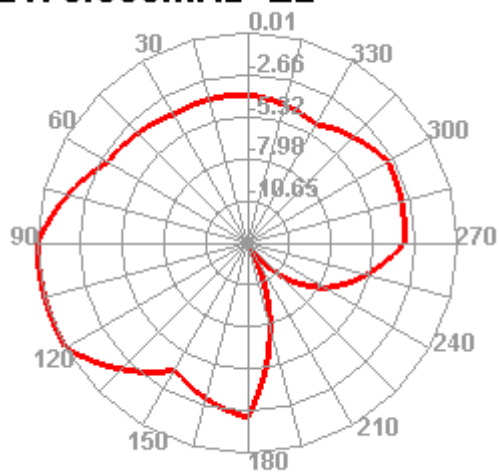

2300.000MHz

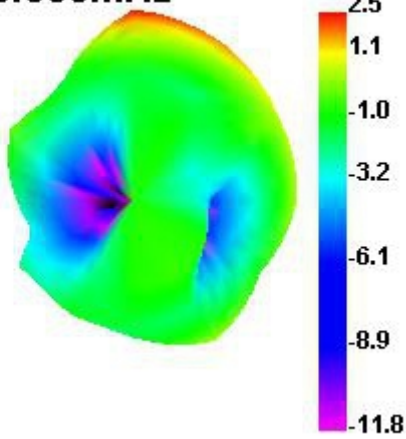


2300.000MHz H

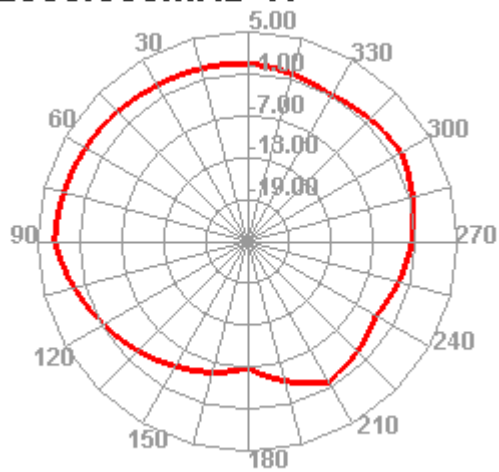


KLS electronic	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	9 / 18


2300.000MHz E1

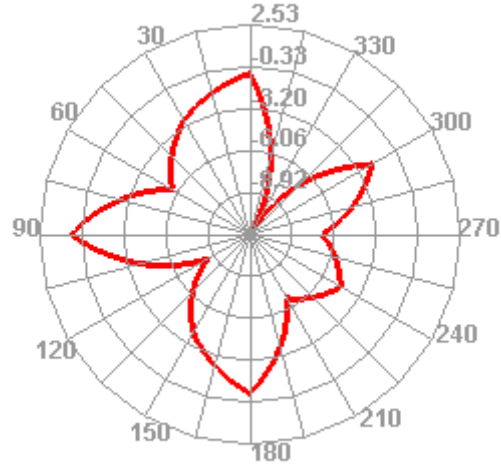


2300.000MHz E2

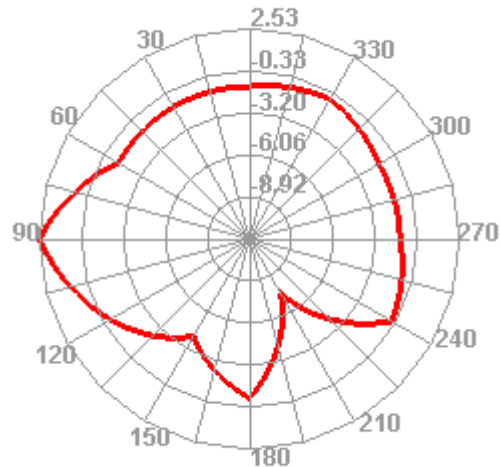


2690.000MHz

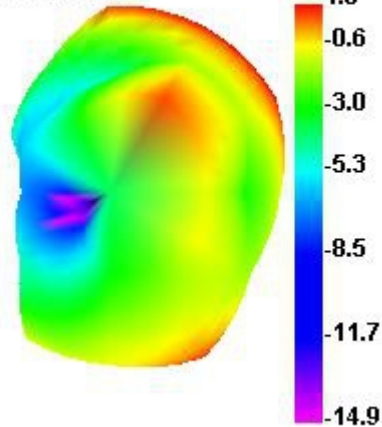


2690.000MHz H

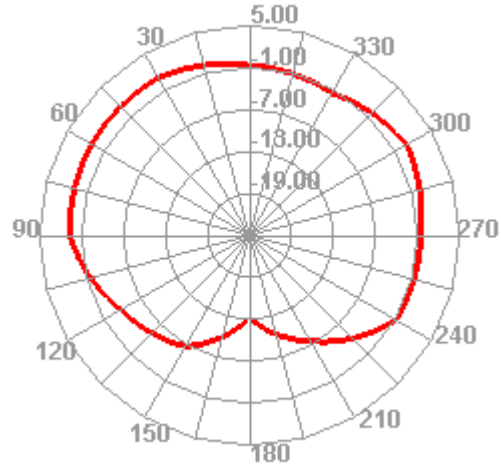

2690.000MHz E1

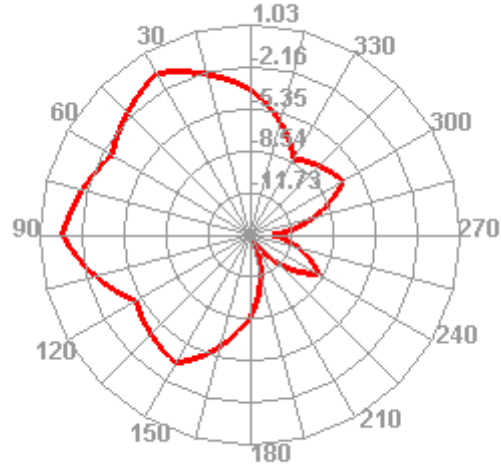

2690.000MHz E2

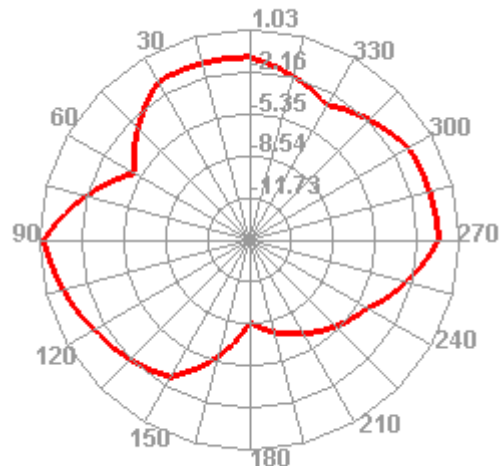


	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	10 / 18

4. Schematic symbol and Pin definition

The pin assignment for the L-KLS1-LTE-F-SMD35*8.5*03 antenna are as follows. The antenna has 16 pins and only two work. All other pins are designed for mechanical strength.

All other pins are used for mechanical strength.

Only two work. All other pins are of mechanical strength.

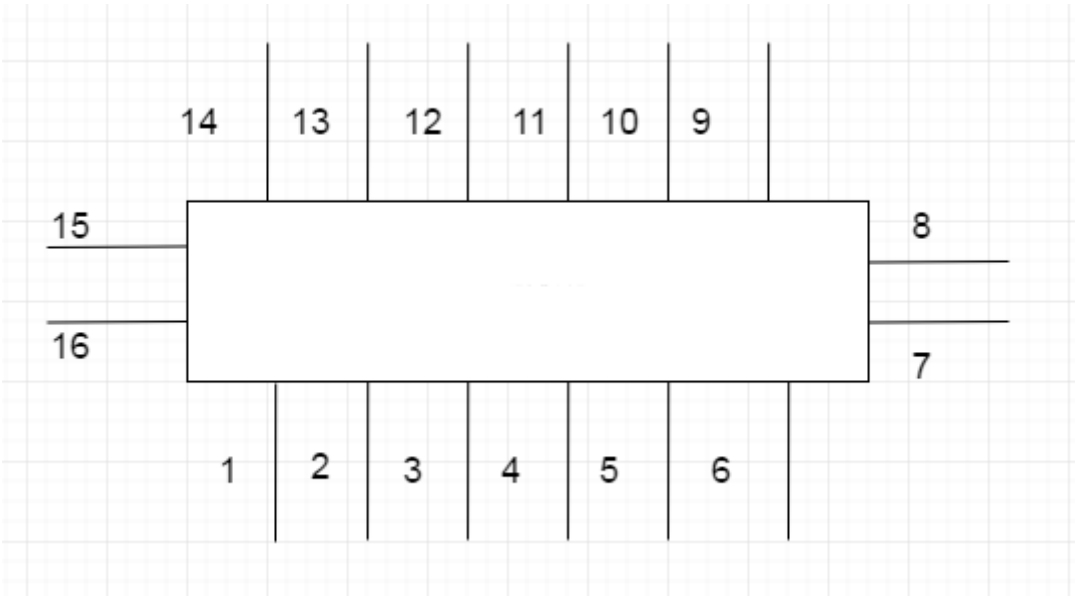


Pin No.	Description
3	Feed
4	Return/GND
1,2,5,6,7,8,9,10,11,12,13,14,15,16	Not used (Mechanical only)

	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	11 / 18

5. Transmission Line


The characteristic impedance of all transmission lines shall be designed as 50 Ω .

- The length of the transmission lines should be kept to as short as possible
- Any other part of the RF system, such as transceiver, power amplifiers, etc., shall also be designed with an impedance of 50 Ω

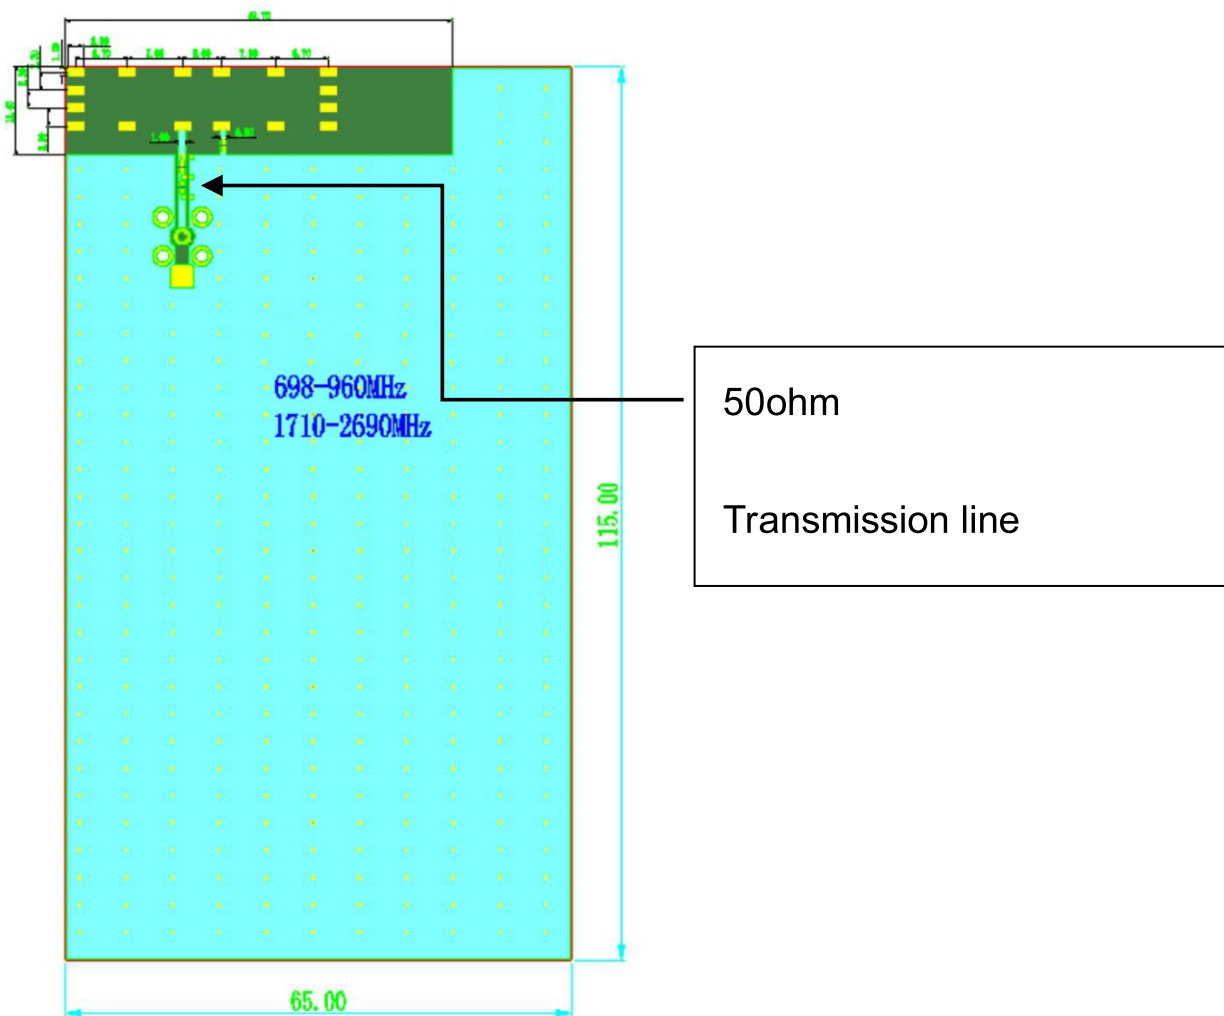


	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	12 / 18

6. Matching circuit

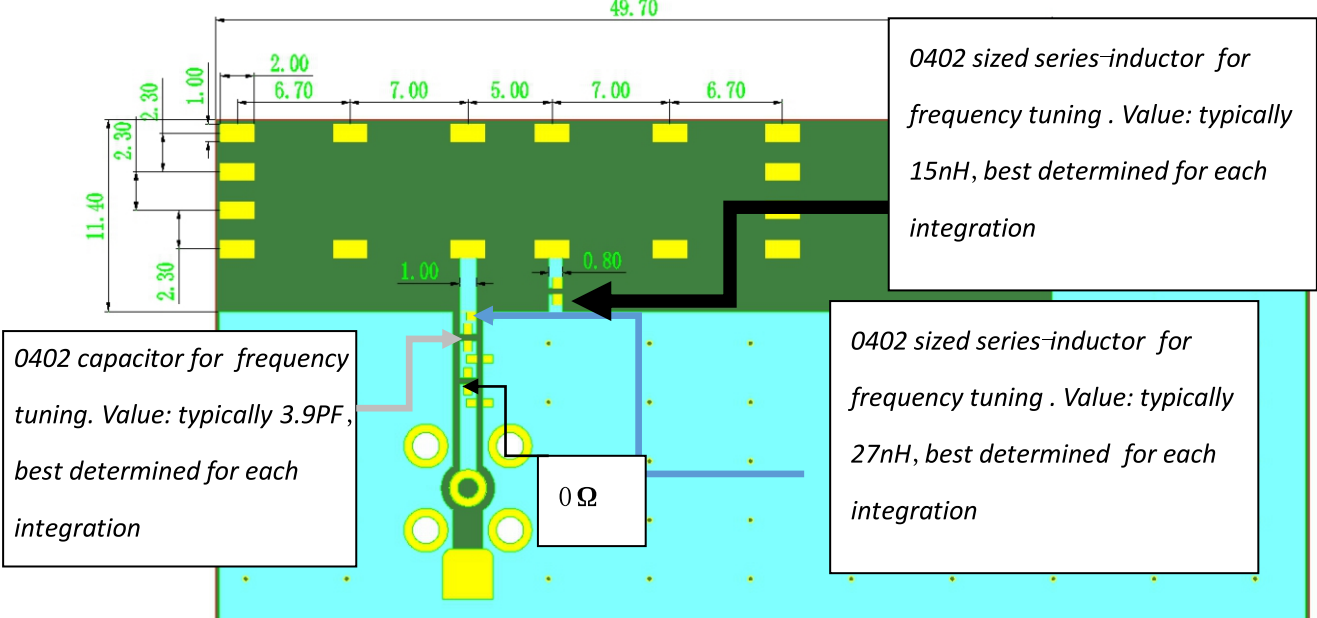

The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to six components and the following circuit should be designed into the host PCB. Not all components may be required but should be included as a precaution. The matching network must be placed close to the antenna feed to ensure it is more effective in tuning the antenna.

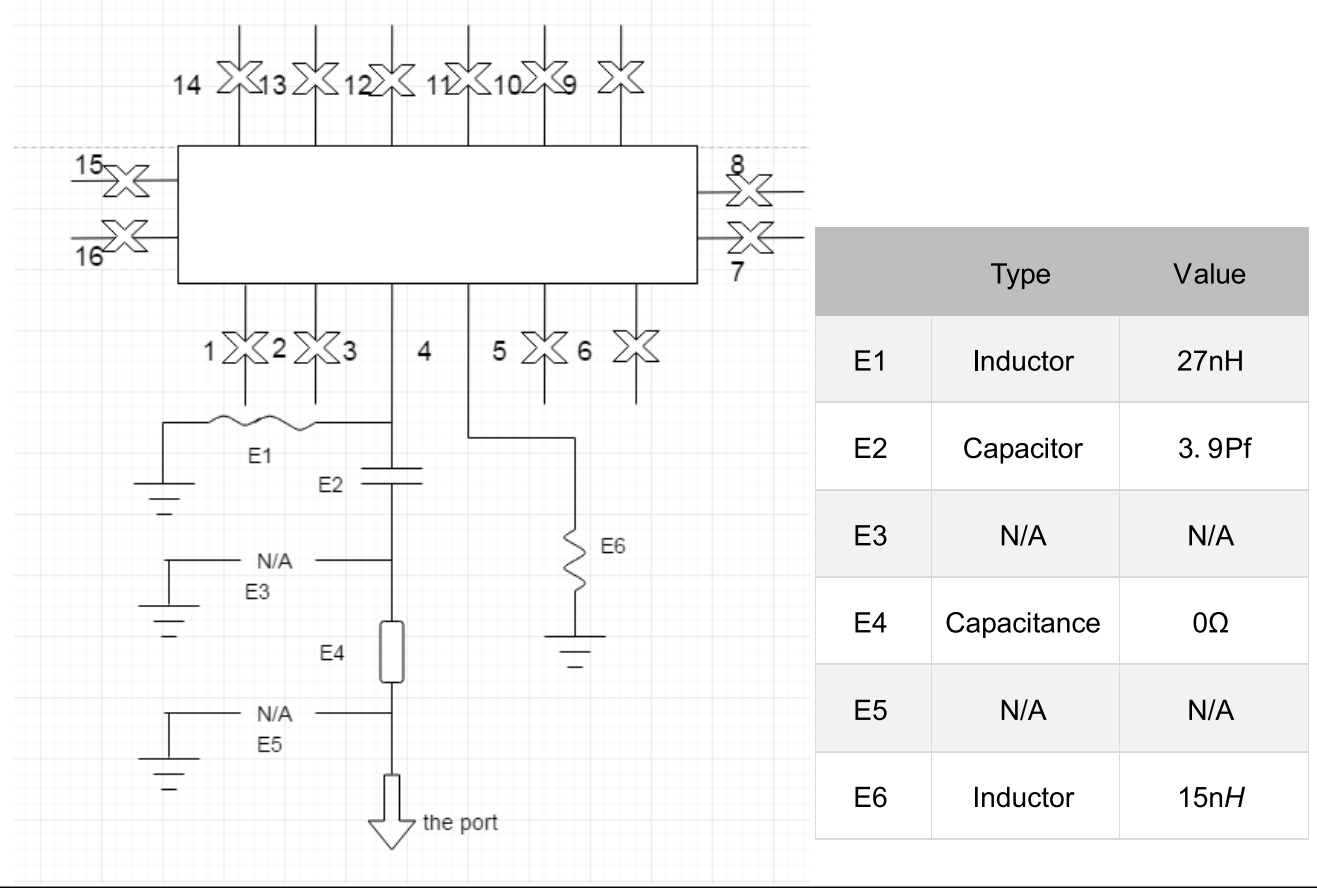


	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	13 / 18

7. Host PCB Requirement


The printed circuit board of the host must ensure that the antenna clearance area meets the antenna specifications. It is suggested that putting the antenna in the corner of the PCB.

An example of a PCB layout shown as below:

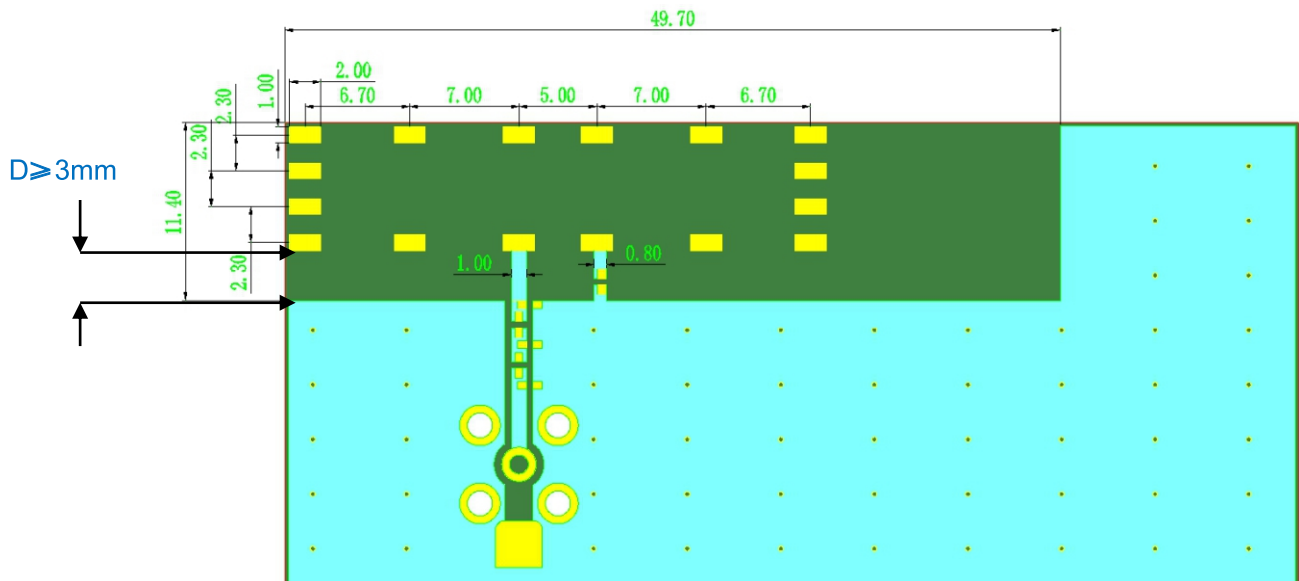

Gap D is required from the edge of the antenna to the ground plane. This should be maintained along the edge of the antenna placement, **minimum value is 3mm**.

Gap E is required from the edge of the antenna to the ground plane or PCB traces, **minimum value is 15mm**.

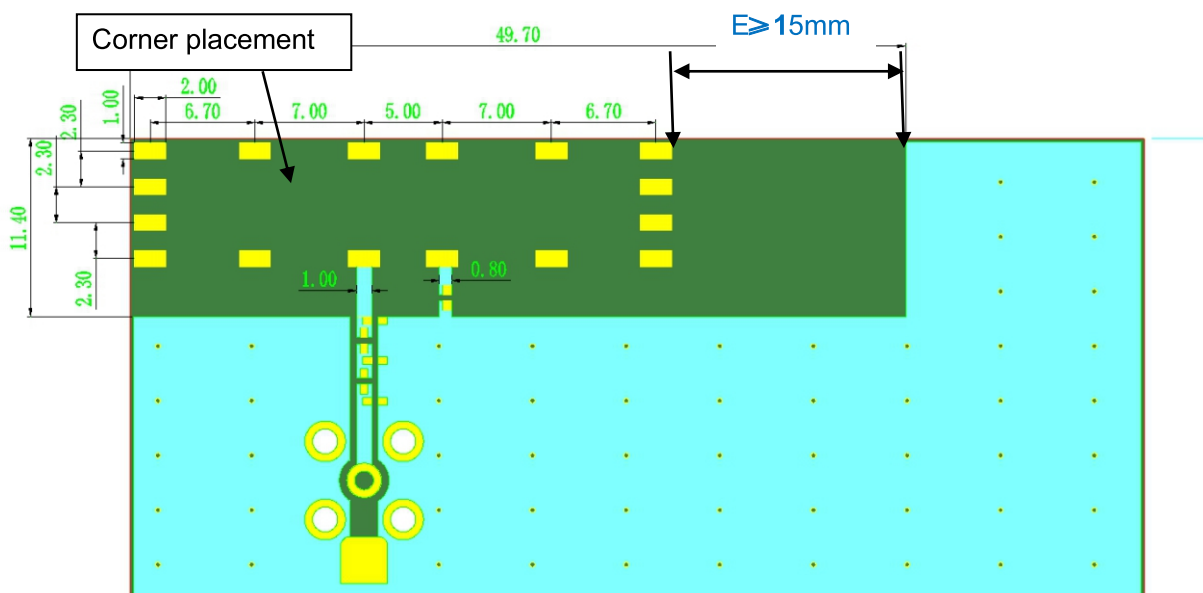


	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	14 / 18


8. Host PCB Size

The performance of the low frequency section depends on the length of the ground plane.
Reducing GND length will directly impact on the performance of low frequency band.



Take antenna efficiency measurement results on different GND sizes as an example:

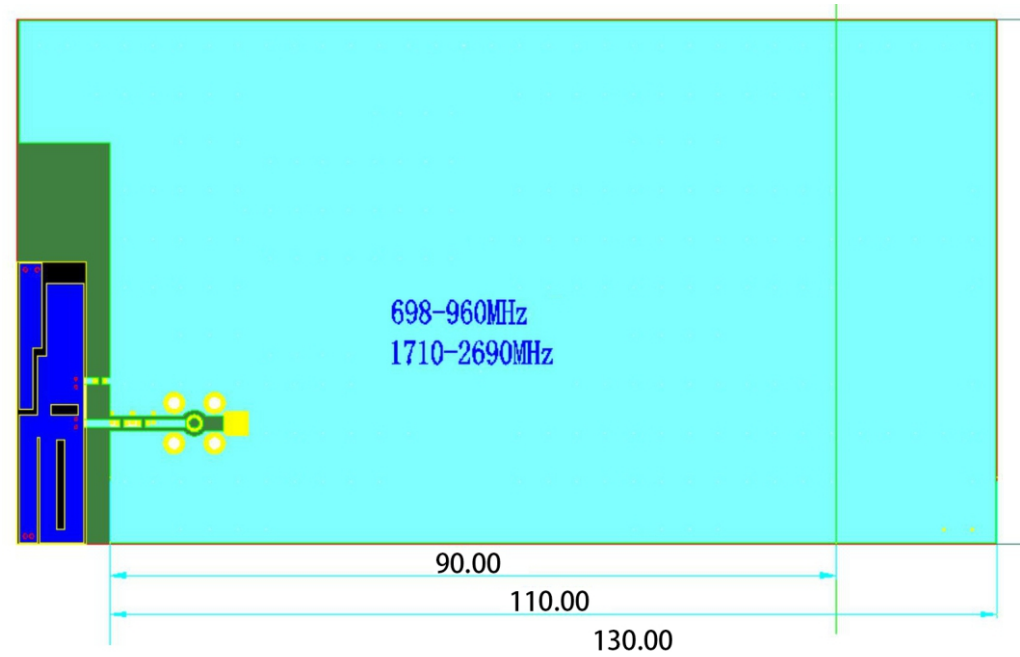

	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	15 / 18

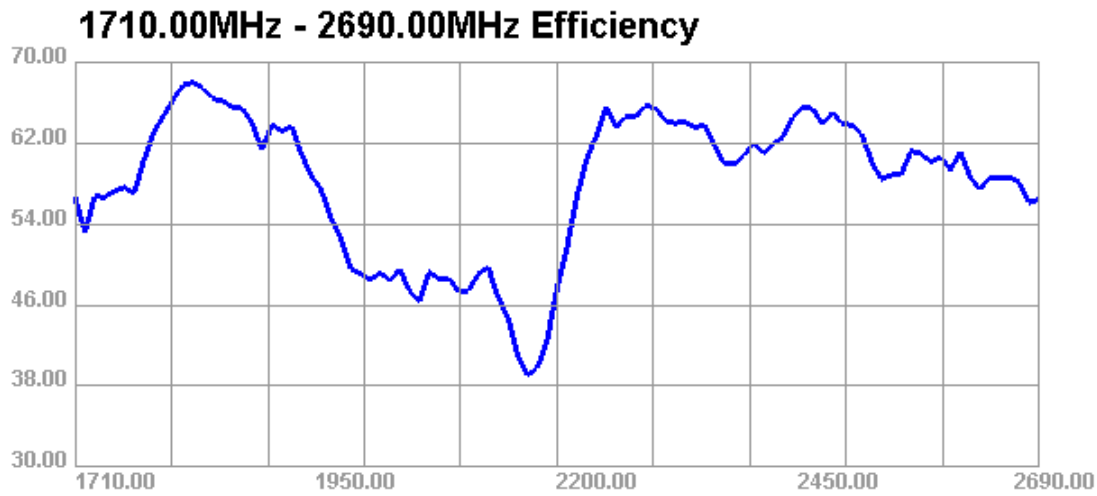


☐ Board length 90mm

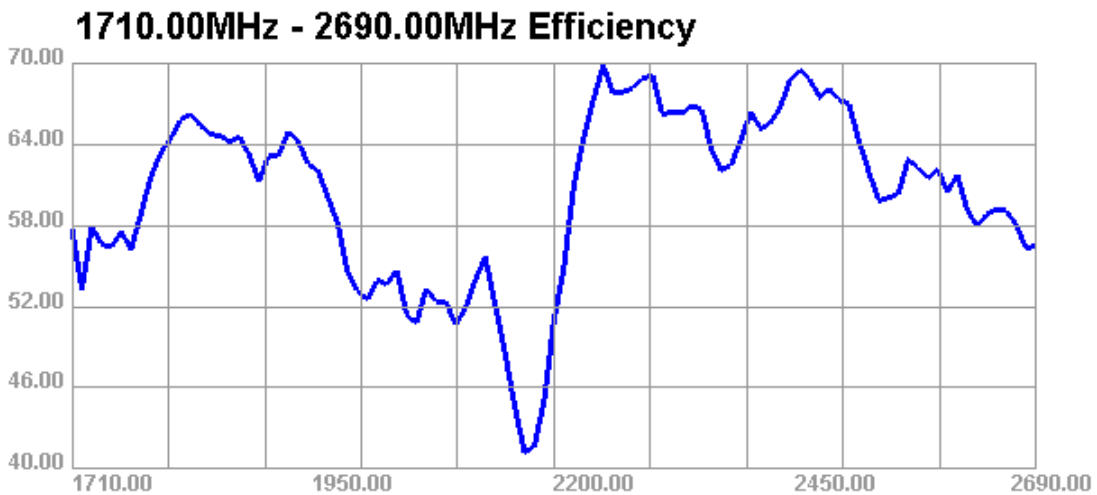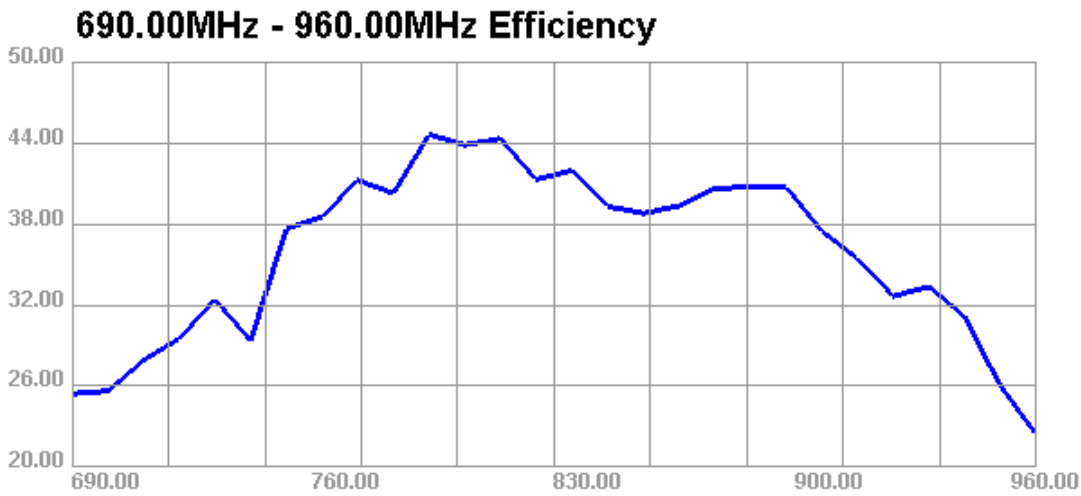

	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	16 / 18

☐ Board length 130mm

690.00MHz - 960.00MHz Efficiency

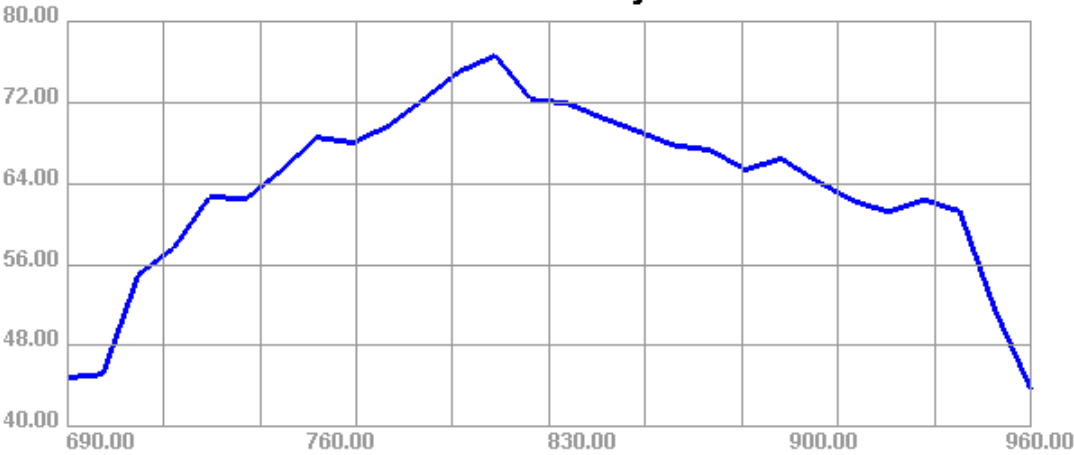


1710.00MHz - 2690.00MHz Efficiency



	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	17 / 18

9. Antenna Drawings

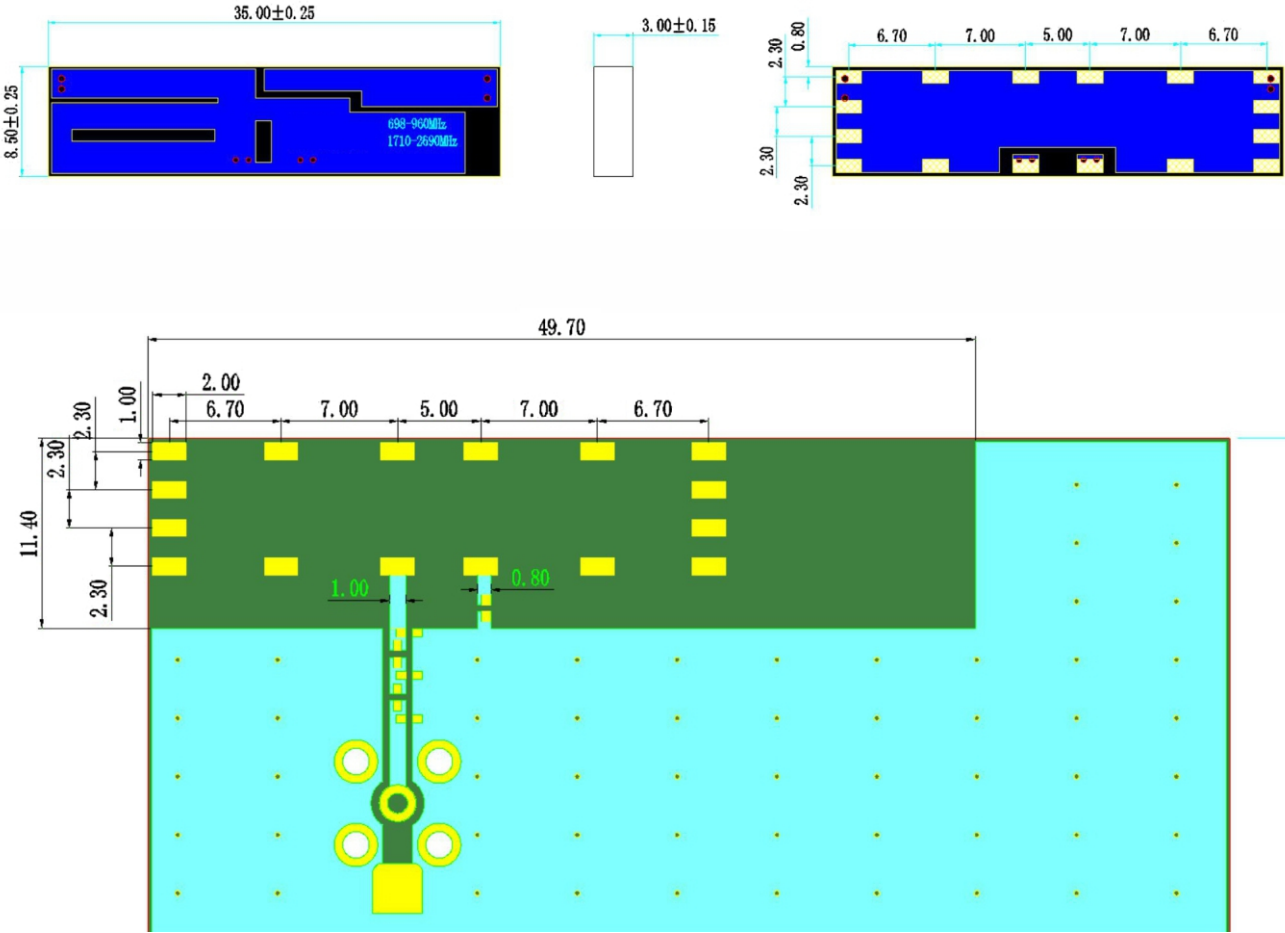

	Part name	35*8.5*3 mm ³ SMD Antenna	Date	2025-08-14
	Part number	L-KLS1-LTE-F-SMD35*8.5*03	Edition	V1
	Department		Page	18 / 18

10. Soldering Temperature

PHASE	PROFILE FEATURES	PB-Free Assembly(max.)
RAMP-UP	Avg.Ramp-up Rate(T smax to Tp)	3°C/second(max.)
PREHEAT	Temperature Min(Tsmin)	150°C
	Temperature Max(T smax)	180°C
	Time(tsmin to tsmax)	120seconds max
REFLOW	Temperature(TL)	210°C
	Total Time above TL(tl)	50seconnds max
PEAK	Temperature(Tp)	260°C
	Time(tp)	10seconnds max
RAMP-DOWN	Rate	5°C/second max

11. Reflow Profile

