

connectors industrial circular Series

KLS15-225-M16 Connectors Industrial Circular Series

Safety approval: UL Water proof IP $\geq$ 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

Rated current: 2-4P: 7A

5P: 5A

6-10P: 4A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage: 1500 VAC

Insulation resistance: 2000M Ω DC 500V

Contact resistance: 10 m Ω DC1A

Solder cup mouth diameter: 2~4P: 1.6 mm

5P: 1.2 mm

6~10P: 0.9 mm


Solder diameter: 2-4P: 2.45 mm

5P: 2 mm

6-10P: 1.15 mm



Plug IP55

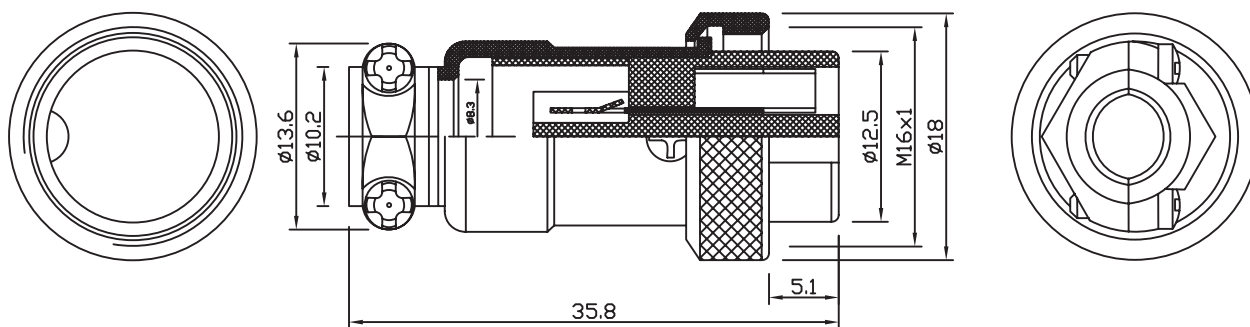

ORDER INFORMATION

Product No.: KLS15-225-M16-2 F1

Pos. No. _____

Dental regulations: M16 _____

Number of Contacts: 2, 3, 4, 5, 6, 7, 8, 9, 10P _____

2P	3P	4P	5P	6P
7P	8P	9P	10P	

TYPE Ordering



connectors industrial circular Series

KLS15-225-M16 Connectors Industrial Circular Series

Safety approval: UL Water proof IP $\geq$ 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

Rated current: 2-4P: 7A

5P: 5A

6-10P: 4A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage: 1500 VAC

Insulation resistance: 2000M Ω DC 500V

Contact resistance: 10 m Ω DC 1A

Solder cup mouth diameter: 2~4P: 1.6 mm

5P: 1.2 mm

6~10P: 0.9 mm


Solder diameter: 2-4P: 2.45 mm

5P: 2 mm

6-10P: 1.15 mm



Male cable connecting plug IP55

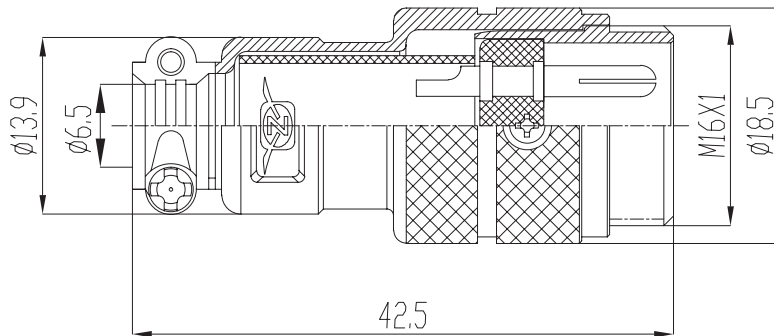

ORDER INFORMATION

Product No.: KLS15-225-M16-2 F2

Pos. No. _____

Dental regulations: M16 _____

Number of Contacts: 2, 3, 4, 5, 6, 7, 8, 9, 10P _____

2P	3P	4P	5P	6P
7P	8P	9P	10P	

TYPE Ordering



connectors industrial circular Series

KLS15-225-M16 Connectors Industrial Circular Series

Safety approval: UL Water proof IP $\geq$ 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

Rated current: 2~4P: 7A

5P: 5A

6~10P: 4A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage: 1500 VAC

Insulation resistance: 2000M Ω DC 500V

Contact resistance: 10 m Ω DC 1A

Solder cup mouth diameter: 2~4P: 1.6 mm

5P: 1.2 mm

6~10P: 0.9 mm


Solder diameter: 2~4P: 2.45 mm

5P: 2 mm

6~10P: 1.15 mm



90 degree angled plug IP55

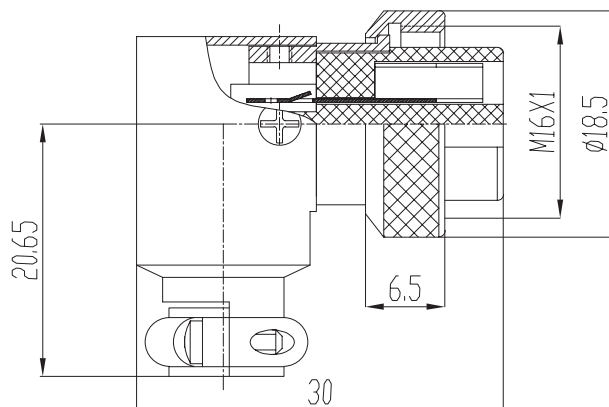

ORDER INFORMATION

Product No.: KLS15-225-M16-2 F3

Pos. No. _____

Dental regulations: M16 _____

Number of Contacts: 2, 3, 4, 5, 6, 7, 8, 9, 10P _____

2P	3P	4P	5P	6P
7P	8P	9P	10P	

TYPE Ordering

F1



F2



F3



M1



M2



M3



M4



connectors industrial circular Series

KLS15-225-M16 Connectors Industrial Circular Series

Safety approval: UL Water proof IP≥55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

Rated current: 2~4P: 7A

5P: 5A

6~10P: 4A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage: 1500 VAC

Insulation resistance: 2000MΩ DC 500V

Contact resistance: 10 mΩ DC1A

Solder cup mouth diameter: 2~4P: 1.6 mm

5P: 1.2 mm

6~10P: 0.9 mm



Solder diameter: 2~4P: 2.45mm

5P: 2 mm

6~10P: 1.15mm



Socket IP55

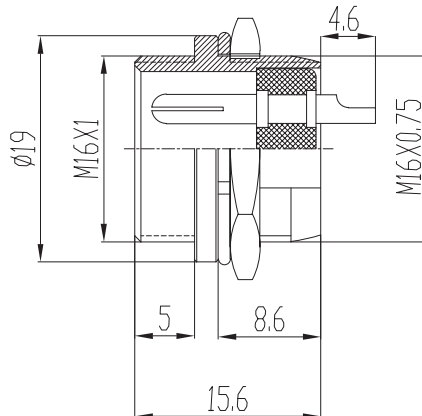

ORDER INFORMATION

Product No.: KLS15-225-M16-2 M1

Pos. No. _____
Dental regulations: M16 _____
Number of Contacts: 2, 3, 4, 5, 6, 7, 8, 9, 10P

2P	3P	4P	5P	6P
7P	8P	9P	10P	

TYPE Ordering



connectors industrial circular Series

KLS15-225-M16 Connectors Industrial Circular Series

Safety approval: UL Water proof IP $\geq$ 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

Rated current: 2~4P: 7A

5P: 5A

6~10P: 4A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage: 1500 VAC

Insulation resistance: 2000M Ω DC 500V

Contact resistance: 10 m Ω DC 1A

Solder cup mouth diameter: 2~4P: 1.6 mm

5P: 1.2 mm

6~10P: 0.9 mm



Solder diameter: 2~4P: 2.45mm

5P: 2 mm

6~10P: 1.15mm



Socket IP55

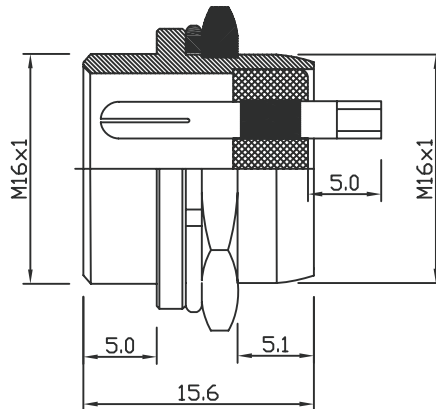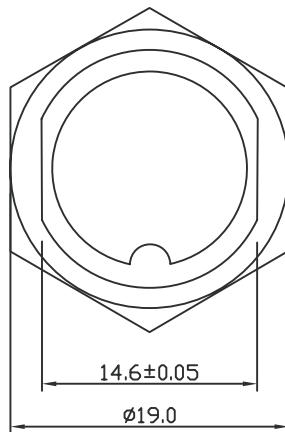

ORDER INFORMATION

Product No.: KLS15-225-M16-2 M1-A

Pos. No. _____
Dental regulations: M16 _____
Number of Contacts: 2, 3, 4, 5, 6, 7, 8, 9, 10P

2P	3P	4P	5P	6P
7P	8P	9P	10P	

Thread Specification M16x1
TYPE Ordering



connectors industrial circular Series

KLS15-225-M16 Connectors Industrial Circular Series

Safety approval: UL Water proof IP $\geq$ 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

Rated current: 2~4P: 7A

5P: 5A

6~10P: 4A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage: 1500 VAC

Insulation resistance: 2000M Ω DC 500V

Contact resistance: 10 m Ω DC 1A

Solder cup mouth diameter: 2~4P: 1.6 mm

5P: 1.2 mm

6~10P: 0.9 mm


Solder diameter: 2~4P: 2.45mm

5P: 2 mm

6~10P: 1.15mm



Single milling face male socket IP55

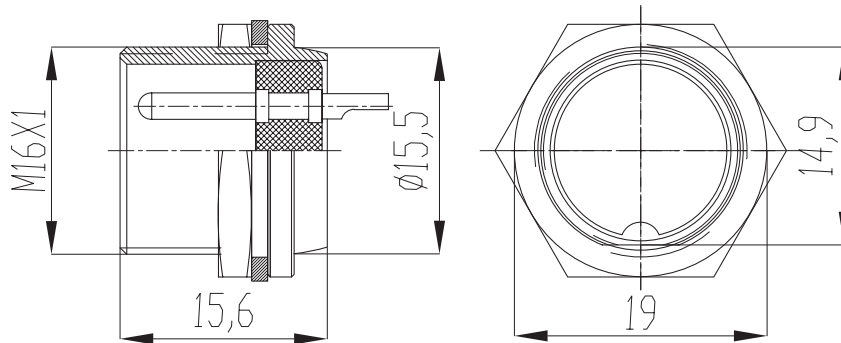

ORDER INFORMATION

Product No.: KLS15-225-M16-2 M2

Pos. No. _____
Dental regulations: M16 _____
Number of Contacts: 2, 3, 4, 5, 6, 7, 8, 9, 10P _____

2P	3P	4P	5P	6P
7P	8P	9P	10P	

TYPE Ordering



connectors industrial circular Series

KLS15-225-M16 Connectors Industrial Circular Series

Safety approval: UL Water proof IP $\geq$ 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

Rated current: 2-4P: 7A

5P: 5A

6-10P: 4A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage: 1500 VAC

Insulation resistance: 2000M Ω DC 500V

Contact resistance: 10 m Ω DC1A

Solder cup mouth diameter: 2~4P: 1.6 mm

5P: 1.2 mm

6~10P: 0.9 mm


Solder diameter: 2-4P: 2.45 mm

5P: 2 mm

6-10P: 1.15 mm



Square flange socket IP55

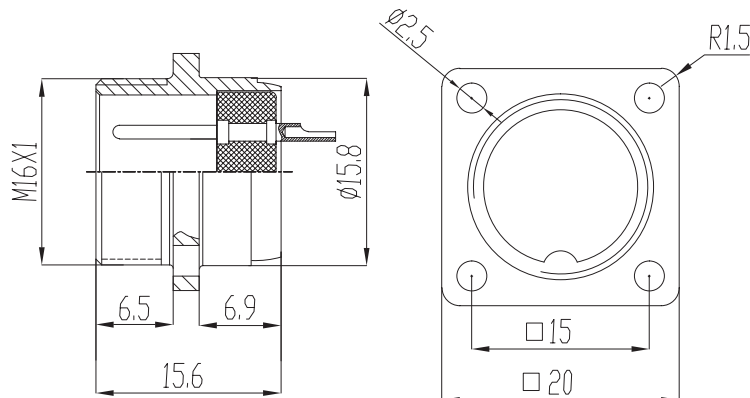

ORDER INFORMATION

Product No.: KLS15-225-M16-2 M3

Pos. No. _____
Dental regulations: M16 _____
Number of Contacts: 2、3、4、5、6、7、8、9、10P _____

2P	3P	4P	5P	6P
7P	8P	9P	10P	

TYPE Ordering



connectors industrial circular Series

KLS15-225-M16 Connectors Industrial Circular Series

Safety approval: UL Water proof IP $\geq$ 55
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

Electrical Characteristics:

Rated current: 2~4P: 7A

5P: 5A

6~10P: 4A

Rated Voltage: 125V

Operation Voltage: 200 VAC

Withstanding Voltage: 1500 VAC

Insulation resistance: 2000M Ω DC 500V

Contact resistance: 10 m Ω DC 1A

Solder cup mouth diameter: 2~4P: 1.6 mm

5P: 1.2 mm

6~10P: 0.9 mm


Solder diameter: 2~4P: 2.45mm

5P: 2 mm

6~10P: 1.15mm



Three eye flange socket IP55

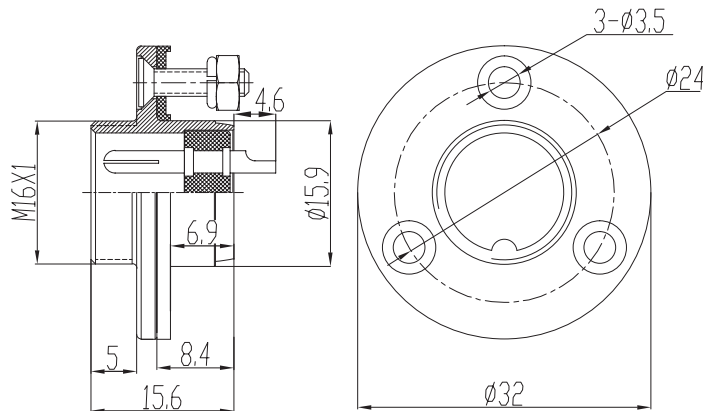

ORDER INFORMATION

Product No.: KLS15-225-M16-2 M4

Pos. No. _____
Dental regulations: M16 _____
Number of Contacts: 2, 3, 4, 5, 6, 7, 8, 9, 10P

2P	3P	4P	5P	6P
7P	8P	9P	10P	

TYPE Ordering

