

Product Specification

Number: L-KLS1-5G-F-SMD42.2*10.3*1.6

Name: 42.2*10.3*1.6 mm³
SMD Antenna

Customer: _____

Date: 2025-08-20

Customer Signature:



NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

**ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.**

Compi	Check	Review	Approva
Jenny	Jack.C		

Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
Department		Page	2 / 15



Features:

- ☐ Frequency bands from 610~6000MHz .
- ☐ SMD Compliant.
- ☐ Impedance 50 Ohm.
- ☐ Antenna for 5G / 4G / 3G/ 2G applications including MIMO systems
- ☐ Size: 42*10*1.6mm

Applications:

- ☐ Application of 5G/4G/3G/2G equipment.
- ☐ LTE ,NB-Iot, Cat M1,.
- ☐ Portable Devices.
- ☐ Remote monitoring.
- ☐ Network Devices.
- ☐ Wearable devices.
- ☐ Autonomous/UAVs
- ☐ Smart Metering
- ☐ Payment Terminals

1. Electrical Specifications

Cable 1 Parameters

Standards	5G&4G&3G&2G		
Frequency range (MHz)	610~960MHz	1400~2700MHz	3000~6000MHz
Peak Gain (dBi)	-1.5~2.7	0.0~7.5	0.2~6.0
Average Gain (dB)	-5.0~-1.0	-5.1~-1.7	-5.2~-1.5
VSWR	3.0	5.5	4.0
Return Loss(dB)	-5.0	-3.0	-5.0
Efficiency (%)	31.4~77.9	30.0~68.2	30.5~70.9
Polarization mode	Linear	Linear	Linear
Radiation pattern	Omni-Directional	Omni-Directional	Omni-Directional
Output impedance (Ω)	50	50	50
Max. Input Power(W)	5	5	5

Note:

All parameters are measured with KLS's EVK which size is 145.0*42.3mm

2. Mechanical and Environmental Specification

Mounting Type	SMD
Antenna size(mm)	42.2 (L) x10.3 (W) x 1.6 (H)
Material	PCB
Operating Temperature (°C)	- 40 °C ~ + 85 °C
Storage Temperature(°C)	- 40 °C ~ + 85 °C

3. Antenna parameters

5G&4G&3G&2G(Board length 145mm)


3.1 General Data

FRE (MHz)	610	820	960	1400	2170	2690	3000	4000	5000	6000
VSWR	1.7	2.9	2.2	5.4	2.4	1.2	2.6	2.0	1.7	2.2
Return Loss	-12.7	-6.3	-8.7	-3.3	-7.6	-23.4	-7.1	-9.9	-11.4	-8.5
Eff (%)	34.9	41.5	63.1	30.0	59.2	59.8	64.0	57.9	63.6	35.4
Average	-4.6	-3.8	-2.0	-5.1	-2.3	-2.2	-1.9	-2.4	-2.0	-4.5

3.2 VSWR




3.3 Return Loss

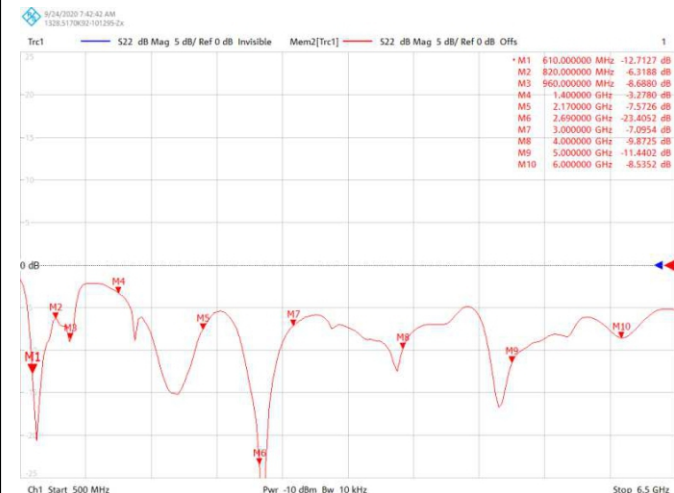


Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
Department		Page	5 / 15

3.4 Efficiency


610.00MHz - 960.00MHz Efficiency

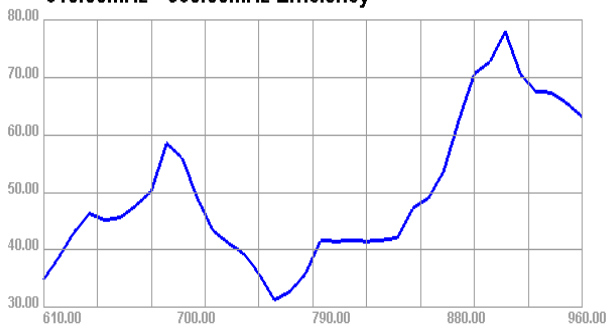

1400.00MHz - 2700.00MHz Efficiency

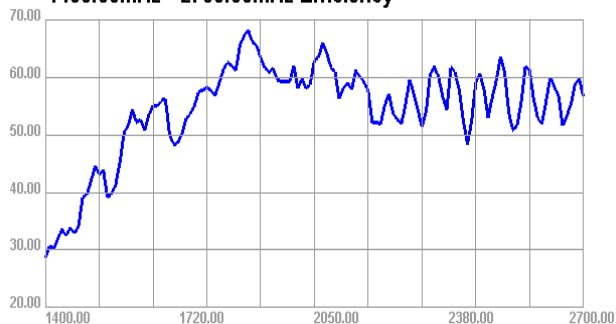


3000.00MHz - 6000.00MHz Efficiency

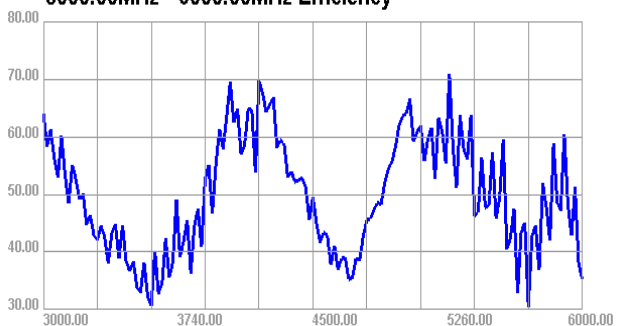


3.5 Gain


610.00MHz - 960.00MHz Gain

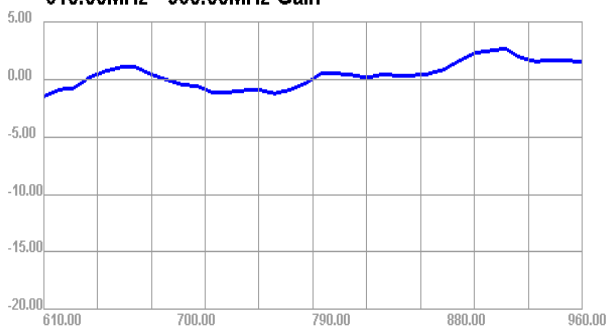


1400.00MHz - 2700.00MHz Gain

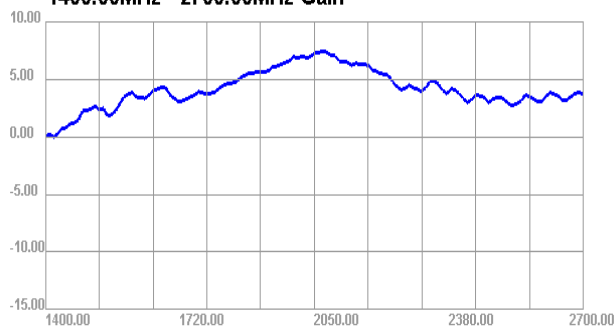


3000.00MHz - 6000.00MHz Gain

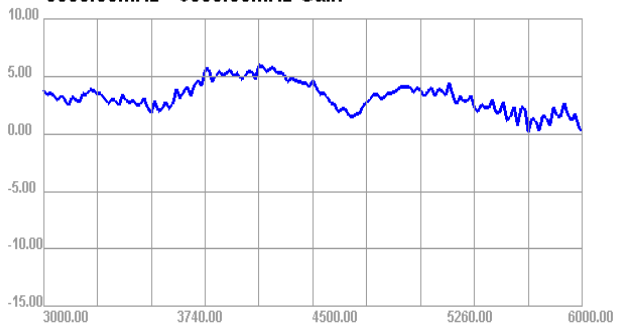


3.6 Directional pattern

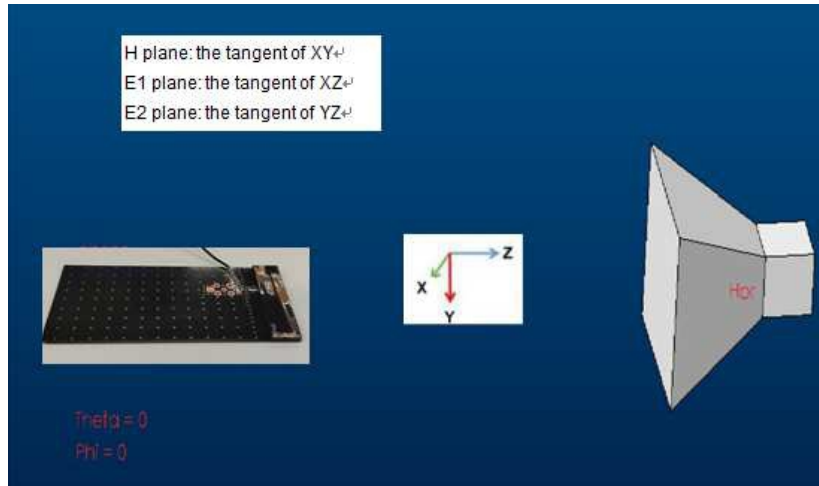


610.000MHz

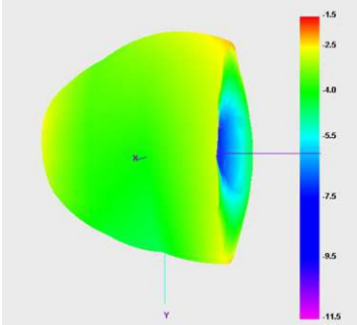


800.000MHz

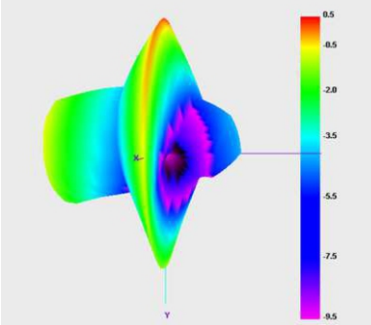


960.000MHz

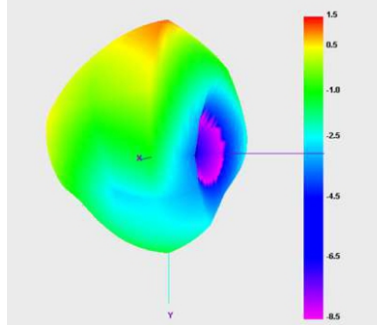


Horizontal




E1 Face




E2 Face




1500.000MHz

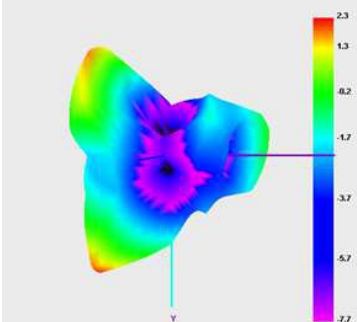

2000.000MHz

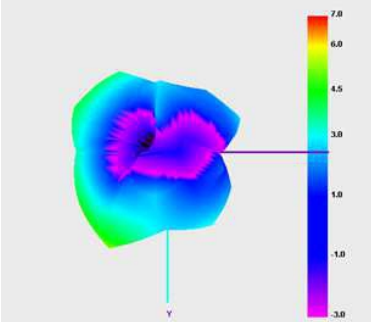


2600.000MHz

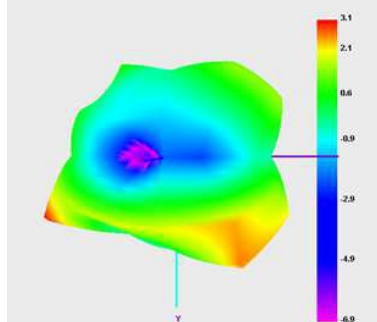


	Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
	Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
	Department		Page	7 / 15


Horizontal

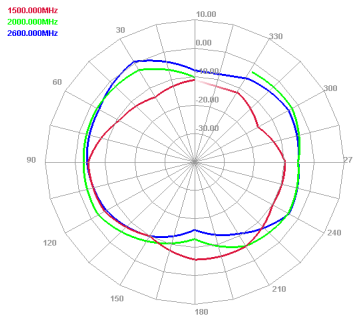


E1 Face

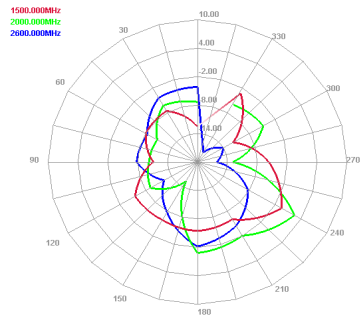


E2 Face

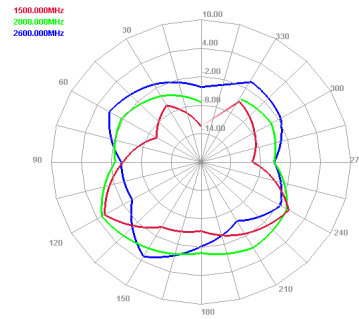


3500.000MHz

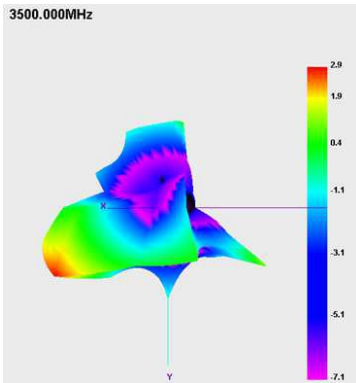


5000.000MHz

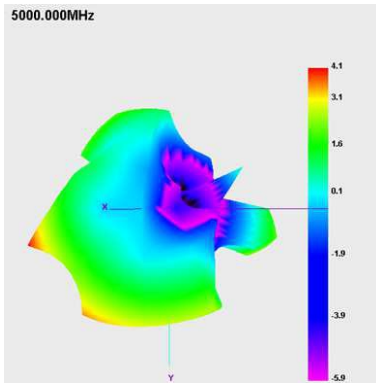


6000.000MHz

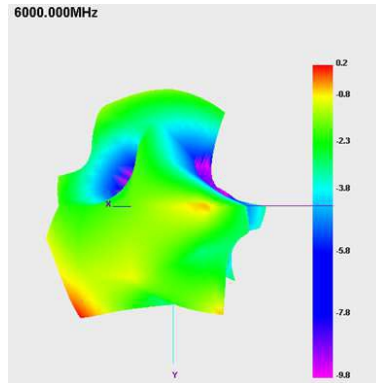


Horizontal

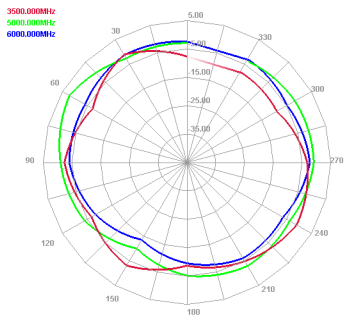

E1 Face

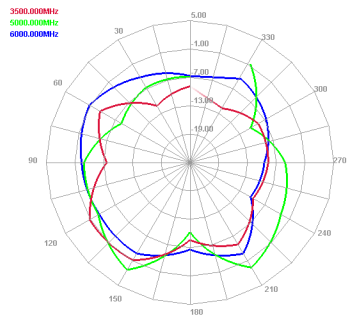

E2 Face

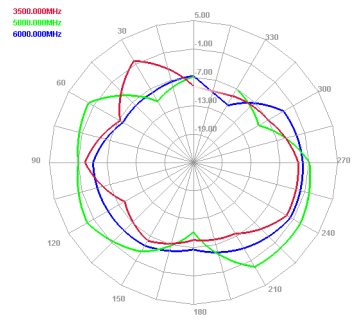


Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
Department		Page	8 / 15

4. Transmission Line

The characteristic impedance of all transmission lines shall be designed as 50 Ω .


- The length of the transmission lines should be kept to as short as possible
- Any other part of the RF system, such as transceiver, power amplifiers, etc., shall also be designed with an impedance of 50 Ω

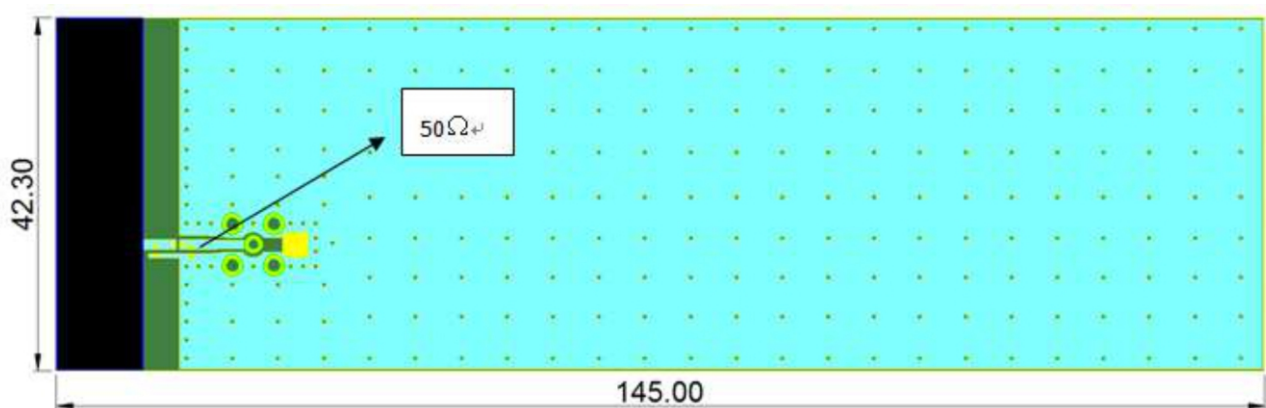

	Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
	Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
	Department		Page	9 / 15

5. Schematic symbol and Pin definition


The pin assignment for the L-KLS1-5G-F-SMD42.2*10.3*1.6 antenna are as follows. The antenna has 3 pins and only one work. All other pins are designed for mechanical strength.

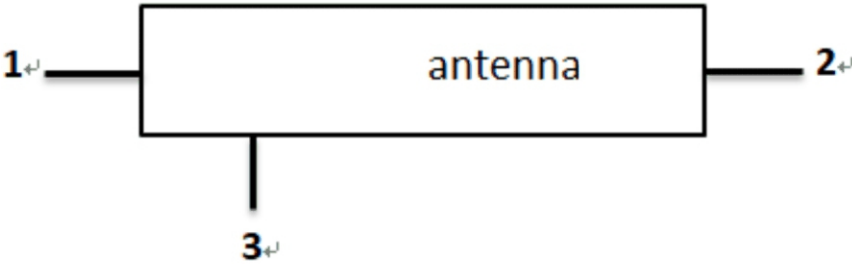


Pin No.	Description
3	Feed
1/2	Not used
	(Mechanical only)

Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
Department		Page	10 /15

6. Matching circuit

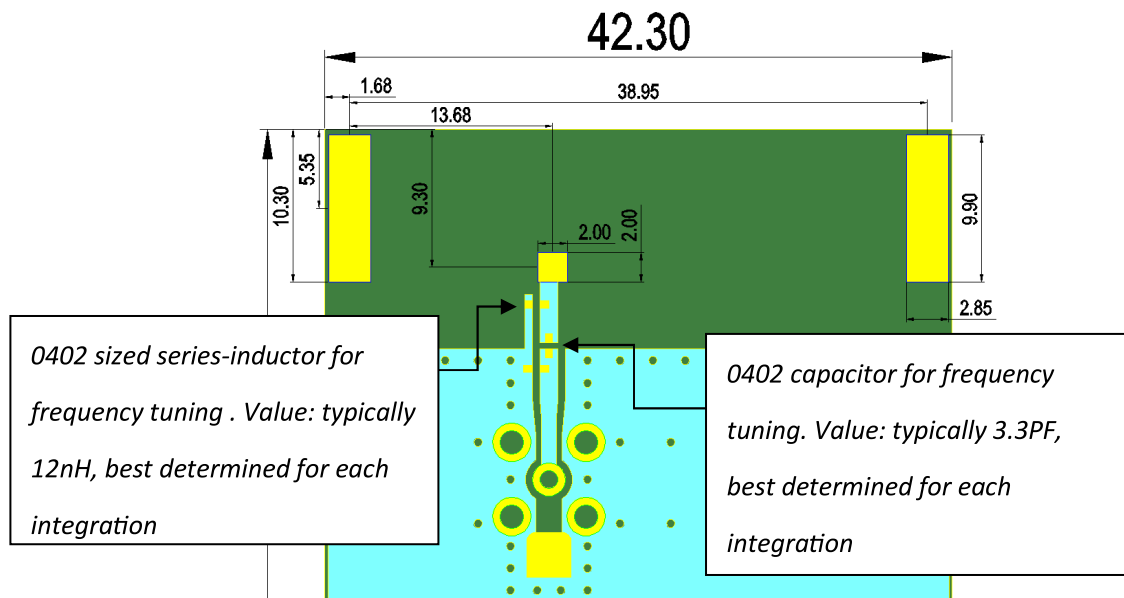

The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to three components and the following circuit should be designed into the host PCB. Not all components may be required but should be included as a precaution. The matching network must be placed close to the antenna feed to ensure it is more effective in tuning the antenna.

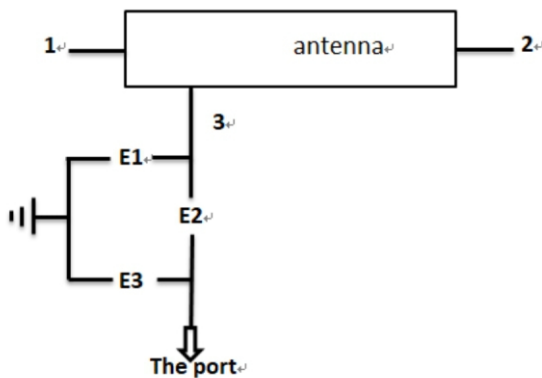


Pin No.	Type	Value
E1	Inductor	12nH
E2	Capacitor	3.3pF
E3	N/A	N/A

7. Host PCB Size

The performance of the low frequency section depends on the length of the ground plane. Reducing GND length will directly impact on the performance of low frequency band.

Take antenna efficiency measurement results on different GND sizes as an example:

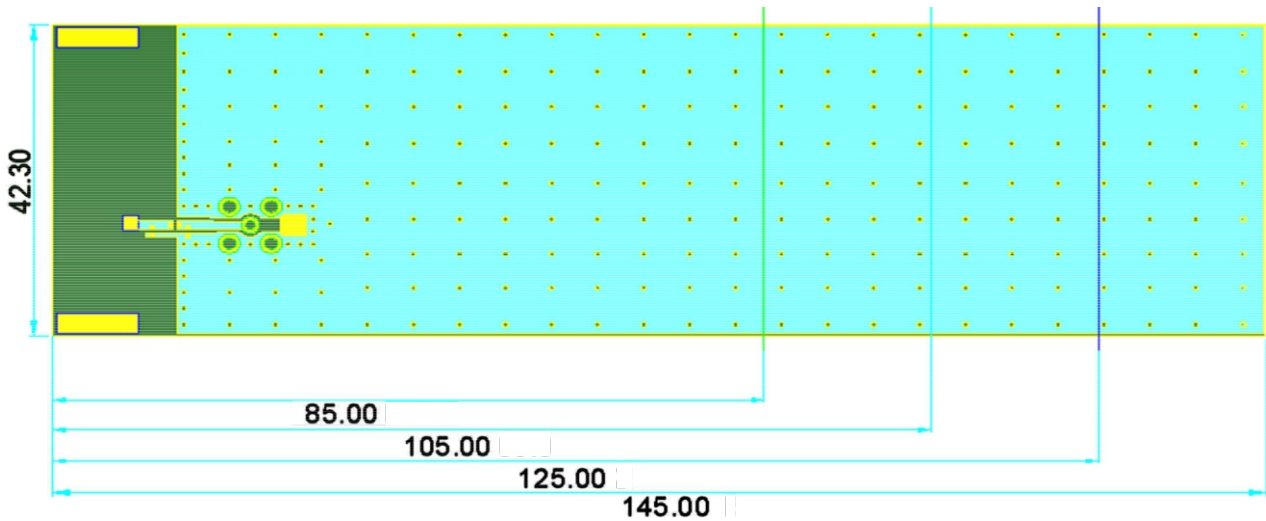


Passive Efficiency vs. PCB length


All results measured in Sunnyway's anechoic chamber

7.1 Board length 145mm


610.00MHz - 960.00MHz Efficiency

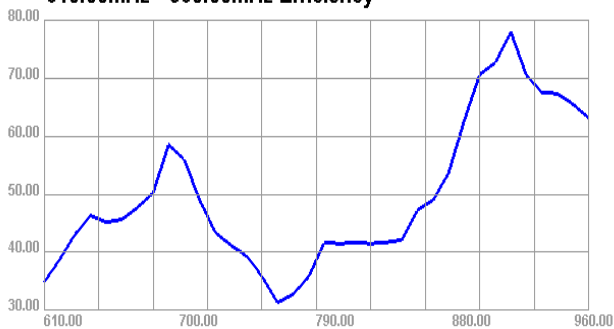

1400.00MHz - 2700.00MHz Efficiency

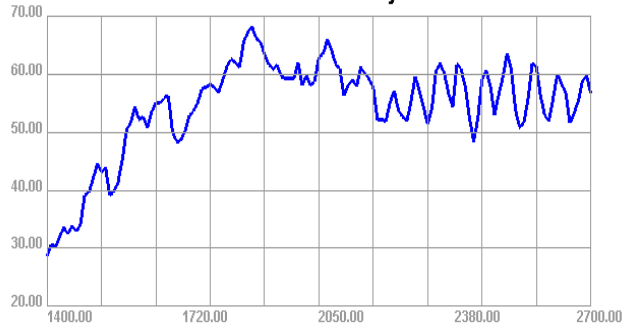


3000.00MHz - 6000.00MHz Efficiency

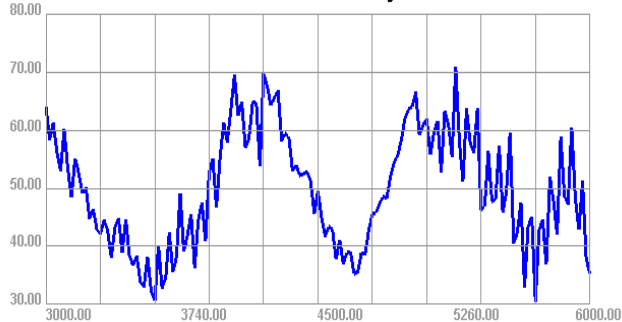

Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
Department		Page	12 /15

7.2 Board length 125mm


610.00MHz - 960.00MHz Efficiency

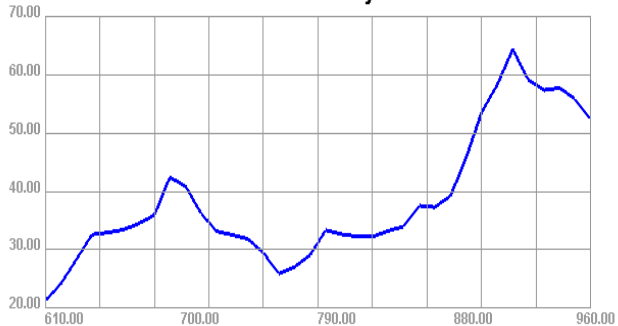

1400.00MHz - 2700.00MHz Efficiency




3000.00MHz - 6000.00MHz Efficiency

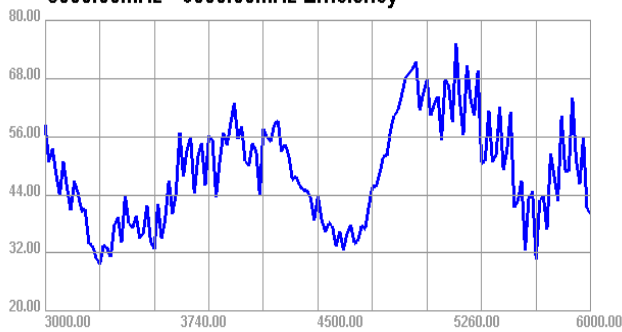

7.3 Board length 105mm


610.00MHz - 960.00MHz Efficiency

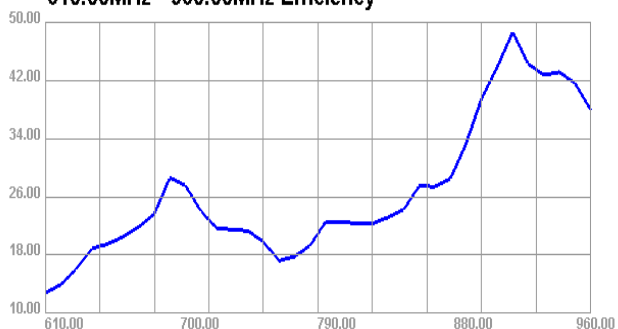

1400.00MHz - 2700.00MHz Efficiency




3000.00MHz - 6000.00MHz Efficiency

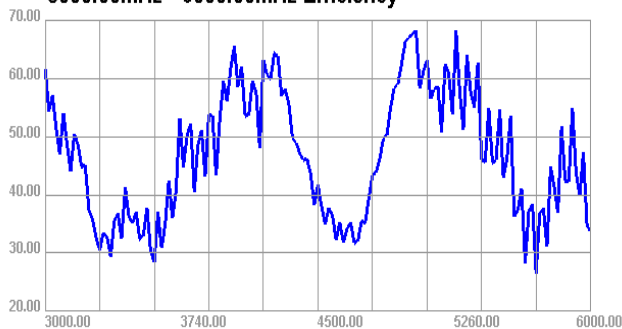


Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
Department		Page	13 /15

7.4 Board length 85mm


610.00MHz - 960.00MHz Efficiency

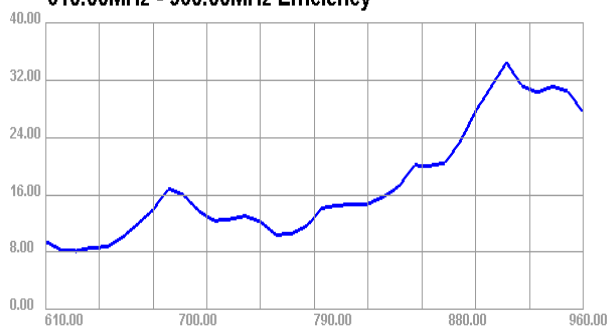

1400.00MHz - 2700.00MHz Efficiency

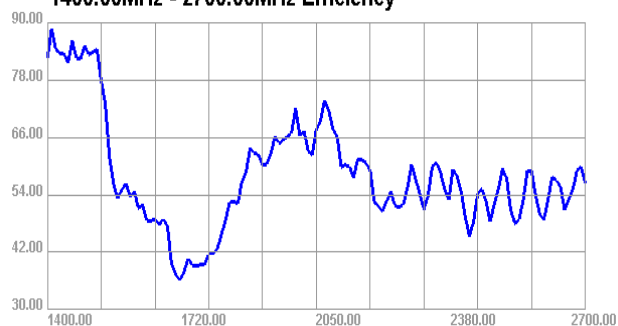


3000.00MHz - 6000.00MHz Efficiency

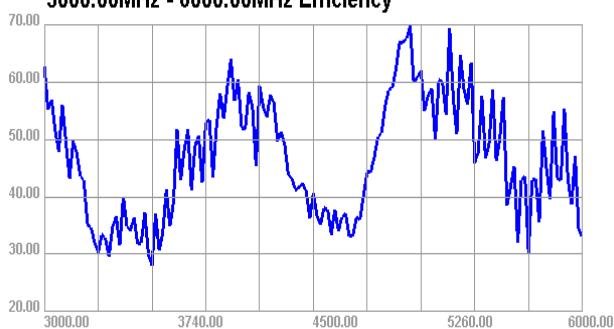

Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
Department		Page	14 /15

8. Antenna Drawings

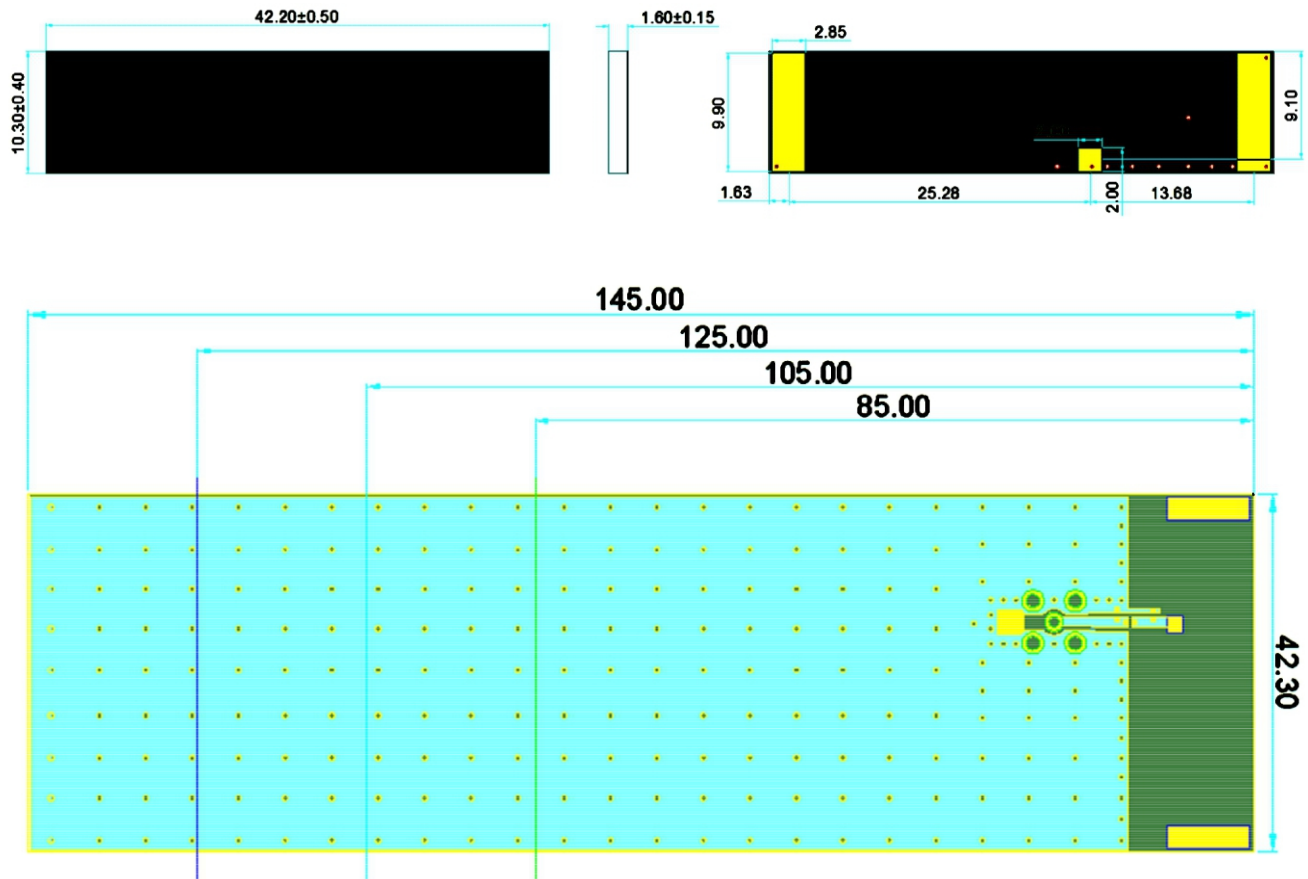

9. Soldering Temperature

PHASE	PROFILE FEATURES	PB-Free Assembly(max.)
RAMP-UP	Avg.Ramp-up Rate(Tsmax to Tp)	3°C/second(max.)

Part name	42.2*10.3*1.6 mm ³ SMD Antenna	Date	2025-08-12
Part number	L-KLS1-5G-F-SMD42.2*10.3*1.6	Edition	V1
Department		Page	15 /15

PREHEAT	Temperature Min(Tsmin)	150
	Temperature Max(Tsmax)	180
	Time(tsmin to tsmax)	120seconds max
REFLOW	Temperature(TL)	210
	Total Time above TL(tl)	50seconnds max
PEAK	Temperature(Tp)	260
	Time(tp)	10seconnds max
RAMP-DOWN	Rate	5 /second max

10. Reflow Profile

