

Product Specification

Number: L-KLS1-WIFI-F-SMD3.5*1.7*1.2

Name: 3.5 X 1.7 X 1.2 mm³
SMD Antenna

Customer: _____

Date: 2025-08-18

Customer Signature:



WWW.KLSELE.COM

NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

**ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.**

Compi	Check	Review	Approva
Jenny	Jack.C		

Part name	3.5 X 1.7 X 1.2 mm ³ SMD Antenna	Date	2025-08-18
Part number	L-KLS1-WIFI-F-SMD3.5*1.7*1.2	Edition	V1
Department		Page	2 / 9


FEATURES

1. Surface Mounted Devices (SMD) with a small dimension of 3.5 X 1.7 X 1.2 mm³ meet miniaturization trend.
2. Low power loss and high antenna efficiency.
3. High stability in Temperature and Humidity Change.

APPLICATIONS

1. 2.4GHz ISM band RF applications
2. Bluetooth, ZigBee, Wireless, HomeRF
3. WIFI (2.4G only)

CONSTRUCTION

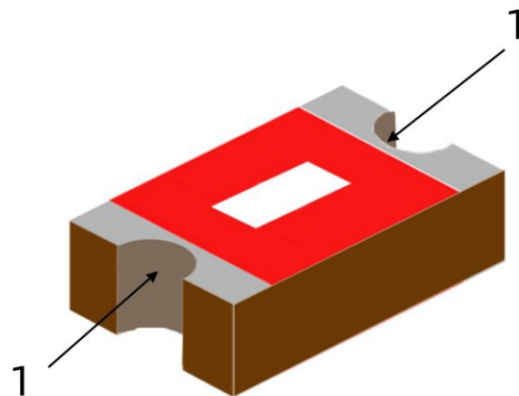

Do not distinguish between feeding pads and fixed pads at both ends of the antenna

DIMENSIONS

Figure	Symbol	Dimension(mm)
	L	3.5 ± 0.2
	w	1.7 ± 0.1
	T	1.2 ± 0.1
	a	0.4 ± 0.1


Part name	3.5 X 1.7 X 1.2 mm ³ SMD Antenna	Date	2025-08-18
Part number	L-KLS1-WIFI-F-SMD3.5*1.7*1.2	Edition	V1
Department		Page	3 / 9

ELECTRICAL CHARACTERISTICS


	Specification
Working Frequency	2450± 50MHz
Band Width	>100MHz
Impedance	50Ω
Gain(dBi)	3.74 (peak)
VSWR	<2
Operation Temperature	-40°C~+95°C
Power Capacity	3W

The 2.4G operating frequency of the antenna needs to be achieved through impedance matching device debugging.

Antenna pad and wiring design

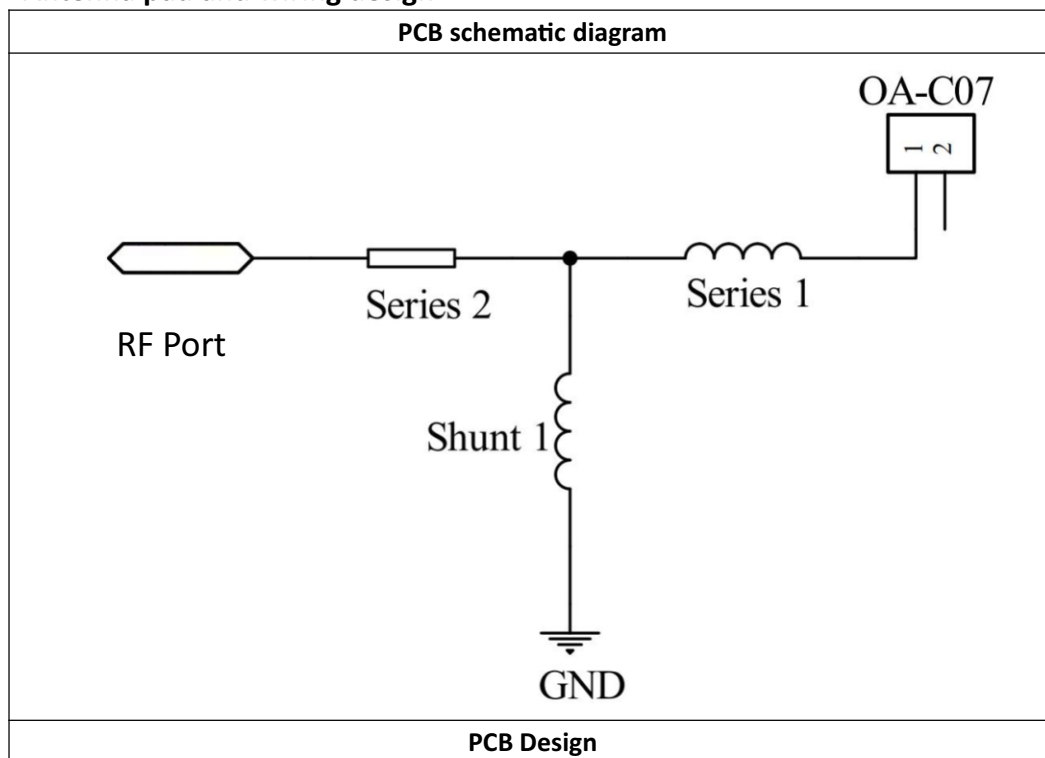

Part name	3.5 X 1.7 X 1.2 mm ³ SMD Antenna	Date	2025-08-18
Part number	L-KLS1-WIFI-F-SMD3.5*1.7*1.2	Edition	V1
Department		Page	4 / 9

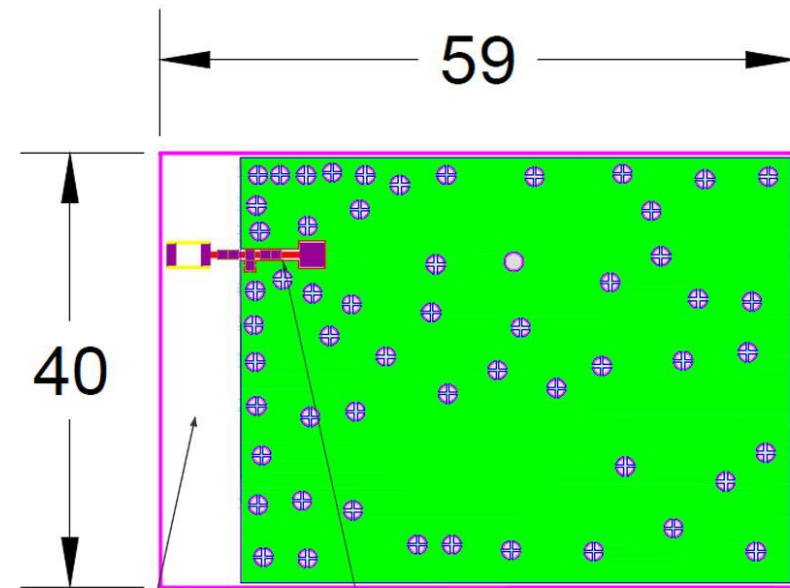


50Ω Feed Line

Empty Area

Unit: mm

- Ground
- 50Ω Transmission Line
- Soldering Pad

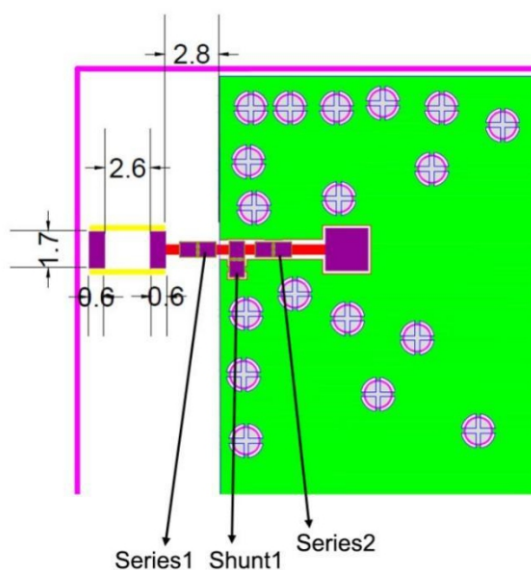


Matching component value


Series 1	5.6nh
Shunt 1	4.7nh
Series 2	0Ω

Part name	3.5 X 1.7 X 1.2 mm ³ SMD Antenna	Date	2025-08-18
Part number	L-KLS1-WIFI-F-SMD3.5*1.7*1.2	Edition	V1
Department		Page	5 / 9

Antenna on Test Board (Thickness 1.0mm)

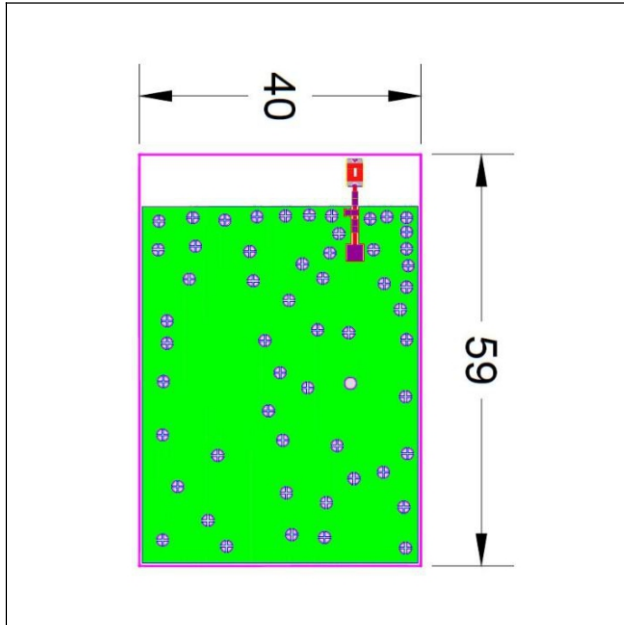


Antenna S11 on Test Board

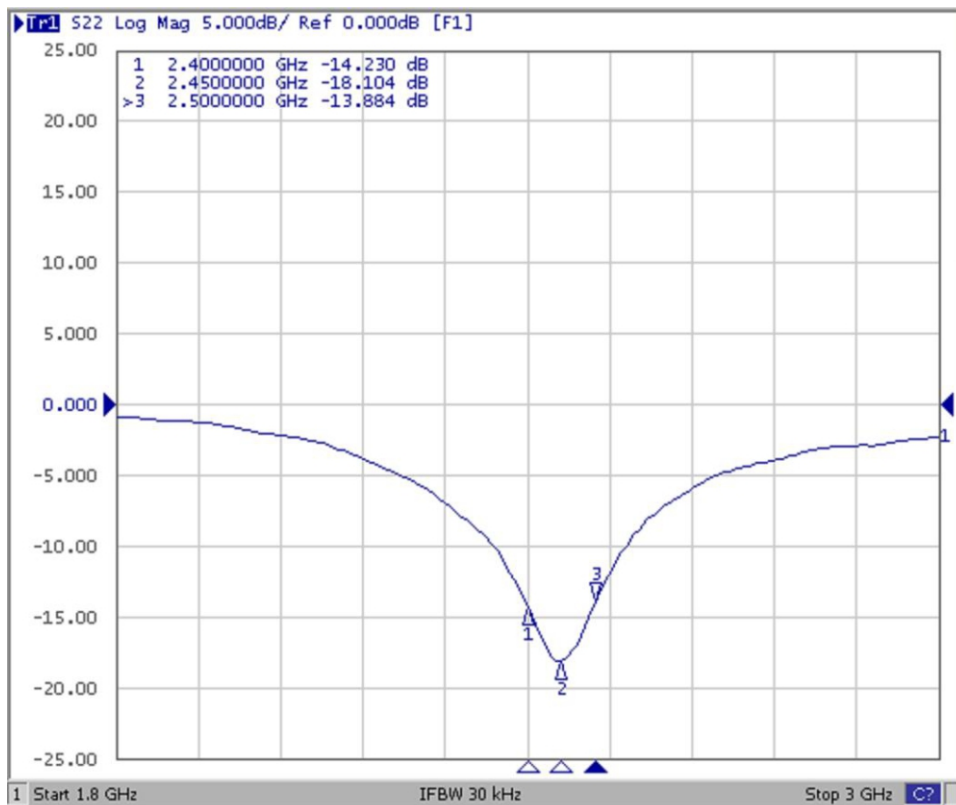



Antenna VSWR on Test Board

Part name	3.5 X 1.7 X 1.2 mm ³ SMD Antenna	Date	2025-08-18
Part number	L-KLS1-WIFI-F-SMD3.5*1.7*1.2	Edition	V1
Department		Page	6 / 9

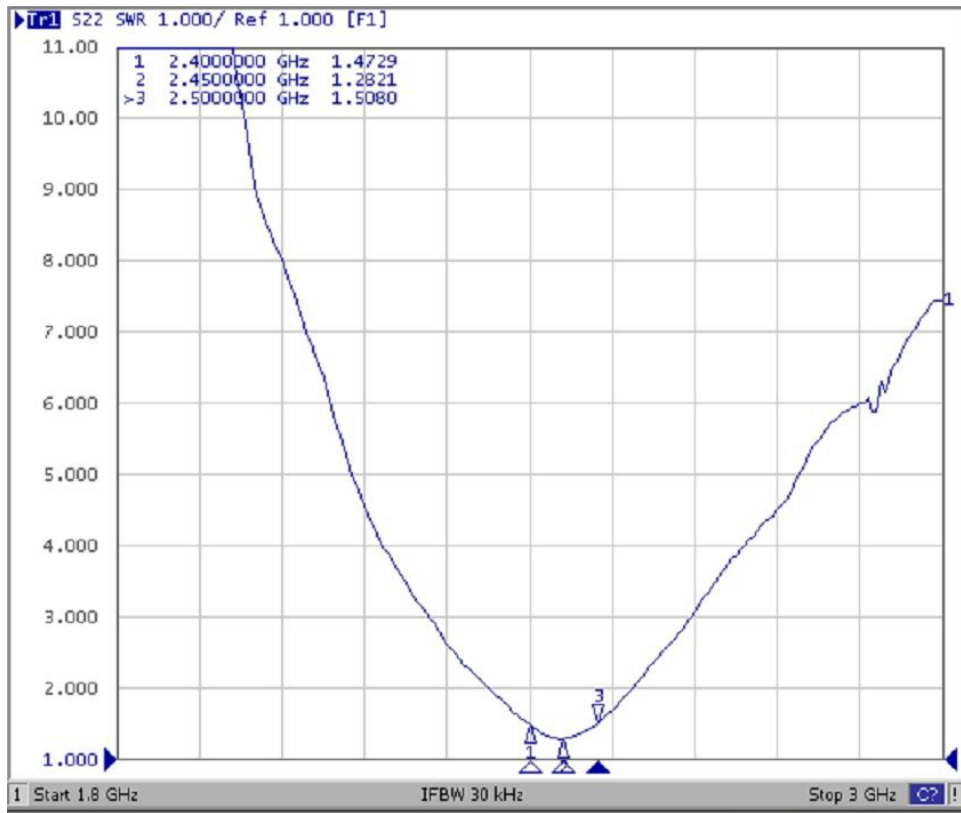


Efficiency and RADIATION PATTERN

Efficiency, Radiation Pattern and Gain were dependent on measurement board design. The specification of L-KLS1-WIFI-F-SMD3.5*1.7*1.2 antenna was measured based on the PCB size and installation position as shown in the below figure test board. The test results were tested in ETS 3D Chamber.



Gain and Efficiency	2.4G-2.5GHz
Peak Gain	3.74dBi
Average Gain across the band	3.66dBi
Gain Range across the band	3.42dBi~3.74dBi
Peak Efficiency	58.9%
Average Efficiency across the band	55.9%
Efficiency Range across the band	53.0%~58.9%


	Part name	3.5 X 1.7 X 1.2 mm ³ SMD Antenna	Date	2025-08-18
	Part number	L-KLS1-WIFI-F-SMD3.5*1.7*1.2	Edition	V1
	Department		Page	7 / 9

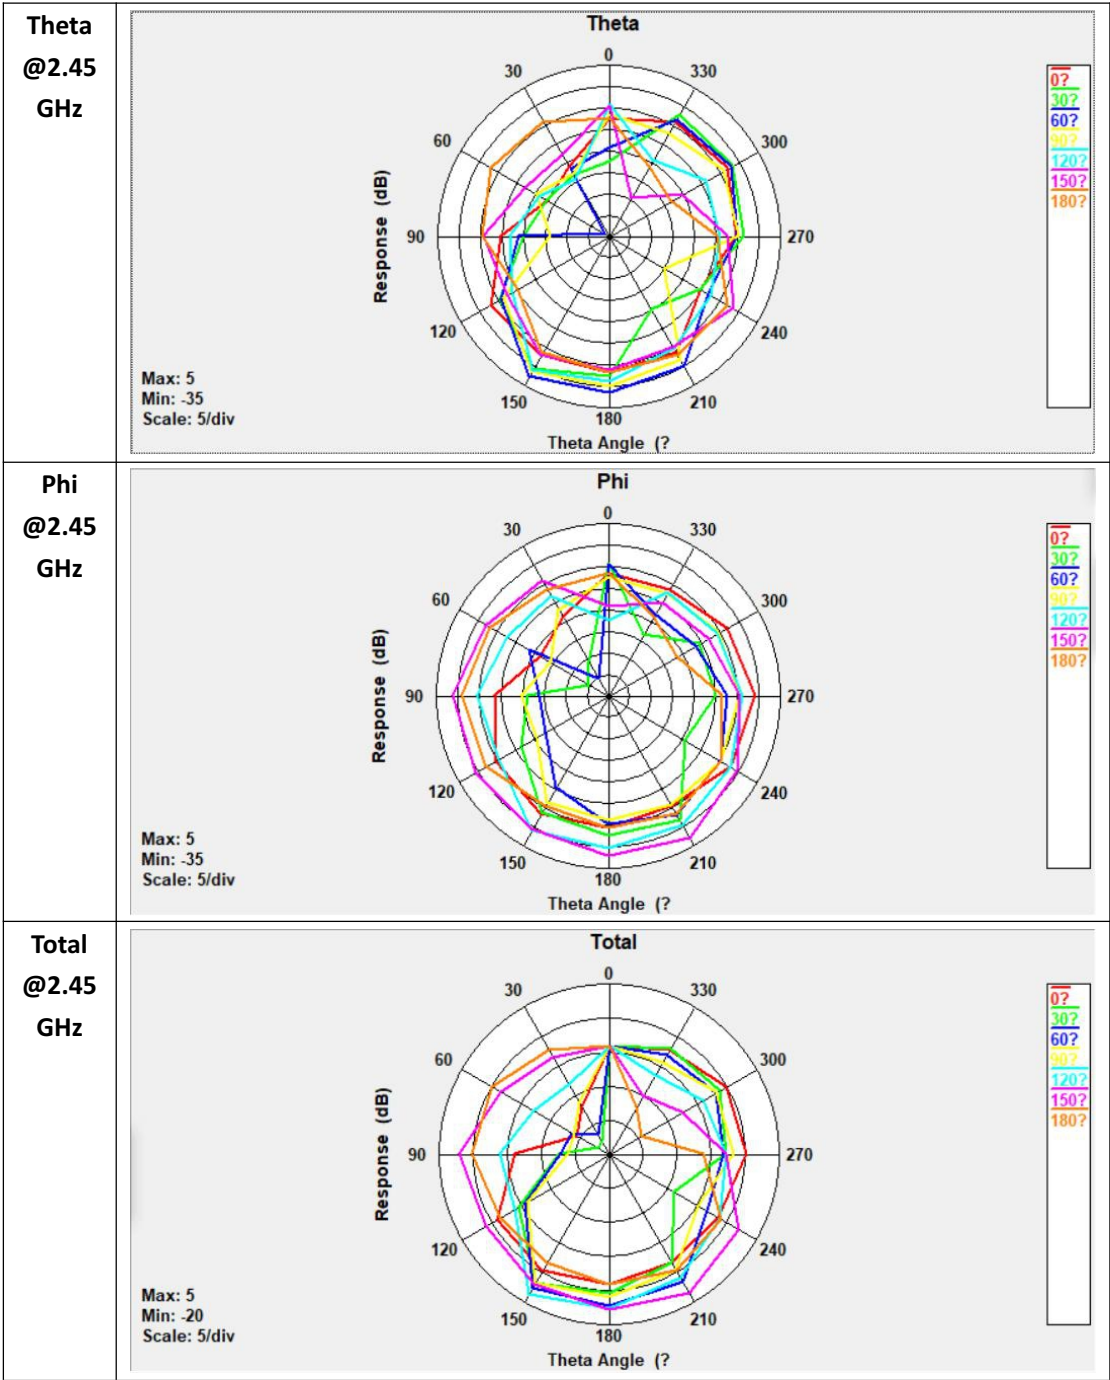

SOLDERING CONDITION


Typical examples of soldering processes that provide reliable joints without any damage is as follows:

Part name	3.5 X 1.7 X 1.2 mm ³ SMD Antenna	Date	2025-08-18
Part number	L-KLS1-WIFI-F-SMD3.5*1.7*1.2	Edition	V1
Department		Page	8 / 9

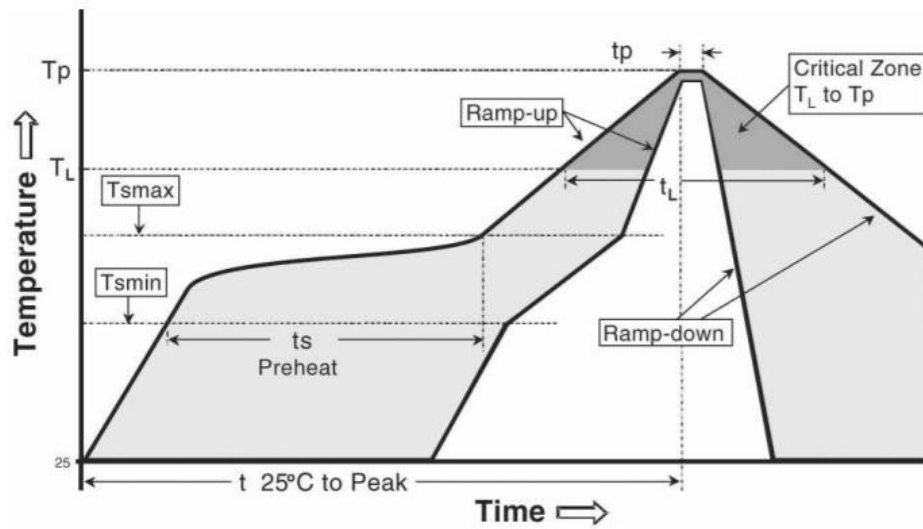

Phase	Profile features	Pb-Free assembly (SnAgCu)
RAMP-UP	Avg. Ramp-up Rate (Tsm to Tp)	3 °C / second (max.)
PREHEAT	- Temperature Min (Tsm) - Temperature Max (Tsm) - Time (tsmin to tsmax)	150 °C 200 °C 60-180 seconds
REFLOW	- Temperature (Tl) - Total Time above Tl (tL)	217 °C 60-150 seconds
PEAK	- Temperature (Tp) - Time (tp)	260 °C 20-40 seconds
RAMP-DOWN	Rate	6 °C/second max
Time from 25 °C to Peak Temperature		8 minutes max

PACKAGING

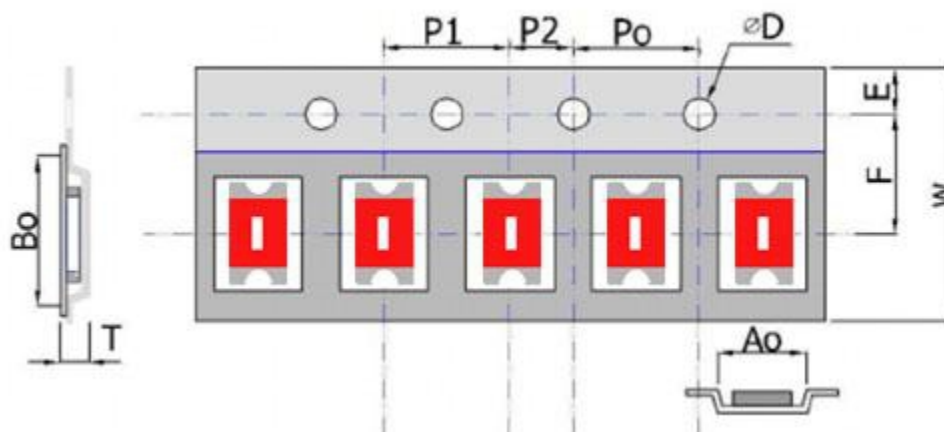


Plastic Tape specification (unit:mm)

Part name	3.5 X 1.7 X 1.2 mm ³ SMD Antenna	Date	2025-08-18
Part number	L-KLS1-WIFI-F-SMD3.5*1.7*1.2	Edition	V1
Department		Page	9 / 9

Index	Ao	Bo	ΦD	T	W
Dimension (mm)	2.0± 0.1	4.0± 0.1	1.55± 0.05	1.8± 0.1	12± 0.1
Index	E	F	Po	P1	P2
Dimension (mm)	1.5± 0.1	5.4± 0.1	4.0± 0.1	4.0± 0.1	2.0± 0.1

Reel dimensions

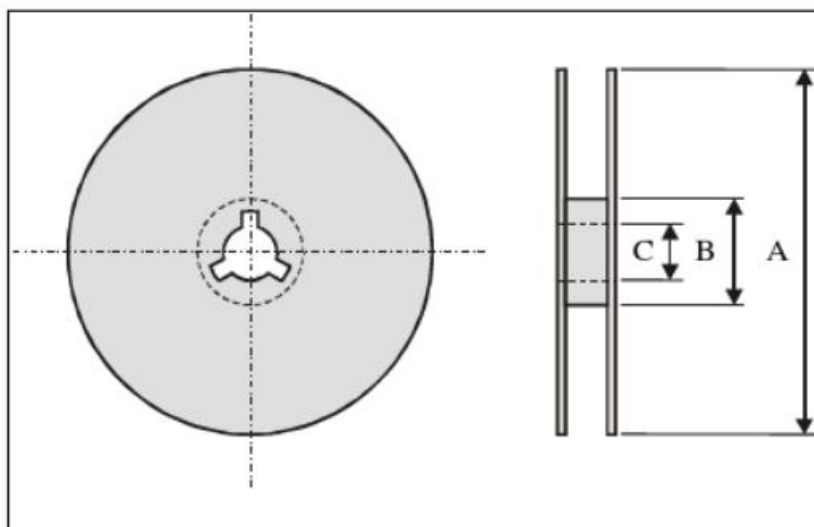

Index	A	B	C
Dimension(mm)	330	100	13.5

Typing Quantity: 3000 pieces per reel.

CAUTION OF HANDLING

Storage environment condition

Products should be storage in the warehouse on the following conditions:

Temperature : -10°C~+40°C

Humidity : 30% to 70% relative humidity

Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.

Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.

Products should be storage under the airtight packaged condition.