

Product Specification

Number: L-KLS1-WIFI-F-SMD08*03*01

Name: 8.0 X 3.0 X 1.0 mm³
SMD Antenna

Customer: _____

Date: 2025-08-19

Customer Signature:



WWW.KLSELE.COM

NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

**ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.**

Compi	Check	Review	Approva
Jenny	Jack.C		

Part name	8.0 X 3.0 X 1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-F-SMD08*03*01	Edition	V1
Department		Page	2 / 9


FEATURES

1. Surface Mounted Devices (SMD) with a small dimension of 8.0 X 3.0 X 1.0 mm³ meet miniaturization trend.
2. Low power loss and high antenna efficiency.
3. High stability in Temperature and Humidity Change.

APPLICATIONS

1. 2.4G/5G WIFI band RF applications
2. WIFI (2.4G/5G)

CONSTRUCTION

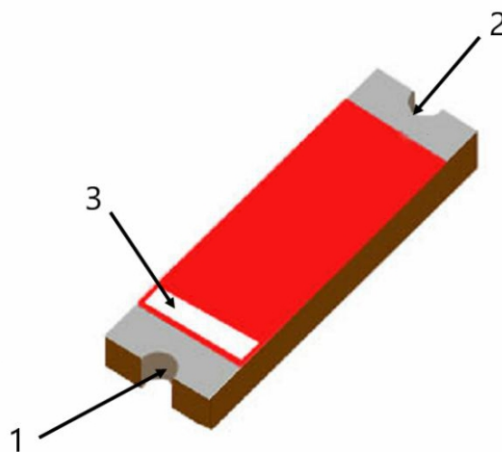

1、 Antenna Feeding

2、 Soldering terminal

3、 Identification Mark

DIMENSIONS

Figure	Symbol	Dimension(mm)
	L	8.0 ± 0.1
	w	3.0 ± 0.1
	T	1.0 ± 0.1
	a	0.6 ± 0.1

Part name	8.0 X 3.0 X 1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-F-SMD08*03*01	Edition	V1
Department		Page	3 / 9



ELECTRICAL CHARACTERISTICS


	Specification
Working Frequency Range	2400-2500MHz, 5200-5800MHz
Impedance	50Ω
Gain(dBi)	3.3dBi (2.45GHz) , 1.0dBi (5.5Ghz)
VSWR	<2
Operation Temperature	-40°C~+85°C
Power Capacity	3W

The working frequency need be adjusted to 2.45GHz with matching circuit.

SOLDER LAND PATTERN DESIGN

Figure

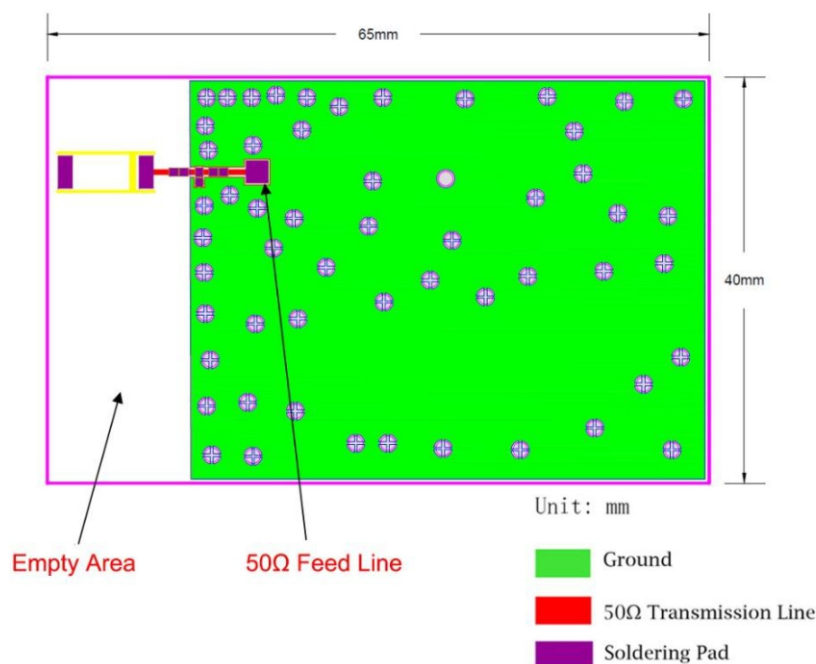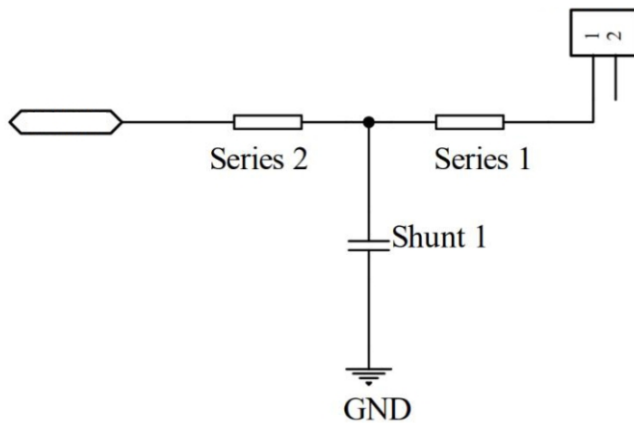

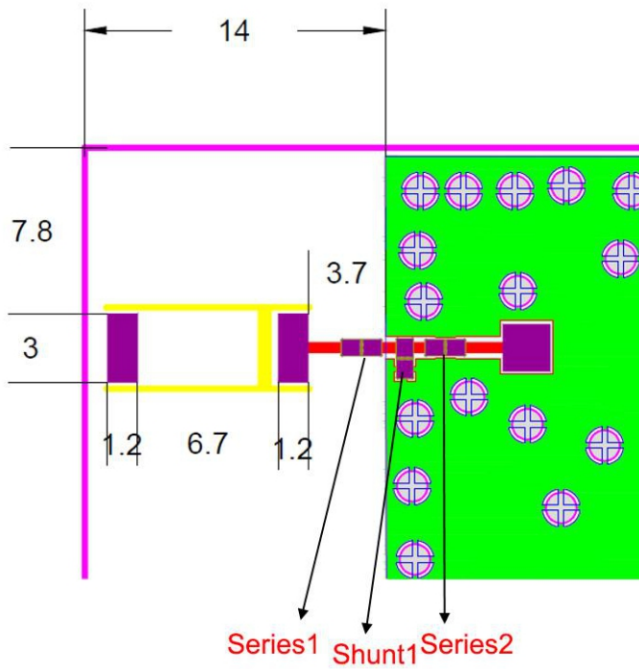

Matching component value

Series 1

0Ω


Shunt 1

NC



Series 2

0Ω

Antenna on Test Board (Thickness 1.0mm)


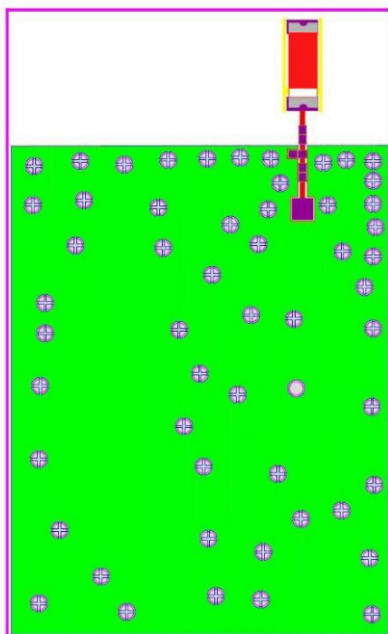


Part name	8.0 X 3.0 X 1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-F-SMD08*03*01	Edition	V1
Department		Page	5 / 9

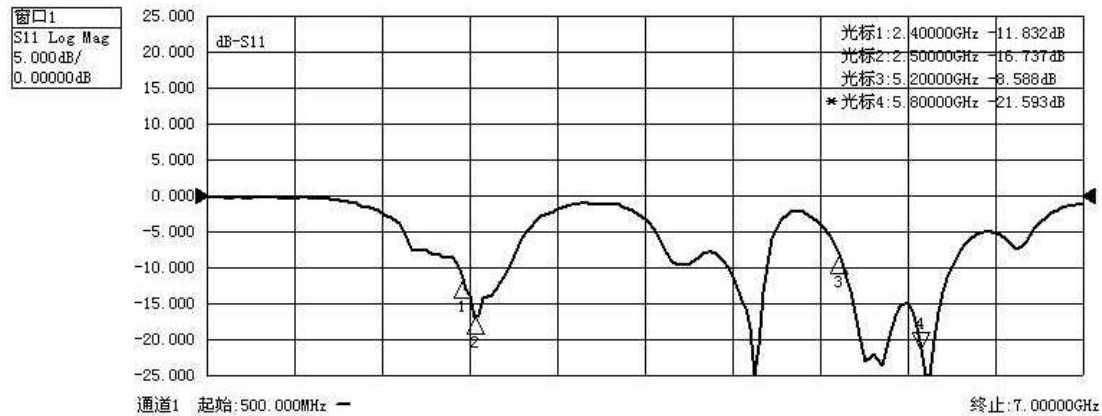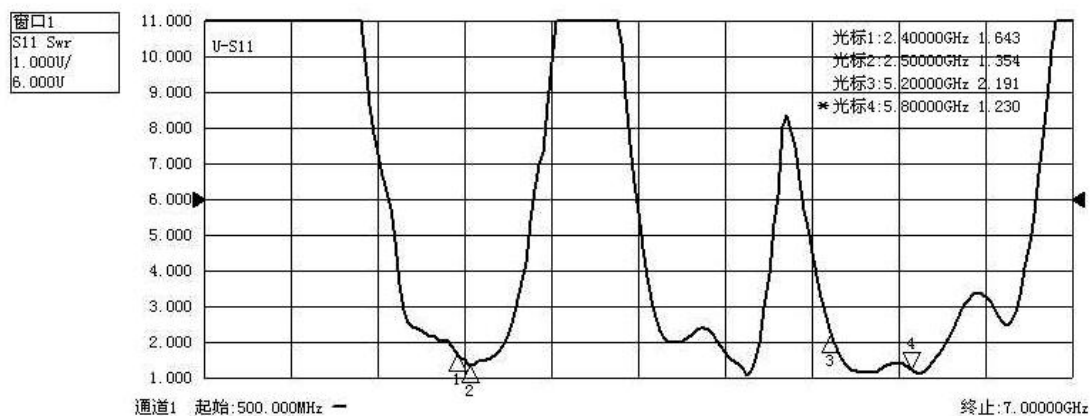Antenna S11 on Test Board

Antenna VSWR on Test Board


Efficiency and RADIATION PATTERN


Efficiency , Radiation Pattern and Gain were dependent on measurement board design. The specification of L-KLS1-WIFI-F-SMD08*03*01 antenna was measured based on the PCB size and installation position as shown in the below figure test board. The test results were tested in ETS 3D Chamber.



Gain and Efficiency	2.4G-2.5GHz	5.2G-5.8GHz
Peak Gain	3.3dBi	1.0
Average Gain across the band	3.0dBi	0.48
Gain Range across the band	2.6dBi~3.3dBi	-0.7dBi~1.0dBi
Peak Efficiency	73.3%	54.5%


Part name	8.0 X 3.0 X 1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-F-SMD08*03*01	Edition	V1
Department		Page	6 / 9

Average Efficiency across the band	68.4%	42.2%
Efficiency Range across the band	63.8%~73.3%	32.4%~54.5%

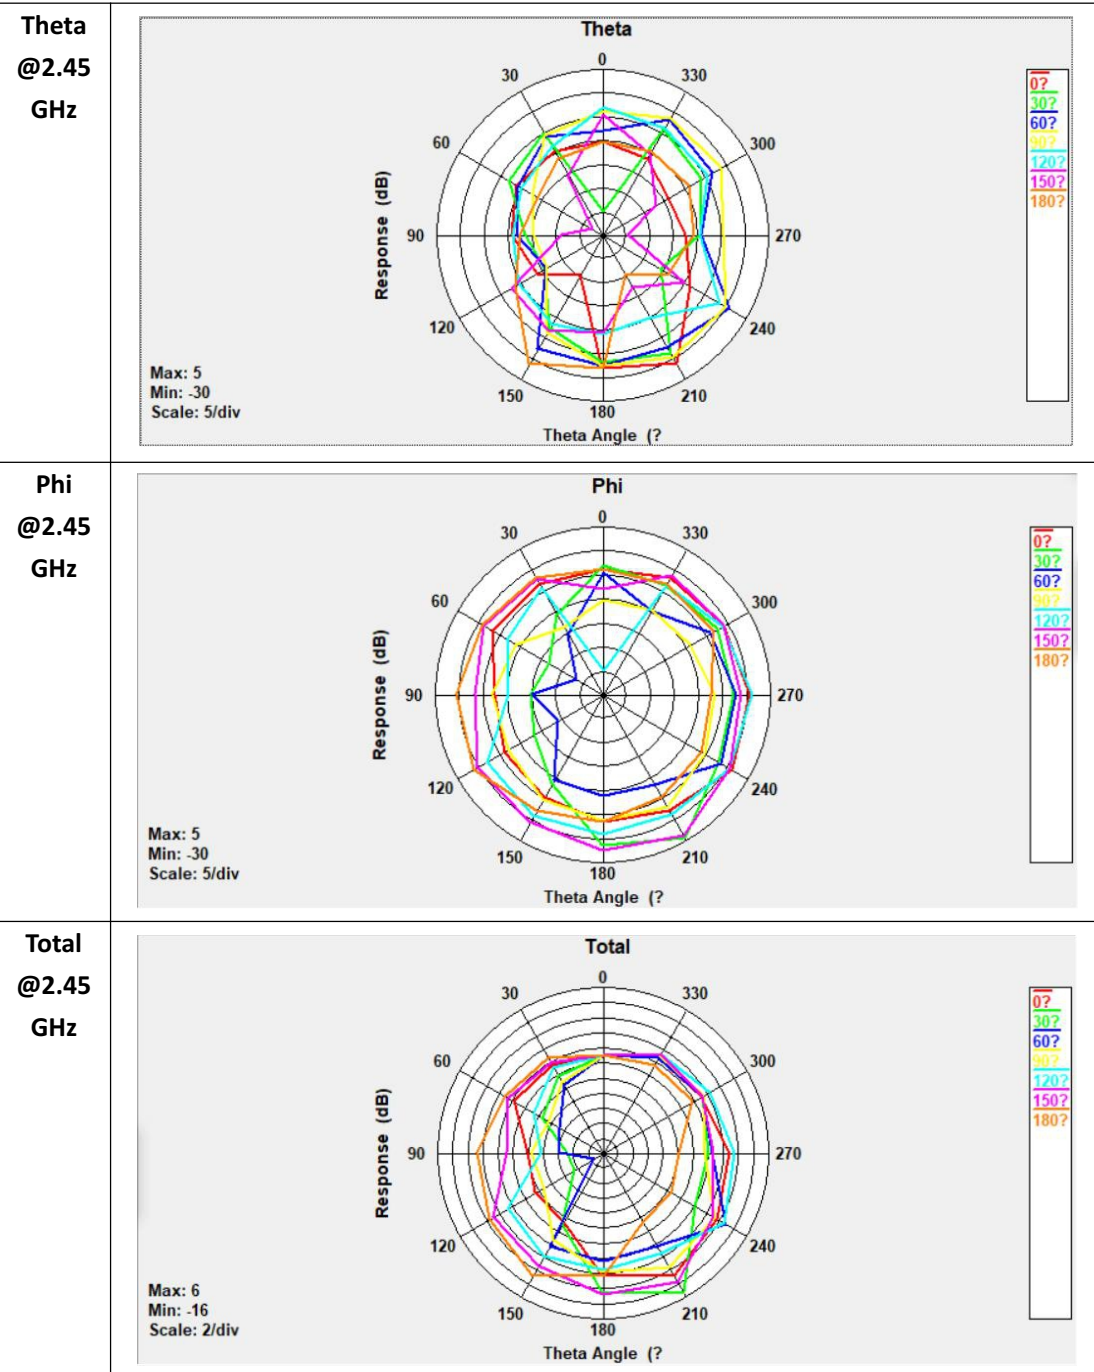


Part name	8.0 X 3.0 X 1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-F-SMD08*03*01	Edition	V1
Department		Page	7 / 9


**Theta
@5.5
GHz**

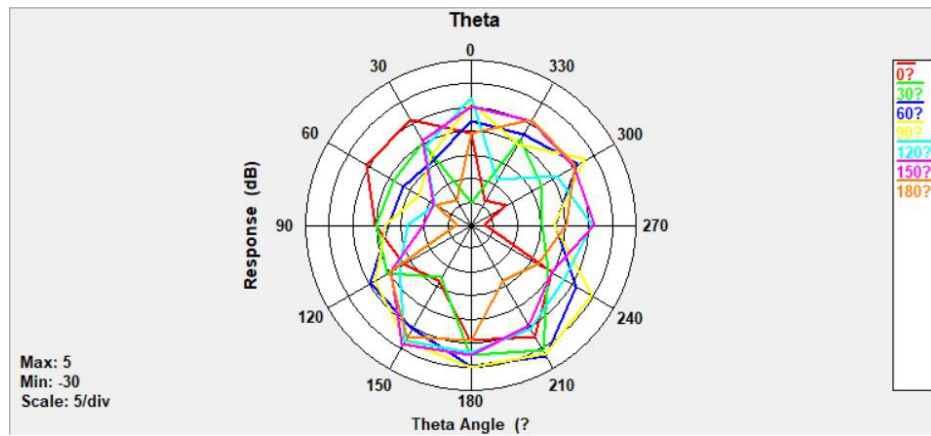

**Phi
@5.5
GHz**

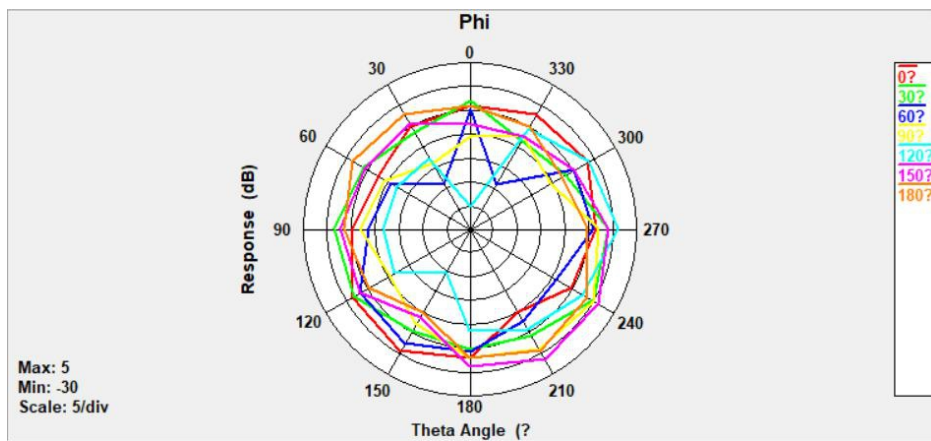


**Total
@5.5
GHz**

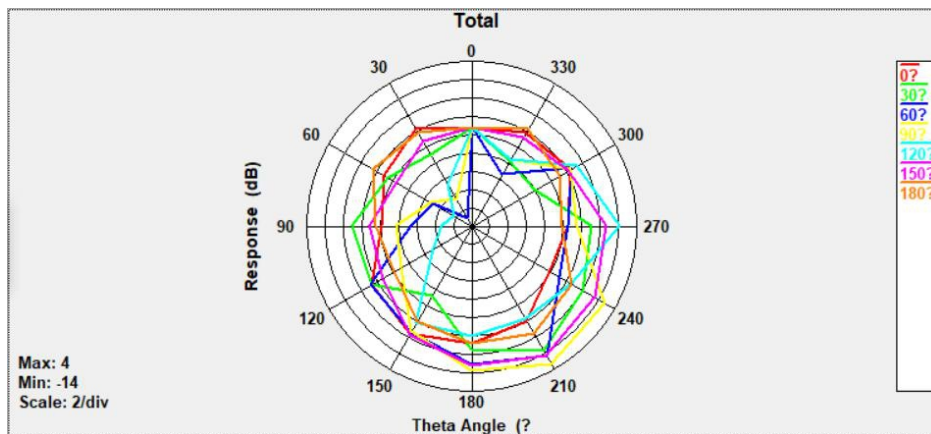


SOLDERING CONDITION

Typical examples of soldering processes that provide reliable joints without any damage is as follows:

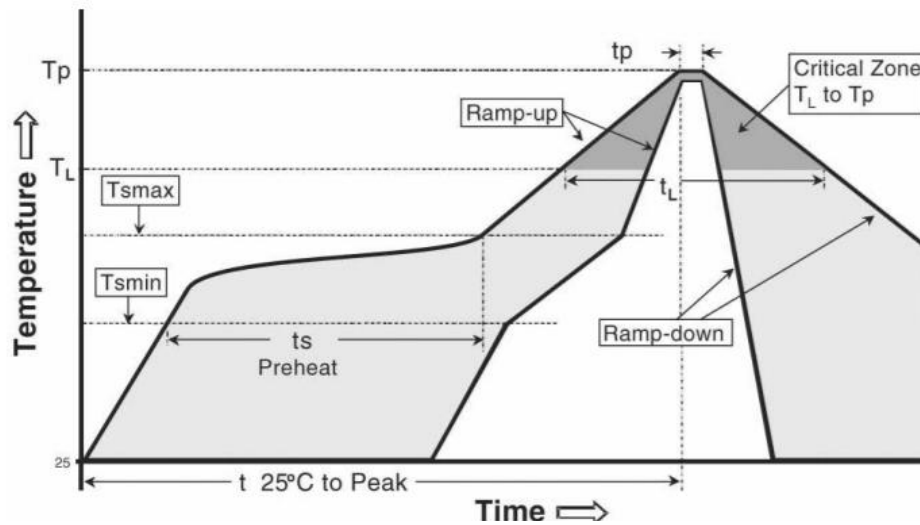

Phase	Profile features	Pb-Free assembly (SnAgCu)
RAMP-UP	Avg. Ramp-up Rate (T_{smax} to T_p)	3 °C / second (max.)
PREHEAT	- Temperature Min (T_{smin}) - Temperature Max (T_{smax}) - Time (t_{smin} to t_{smax})	150 °C 200 °C 60-180 seconds
REFLOW	- Temperature (T_L) - Total Time above T_L (t_L)	217 °C 60-150 seconds
PEAK	- Temperature (T_p) - Time (t_p)	260 °C 20-40 seconds
RAMP-DOWN	Rate	6 °C/second max
Time from 25 °C to Peak Temperature		8 minutes max

PACKAGING

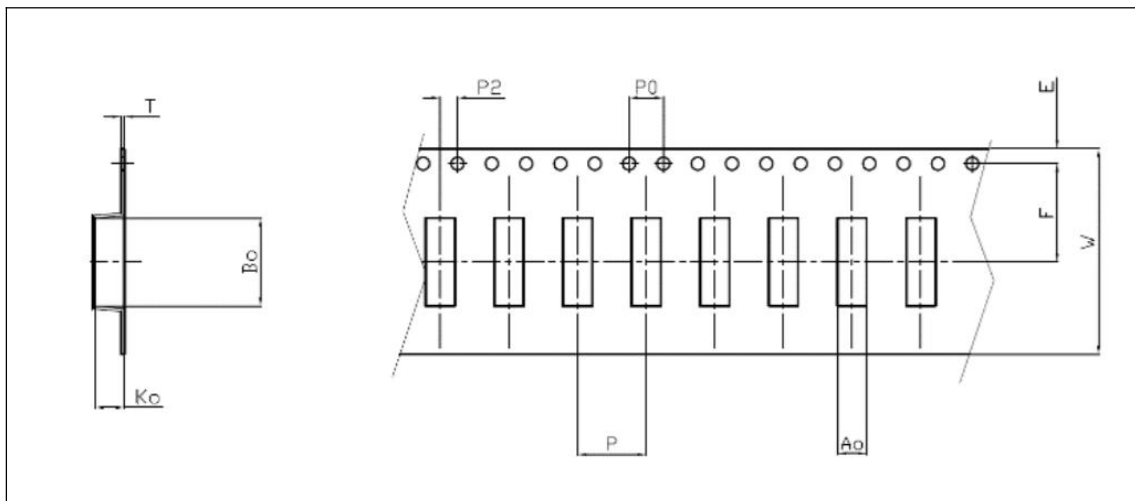


Plastic Tape specification (unit:mm)

Part name	8.0 X 3.0 X 1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-F-SMD08*03*01	Edition	V1
Department		Page	9 / 9

Index	Ao	Bo	ΦD	T	W
Dimension (mm)	3.3± 0.1	8.4± 0.1	1.3± 0.05	0.3± 0.05	16.0± 0.3
Index	E	F	Po	P1	P2
Dimension (mm)	1.75± 0.1	7.0± 0.1	8.0± 0.1	4.0± 0.1	2.0± 0.1

Reel dimensions

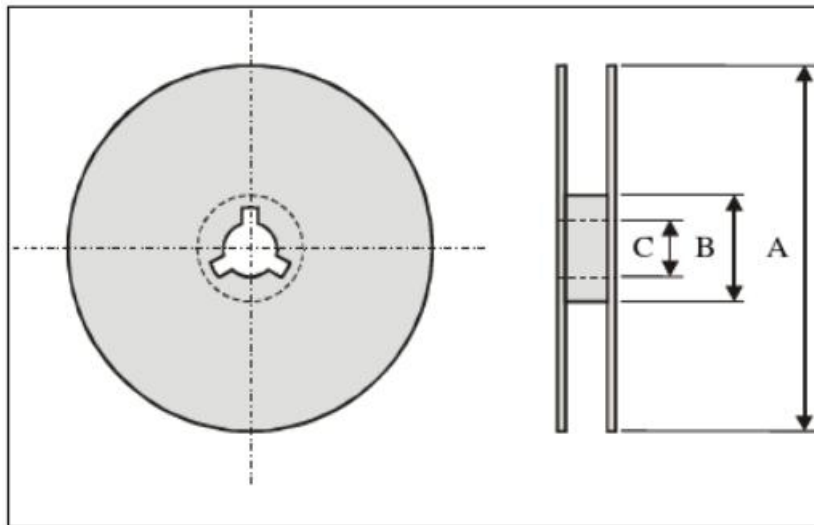

Index	A	B	C
Dimension(mm)	330	100	13.5

Typing Quantity: 2000 pieces per reel.

CAUTION OF HANDLING

Storage environment condition

Products should be storage in the warehouse on the following conditions:

Temperature : -10°C~+40°C

Humidity : 30% to 70% relative humidity

Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.

Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.

Products should be storage under the airtight packaged condition.