

Product Specification

Number: L-KLS1-WIFI-T-SMD9.5*02*01

Name: 9.5*2.0*1.0 mm³
SMD Antenna

Customer: _____

Date: 2025-08-19

Customer Signature:



NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

**ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.**

Compi	Check	Review	Approva
Jenny	Jack.C		

Part name	9.5*2.0*1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-T-SMD9.5*02*01	Edition	V1
Department		Page	2 / 12

◆ Features

- Light weight and low profile 9.5mm(L)X2.0mm(W)X1.0mm(H)
 - Omni-directional in azimuth
- Lead (Pb) Free

◆ Applications


- 2.4GHz wireless communications
 - 2.4GHz Modules
 - Bluetooth System
- 802.11b/g Wireless LAN System

Specifications

Center frequency	2.45GHz
Peak gain	1.5dBi
Operation temperature	-40 ~ +85 °C
Storage temperature	-40 ~ +85 °C
VSWR	2.0 (max)
Input Impedance	50 Ohm
Power handling	3W (max)
Bandwidth	200MHz
Azimuth beamwidth	Omni-directional
Polarization	Linear


Pin configuration

Top view

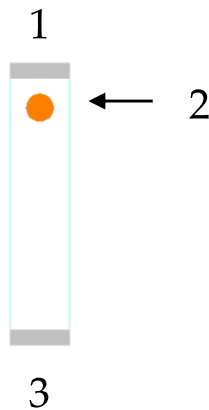


Pin No	Pin assignment
1	Feed termination
2	Feed point mark
3	Solder termination

Dimensions

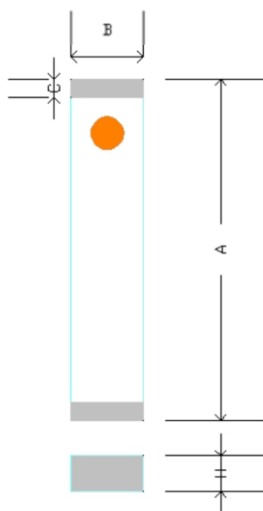

Symbol	Dimensions(mm)
A	9.50 ± 0.10
B	2.10 ± 0.10
C	0.50 ± 0.05
H	1.00 ± 0.20

PCB foot printer

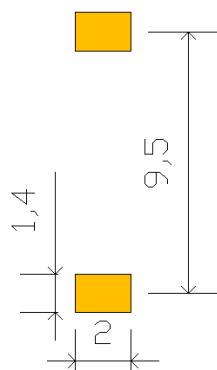

Part name	9.5*2.0*1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-T-SMD9.5*02*01	Edition	V1
Department		Page	4 / 12

Recommended Test Board Pattern


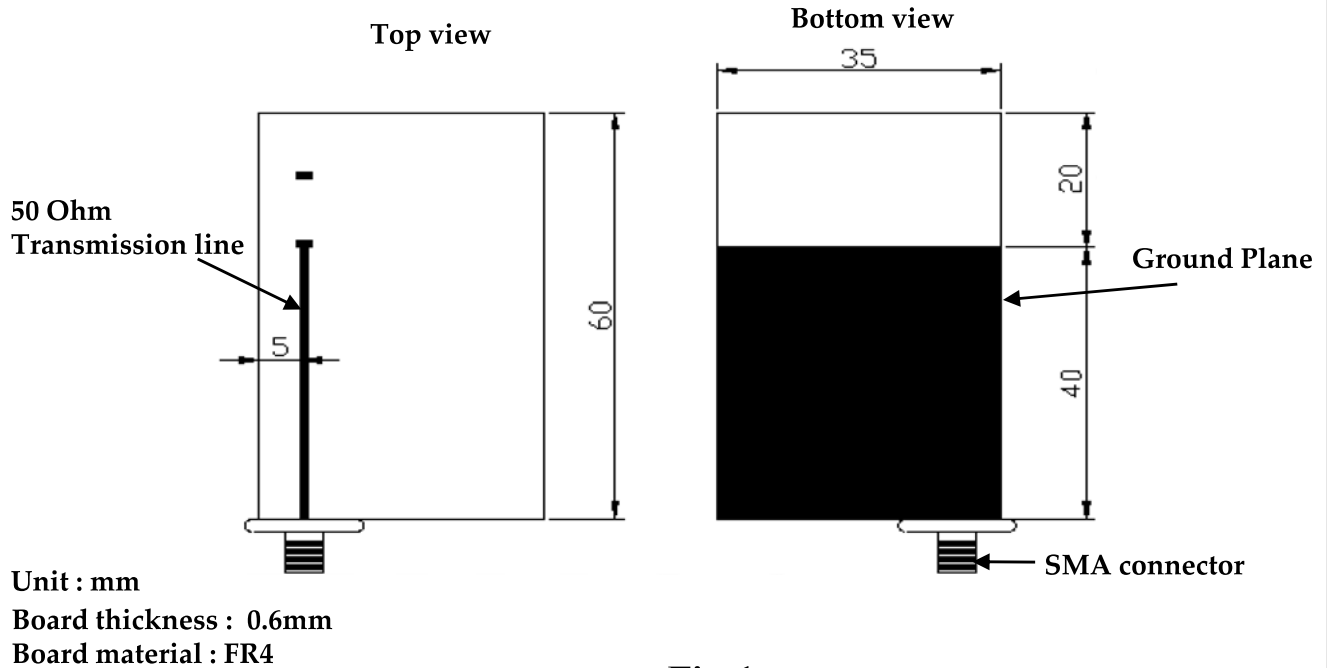


Fig-1

Testing Setup



Measurement

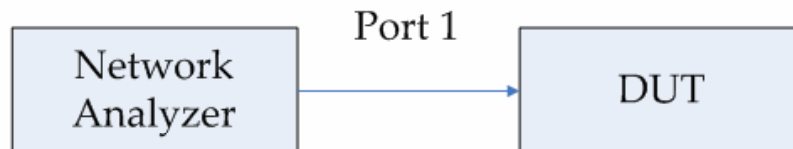

Testing Instrument:

Anritsu 37369C VNA (Vector Network Analyzer)


VNA calibrate with 1 path reflection only calibration sequence on test board feed point.

The test board dimension and its layout is the same as Fig-1.


Part name	9.5*2.0*1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-T-SMD9.5*02*01	Edition	V1
Department		Page	5 / 12

Typical Electrical Characteristics

Return loss

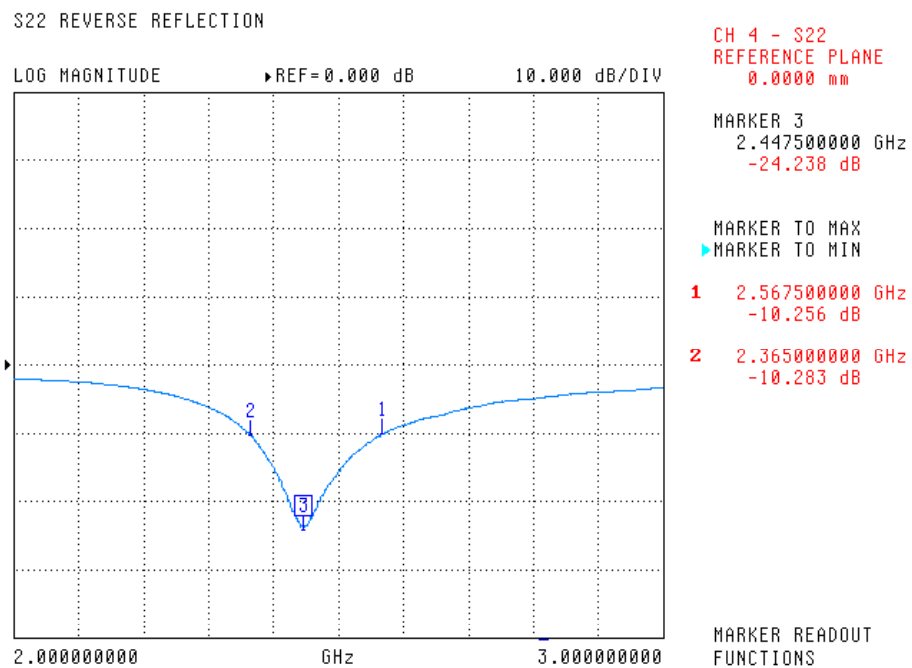


Smith Chart

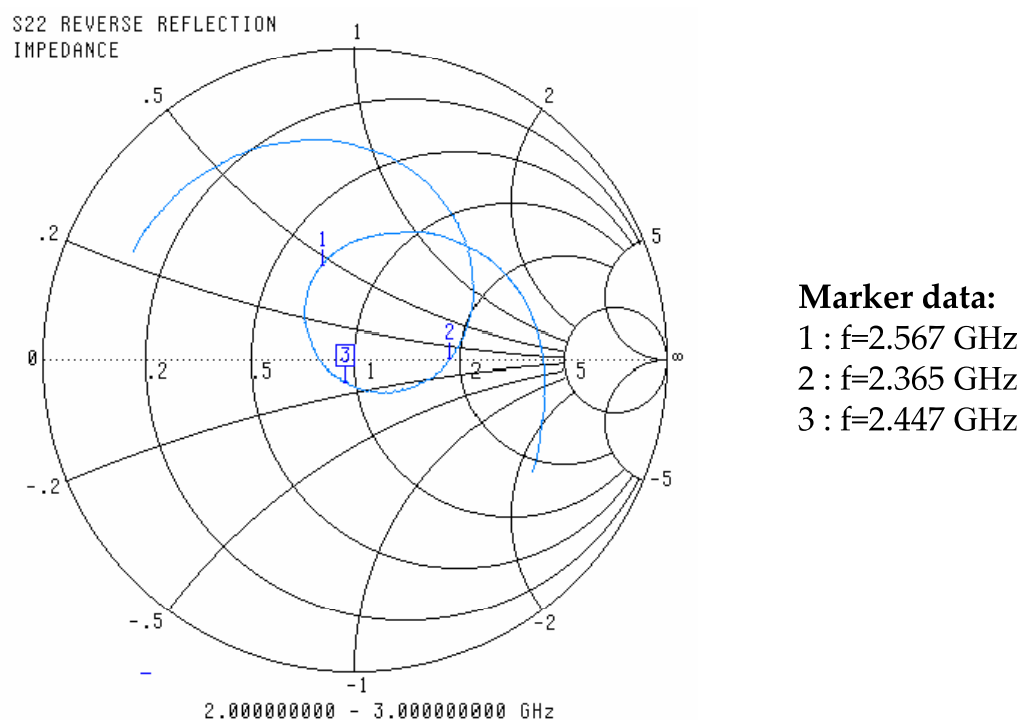


Typical Radiation Patterns

2.45 GHz H-Plane

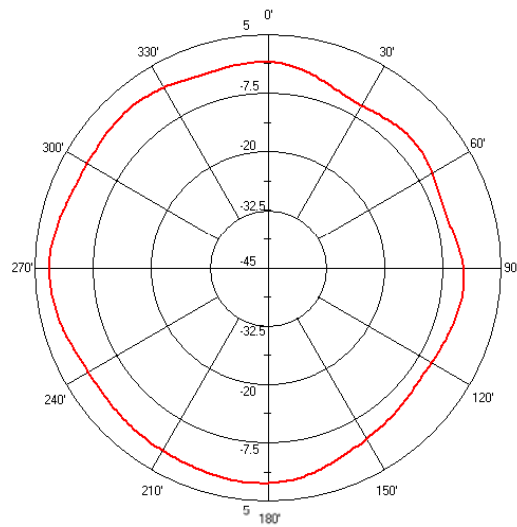


2.45 GHz E-Plane

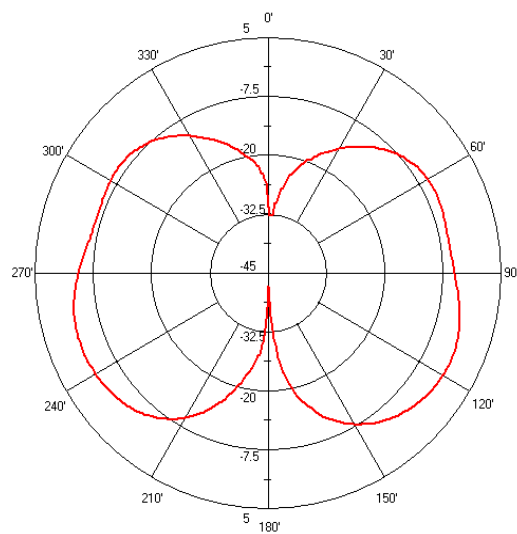


Part name	9.5*2.0*1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-T-SMD9.5*02*01	Edition	V1
Department		Page	7 / 12

3D Pattern

Total, Top View

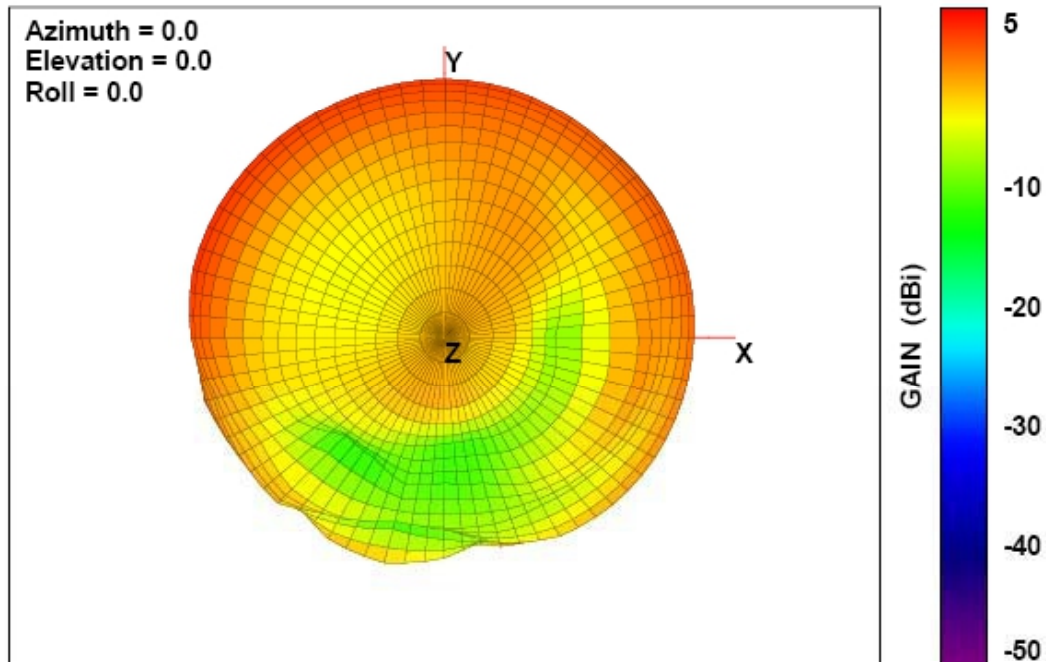

Total, Bottom View


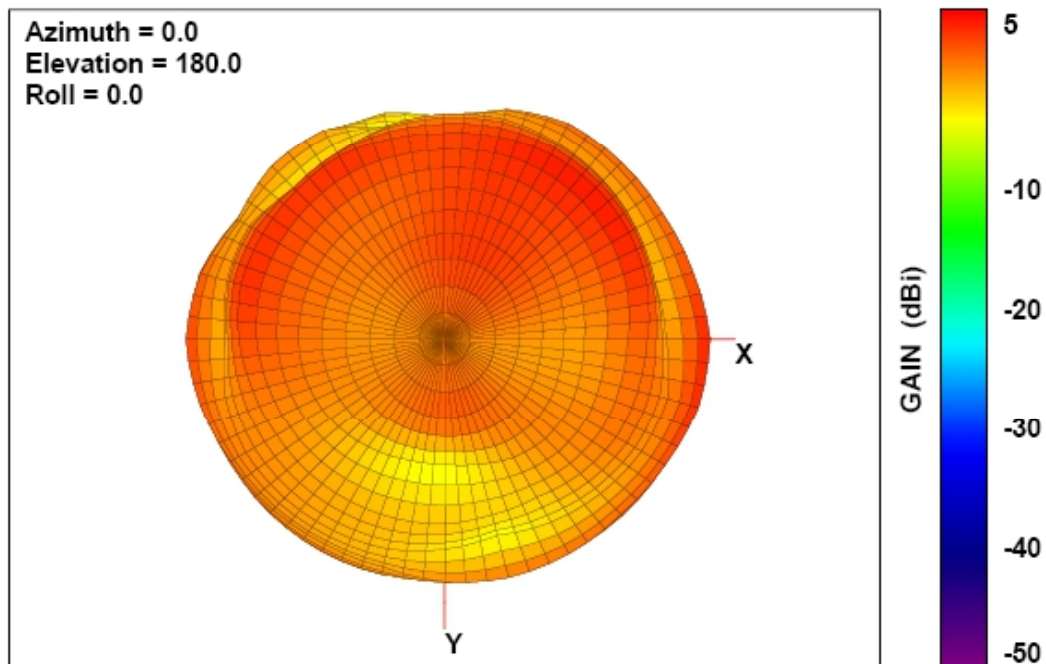


Part name	9.5*2.0*1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-T-SMD9.5*02*01	Edition	V1
Department		Page	8 / 12

3D Pattern

Total, Back Face View



Azimuth = 0.0
Elevation = 90.0
Roll = 0.0

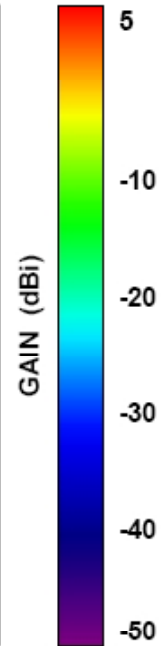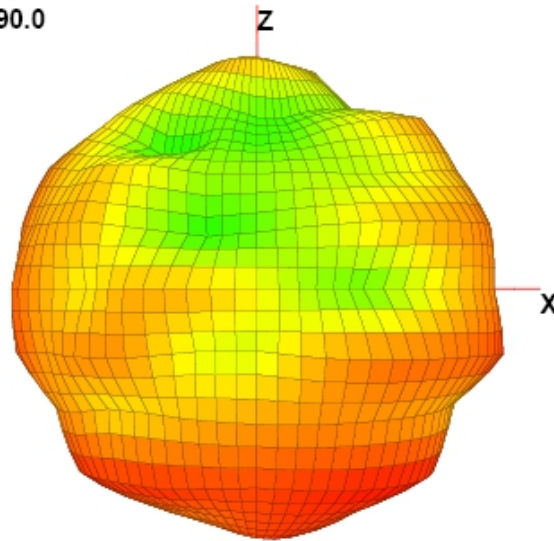

Free-Space Total GAIN, Back Face View, 2450.0 MHz

Total, Left Side View

Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

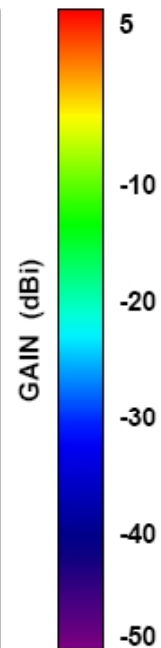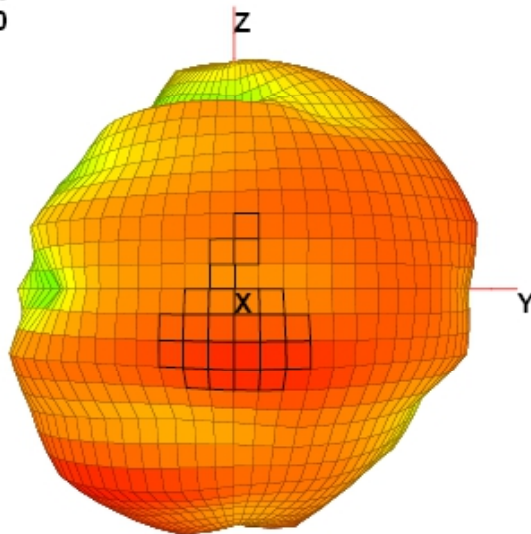


Free-Space Total GAIN, Left Side View, 2450.0 MHz

Part name	9.5*2.0*1.0 mm ³ SMD Antenna	Date	2025-08-19
Part number	L-KLS1-WIFI-T-SMD9.5*02*01	Edition	V1
Department		Page	9 / 12


3D Pattern

Total, Front Face View

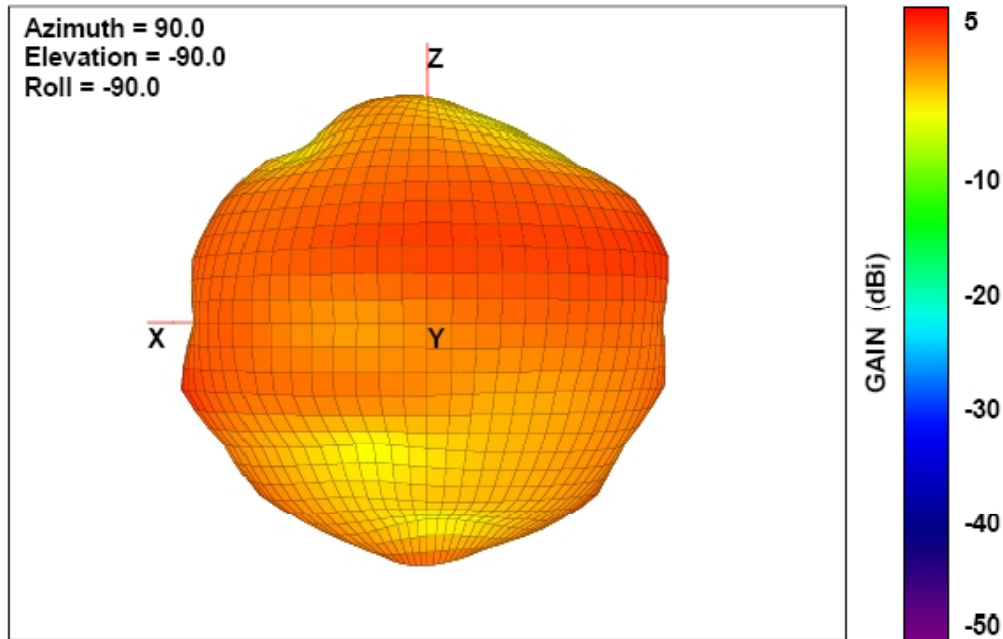


Free-Space Total GAIN, Front Face View, 2450.0 MHz

Total, Right Side View

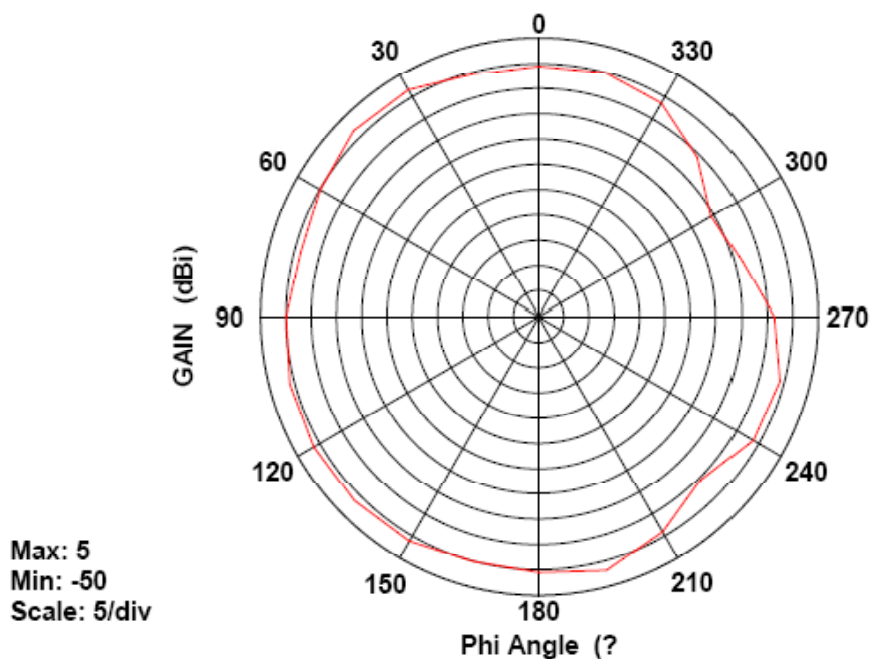


Free-Space Total GAIN, Right Side View, 2450.0 MHz

Typical Soldering Profile for Lead-free Process

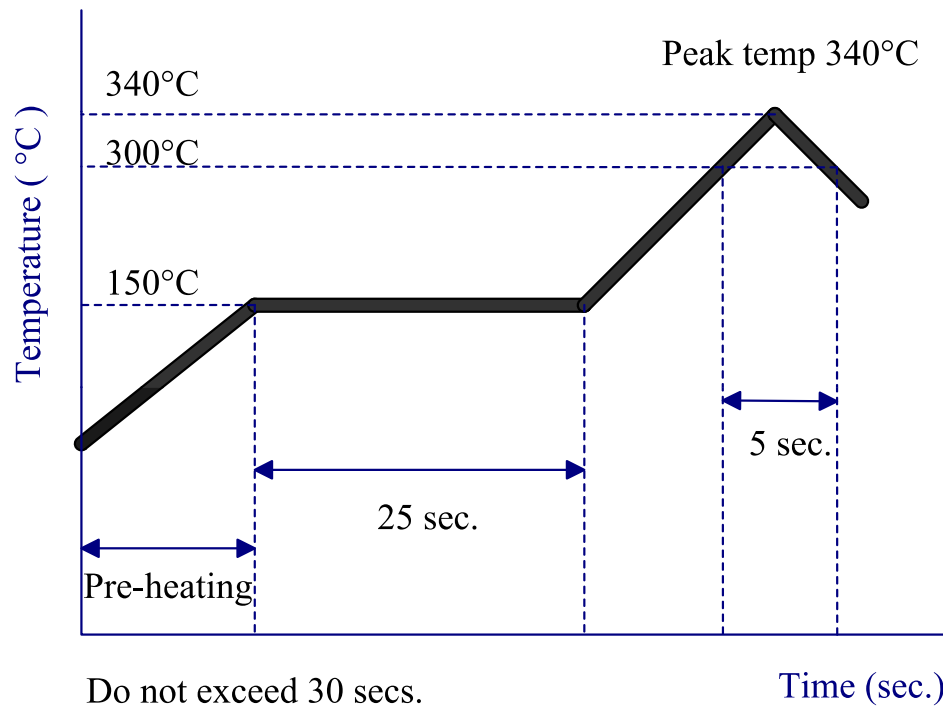


Reflow Soldering

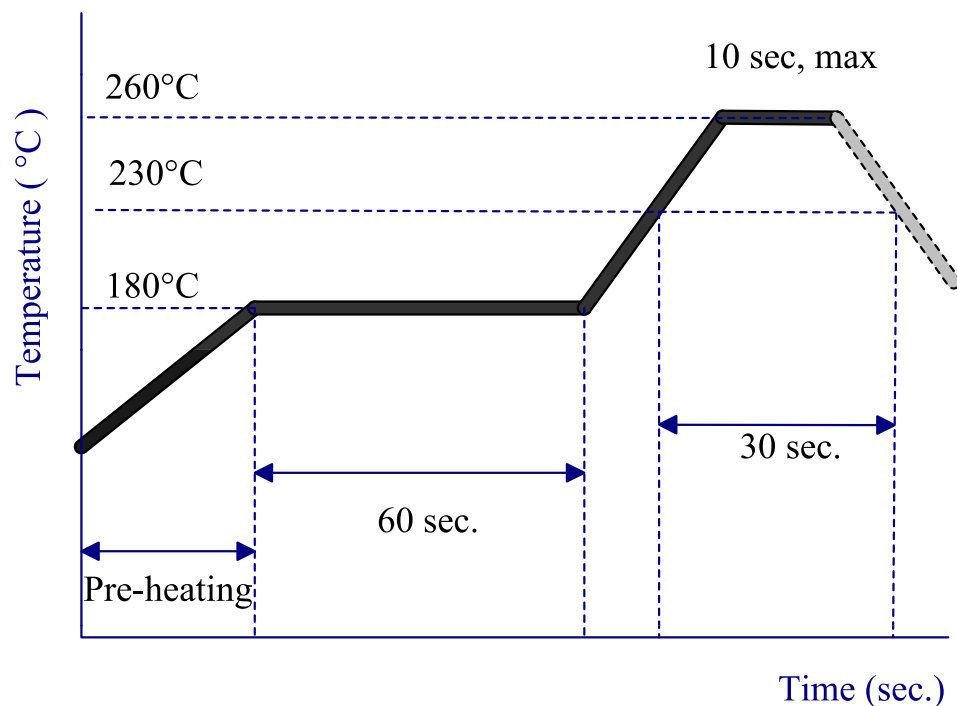


Packing

Blister Tape Specifications

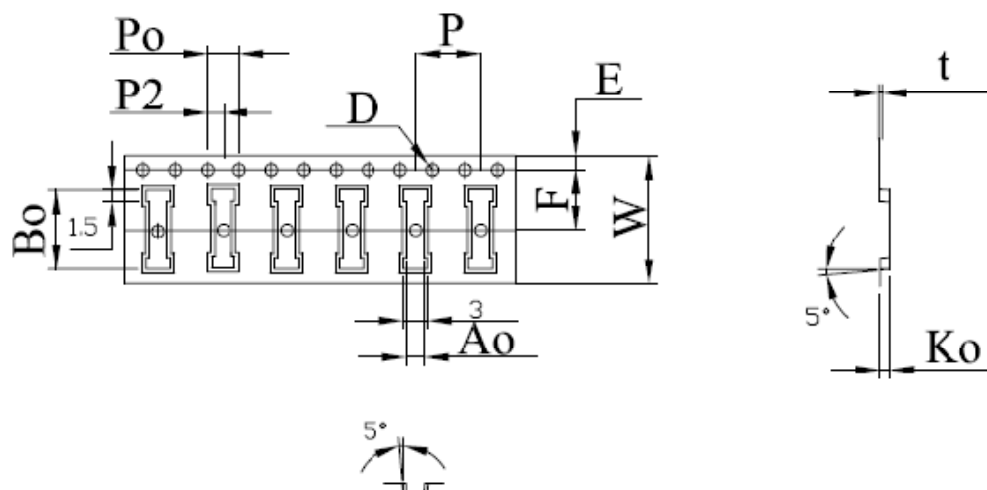

Symbol	Dimension	Tolerance	Unit
W	16.00	± 0.30	mm
E	1.75	± 0.10	mm
F	7.50	± 0.10	mm
D	1.50	+ 0.10 - 0.00	mm
D_1	1.50	+ 0.25 - 0.00	mm
P_0	4.00	± 0.10	mm
P	8.00	± 0.10	mm
P_2	2.00	± 0.10	mm
A_0	2.20	± 0.10	mm
B_0	10.00	± 0.10	mm
K_0	1.20	± 0.10	mm
t	0.30	± 0.05	mm

Reel Specifications

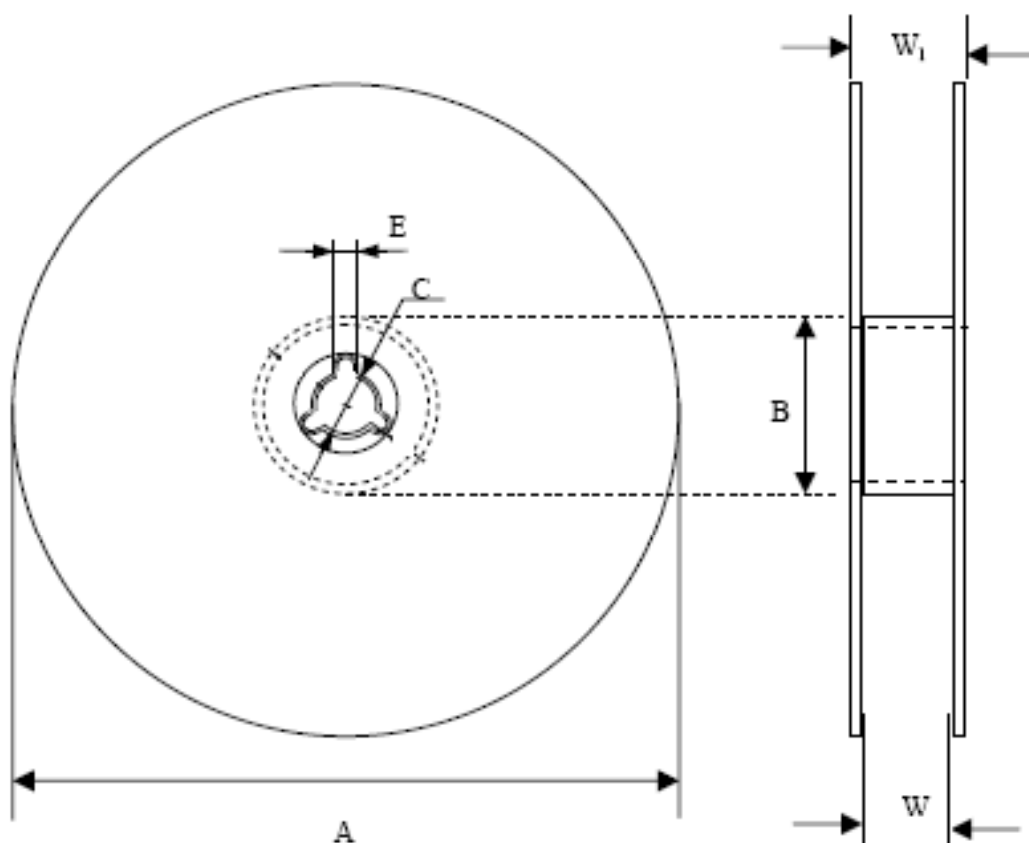

Quantity Per Reel	Tape Width (mm)	A (mm)	C (mm)	B (mm)	E (mm)	W (mm)	W ₁ (mm)
1,500	16	180±1	13.0±0.5	62±0.5	2.2±0.5	16±0.5	20±0.2