


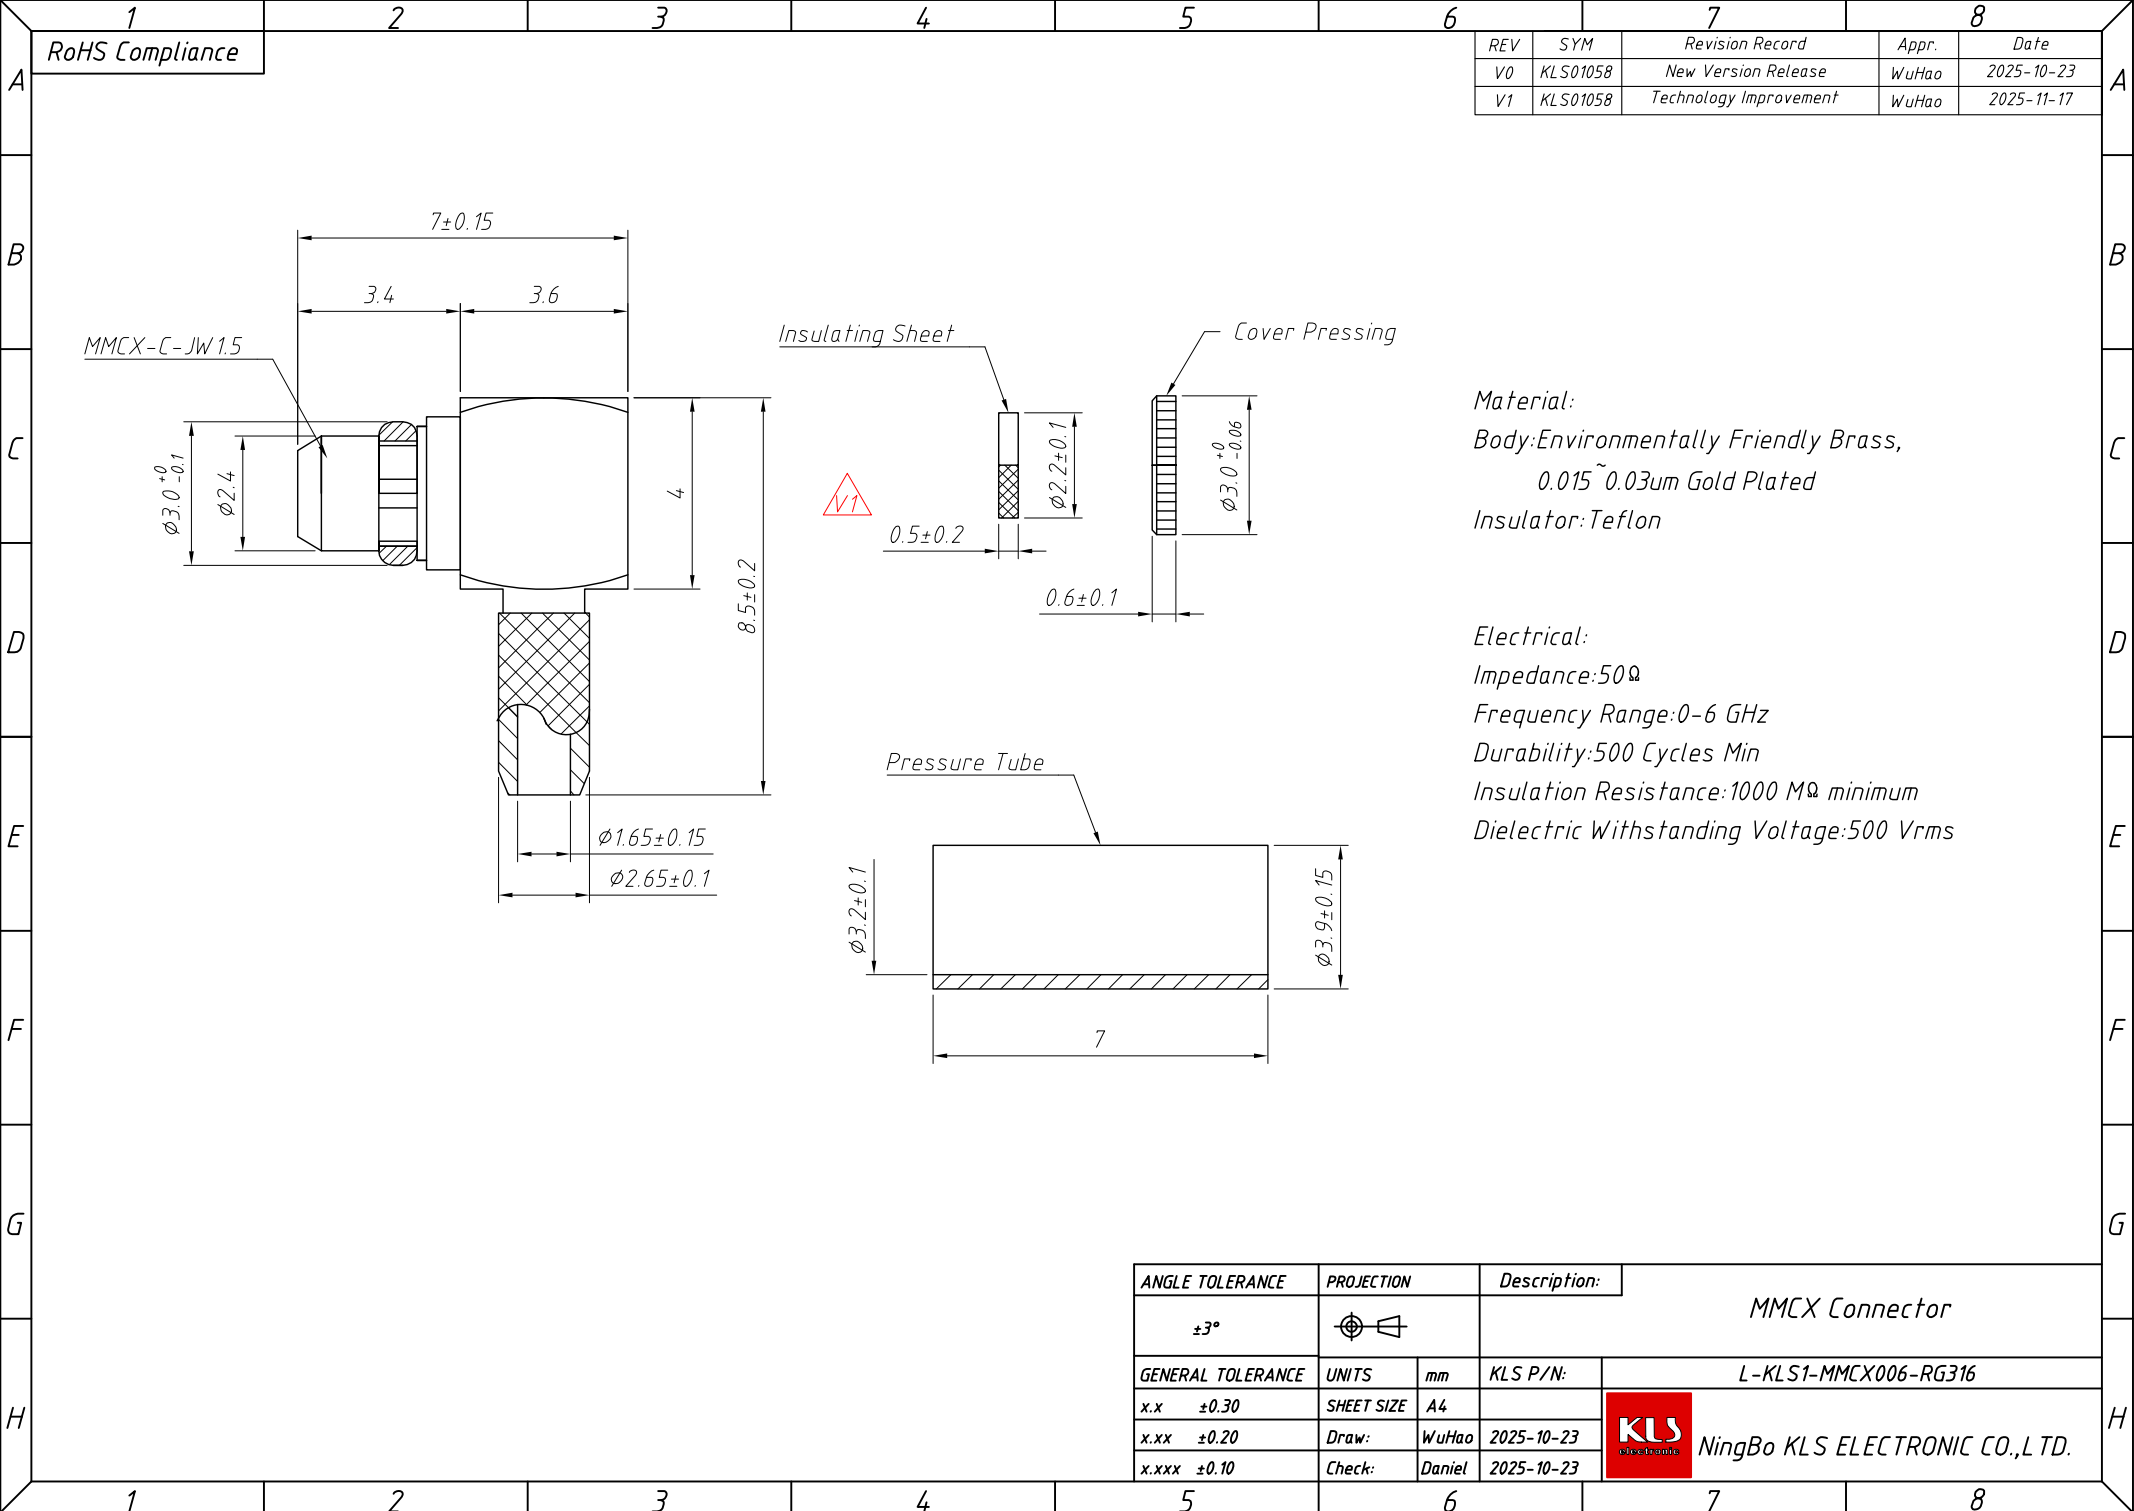

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01058	New Version Release	WuHao	2025-10-23
V1	KLS01058	Technology Improvement	WuHao	2025-11-17

Material:
Body: Environmentally Friendly Brass,
 $0.015 \sim 0.03 \mu\text{m}$ Gold Plated
Insulator: Teflon

Electrical:
Impedance: 50Ω
Frequency Range: $0 \sim 6 \text{ GHz}$
Durability: 500 Cycles Min
Insulation Resistance: $1000 \text{ M}\Omega$ minimum
Dielectric Withstanding Voltage: 500 Vrms

ANGLE TOLERANCE	PROJECTION	Description:	MMCX Connector	
$\pm 3^\circ$				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-MMCX006-RG316
x.x ± 0.30	SHEET SIZE	A4		
x.xx ± 0.20	Draw:	WuHao	2025-10-23	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ± 0.10	Check:	Daniel	2025-10-23	