


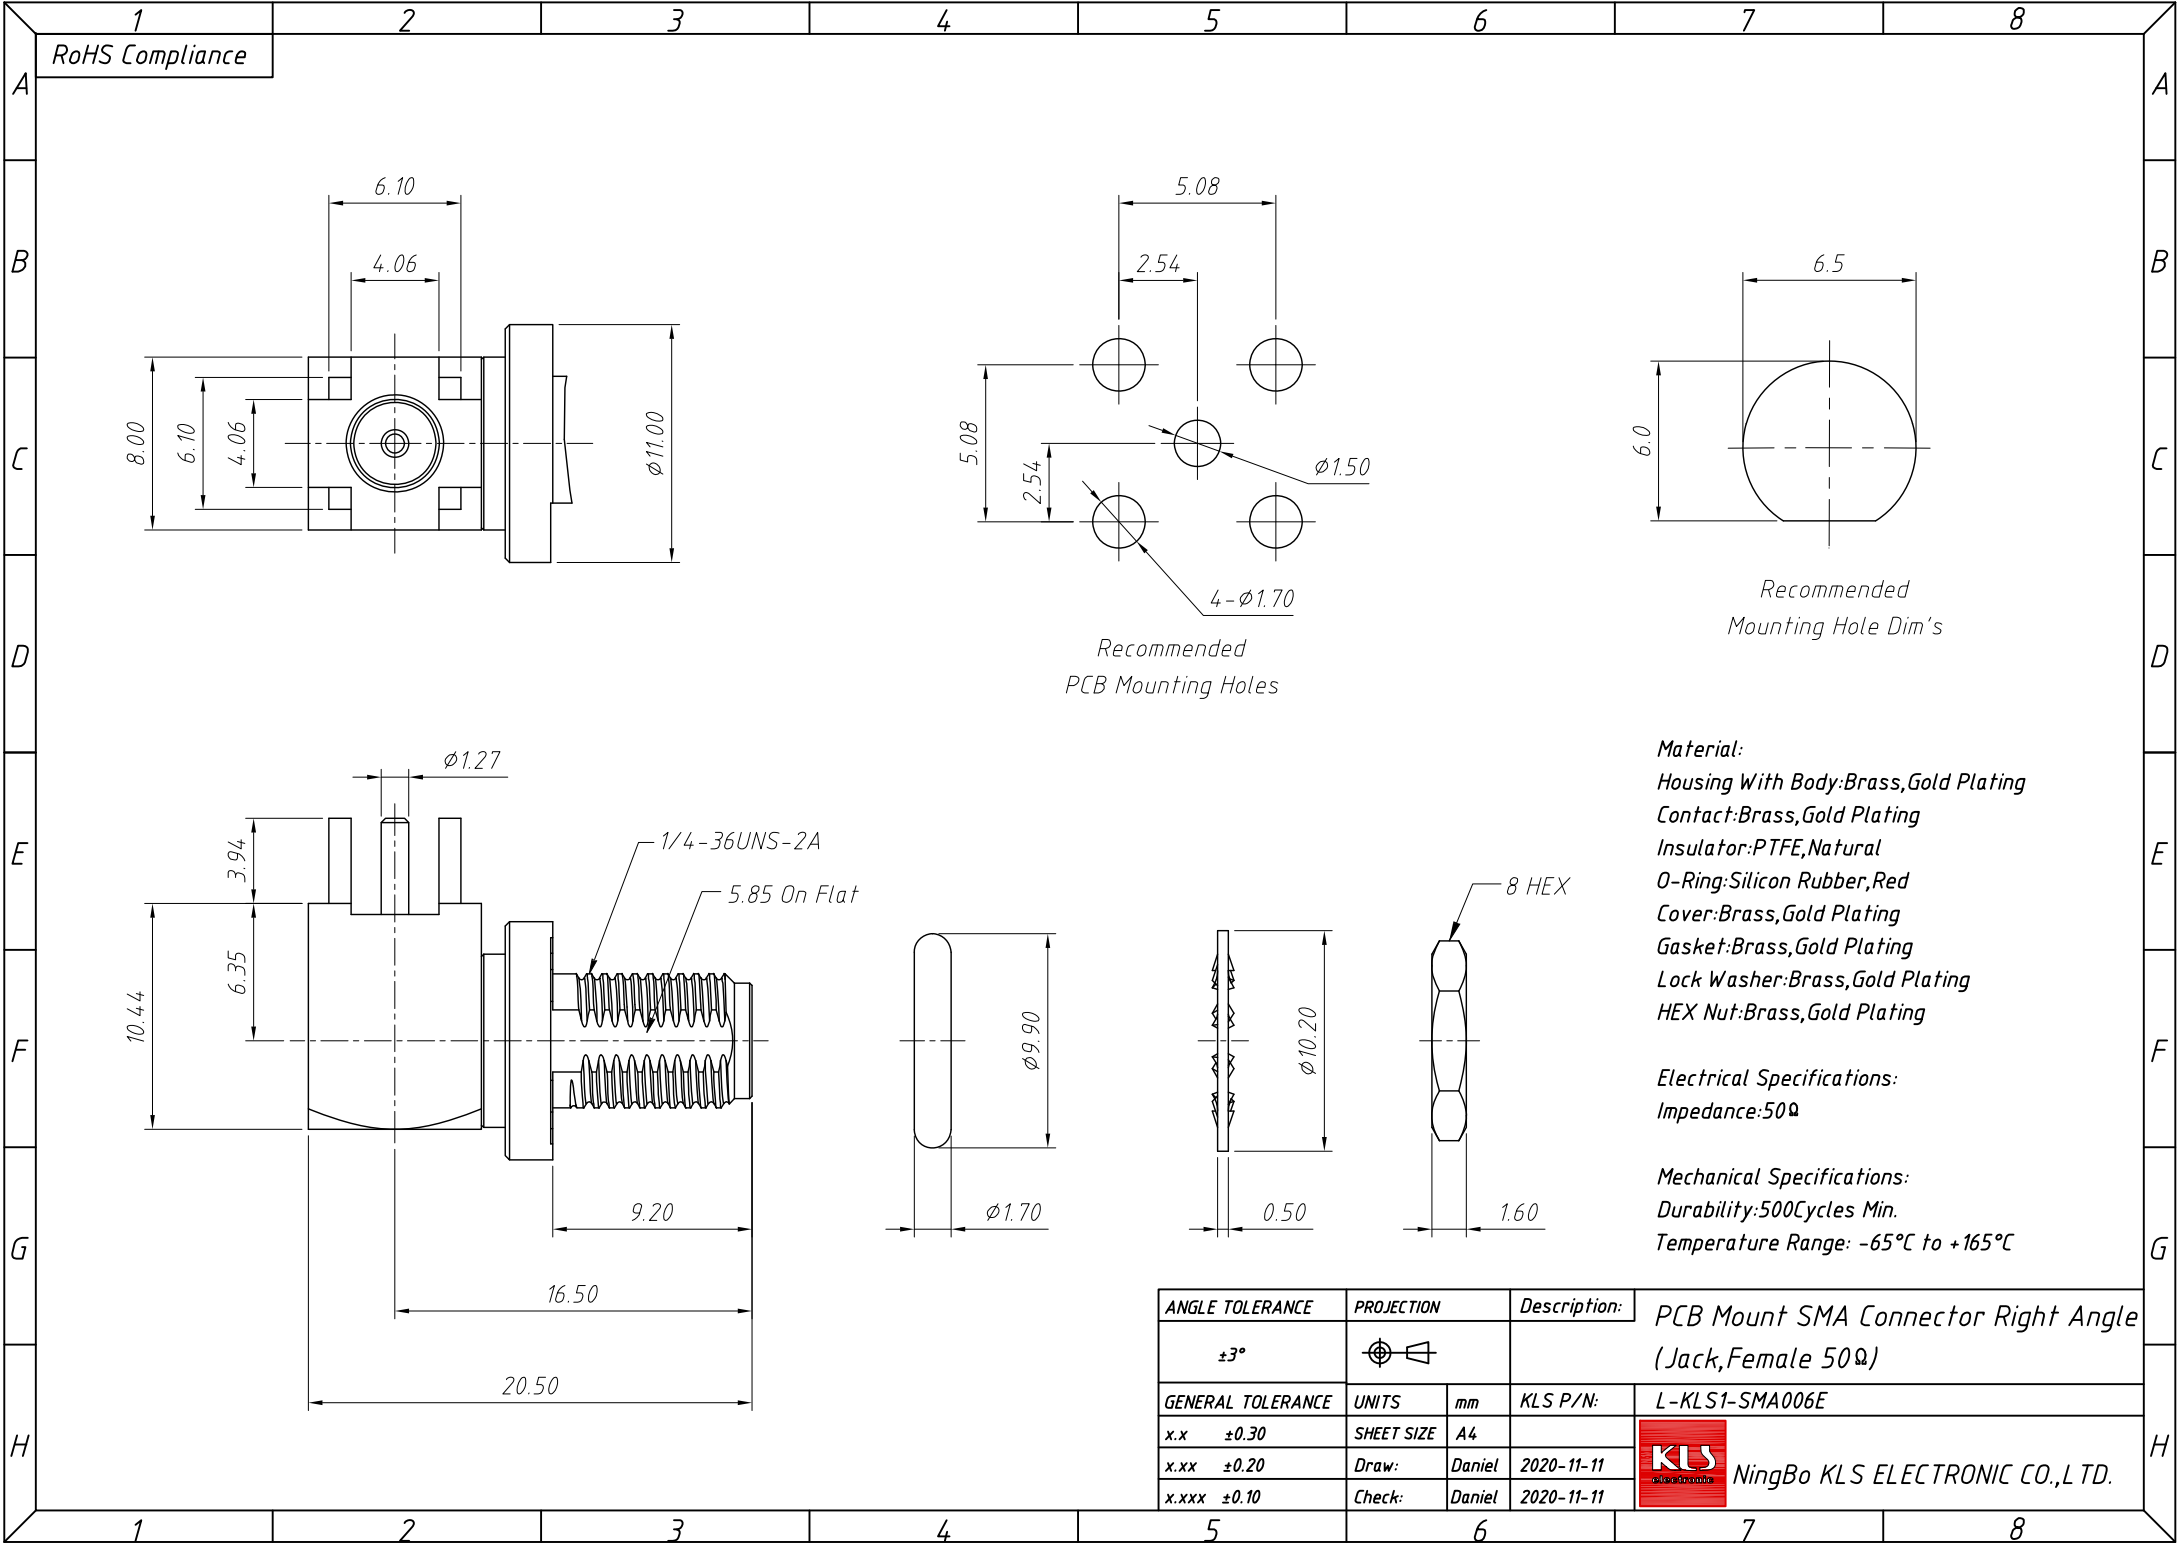


Material:
Housing With Body: Brass, Gold Plating
Contact: Brass, Gold Plating
Insulator: PTFE, Natural
O-Ring: Silicon Rubber, Red
Cover: Brass, Gold Plating
Gasket: Brass, Gold Plating
Lock Washer: Brass, Gold Plating
HEX Nut: Brass, Gold Plating


Electrical Specifications:
Impedance: 50Ω

Mechanical Specifications:
Durability: 500 Cycles Min.
Temperature Range: -65°C to +165°C

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PCB Mount SMA Connector Right Angle (Jack, Female 50Ω)	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	±0.30	SHEET SIZE	A4	L-KLS1-SMA006E	
x.xx	±0.20	Draw:	Daniel	2020-11-11	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx	±0.10	Check:	Daniel	2020-11-11	

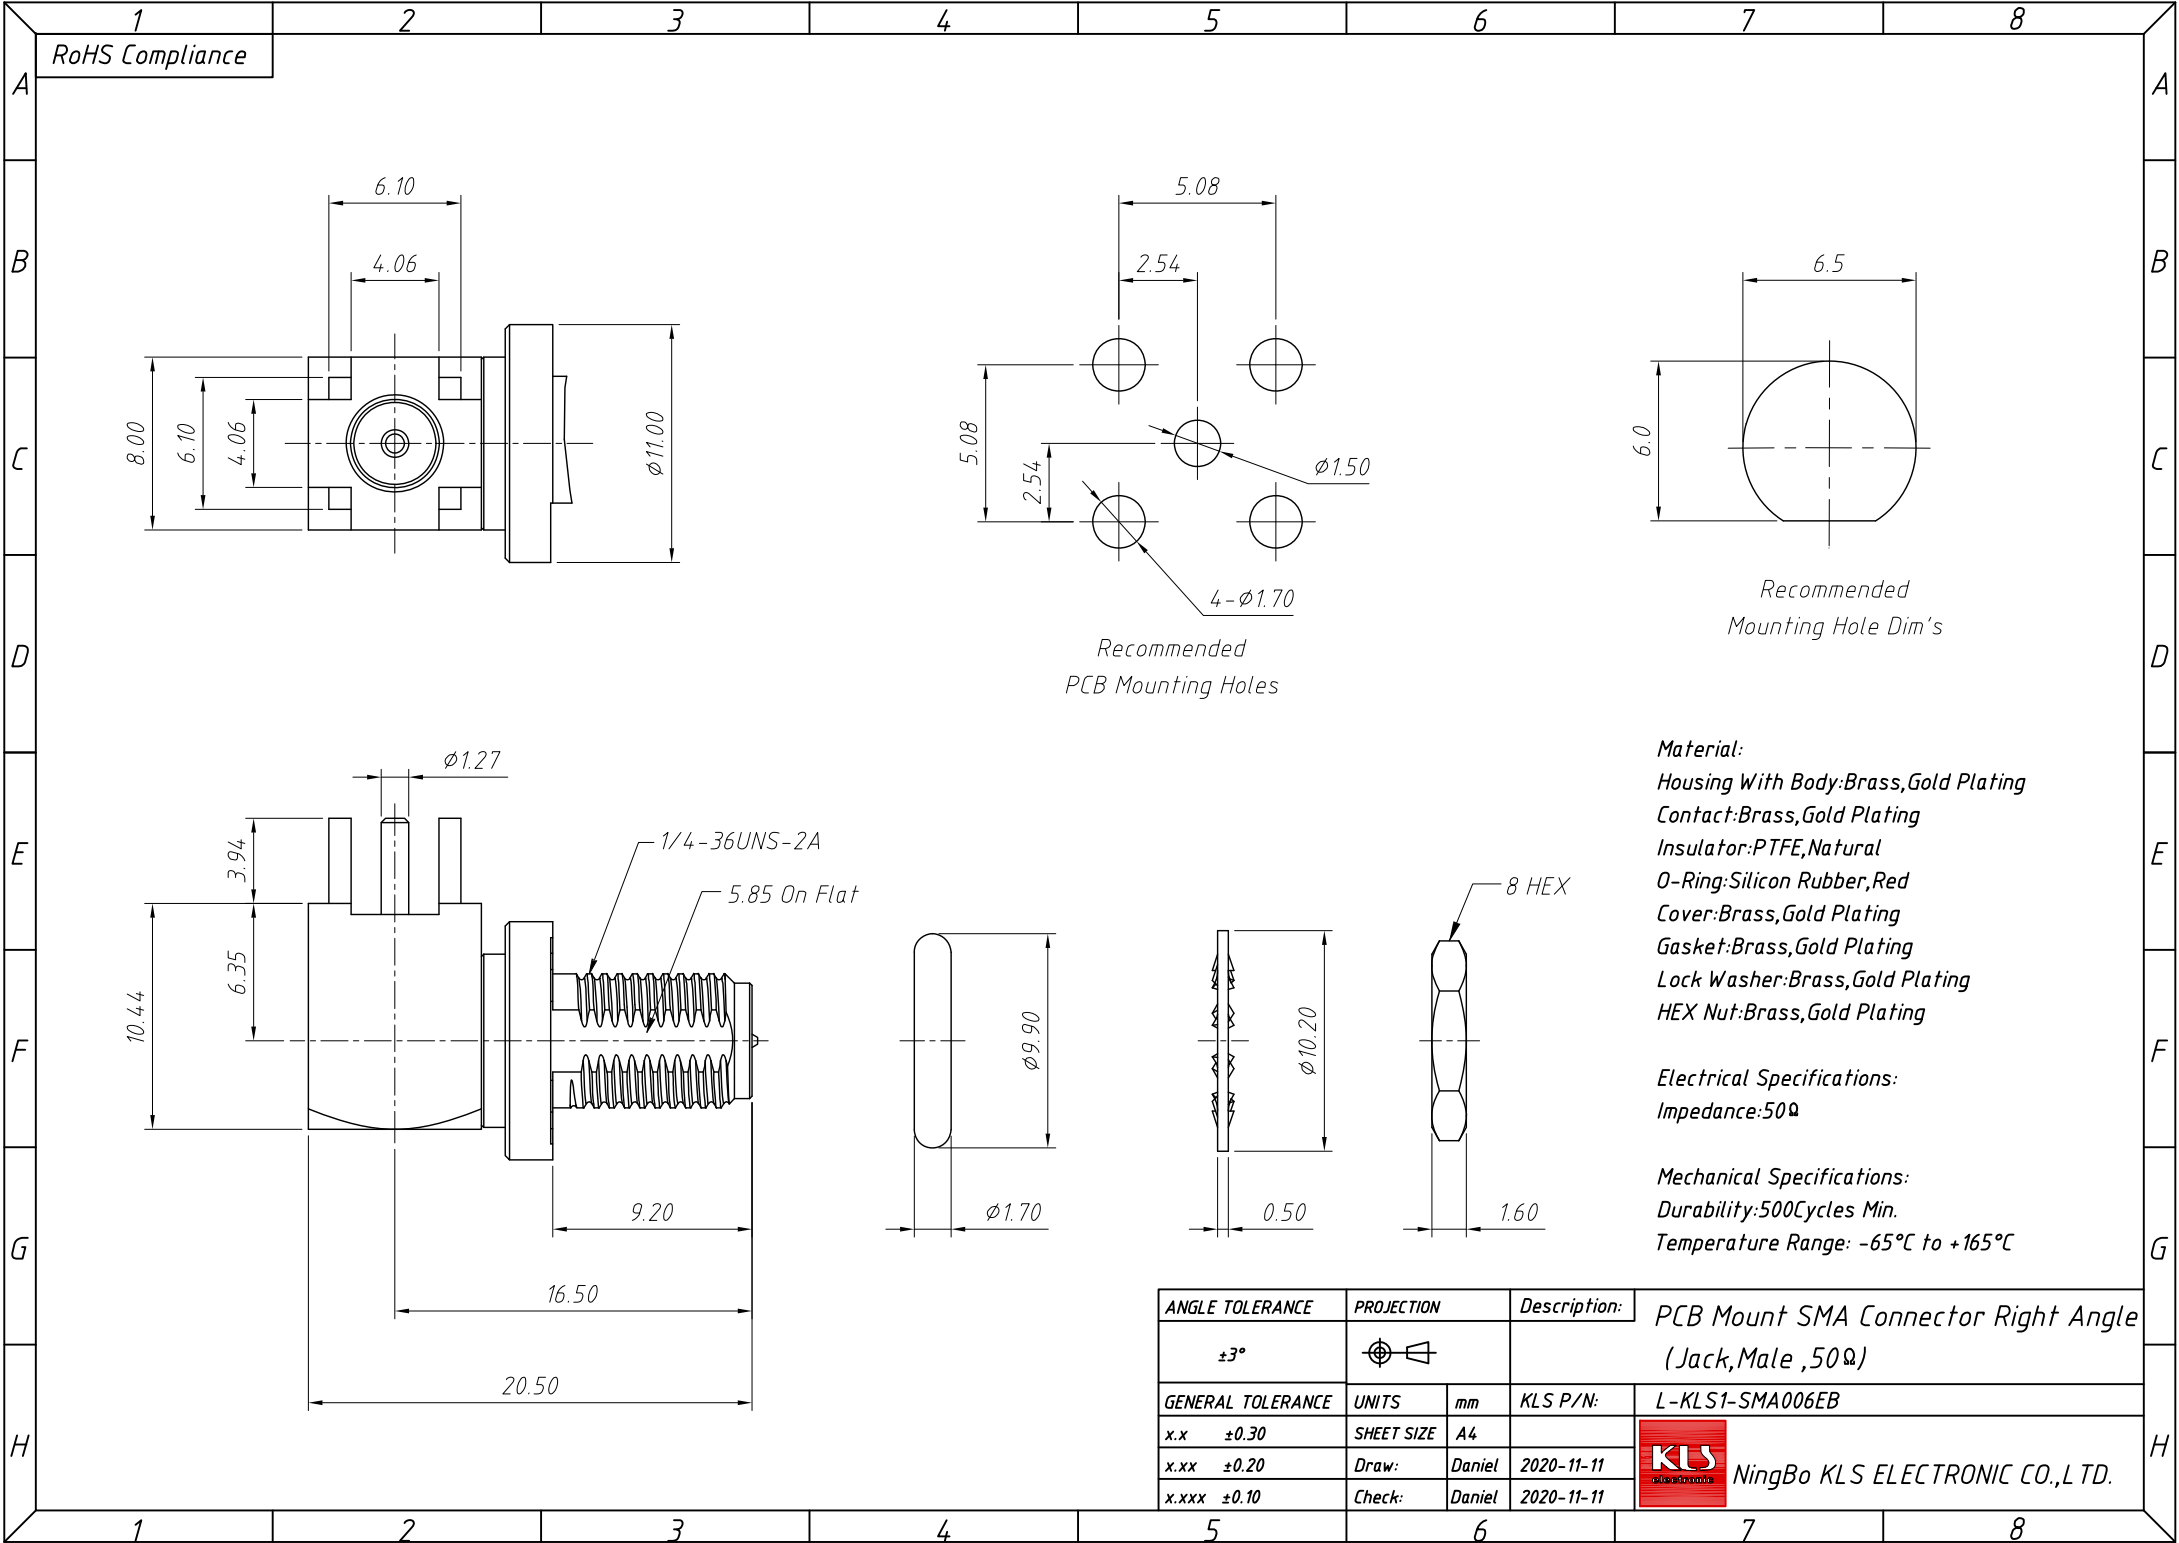

RoHS Compliance

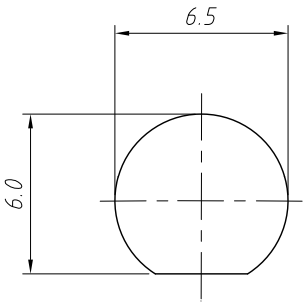

Recommended Mounting Hole Dim's

Material:
Housing With Body:Brass,Gold Plating
Contact:Brass,Gold Plating
Insulator:PTFE,Natural
O-Ring:Silicon Rubber,Red
Cover:Brass,Gold Plating
Gasket:Brass,Gold Plating
Lock Washer:Brass,Gold Plating
HEX Nut:Brass,Gold Plating

Electrical Specifications:
Impedance:50Ω

Mechanical Specifications:
Durability:500Cycles Min.
Temperature Range: -65°C to +165°C

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PCB Mount SMA Connector Right Angle (Jack, Male, 50Ω)	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-SMA006EB
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2020-11-11	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx	±0.10	Check:	Daniel	2020-11-11	