


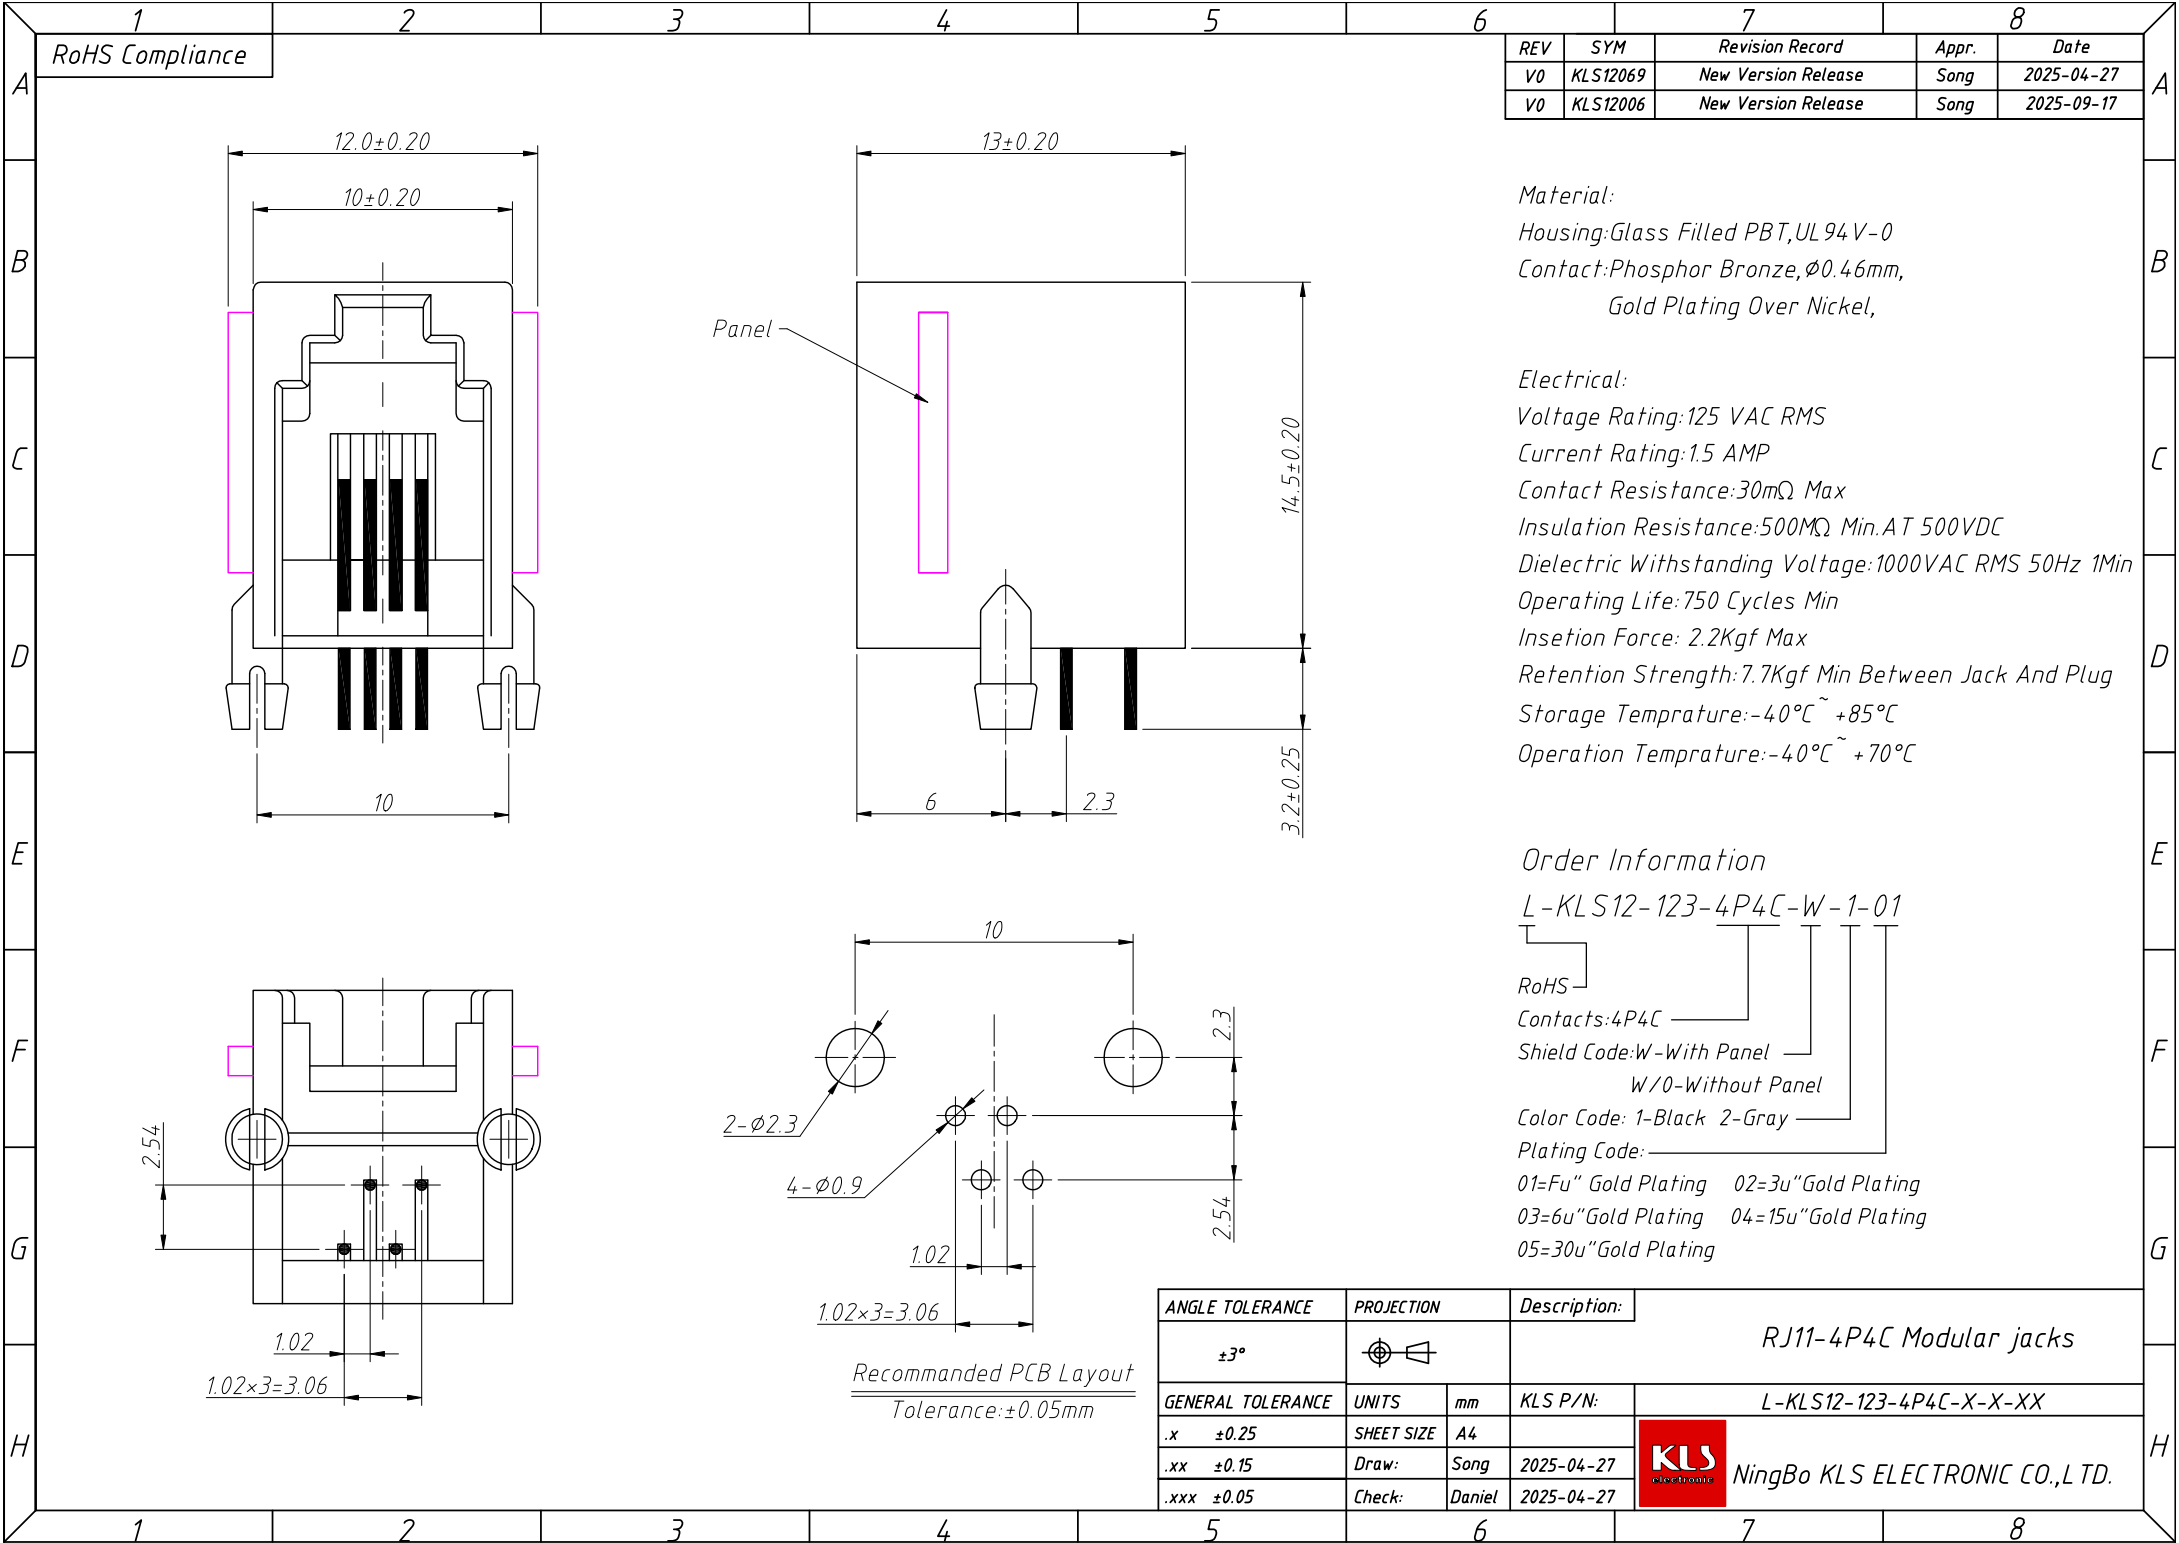

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS12069	New Version Release	Song	2025-04-27
V0	KLS12006	New Version Release	Song	2025-09-17

Material:

Housing:Glass Filled PBT,UL 94V-0
Contact:Phosphor Bronze,Ø0.46mm,
Gold Plating Over Nickel,

Electrical:

Voltage Rating:125 VAC RMS
Current Rating:1.5 AMP
Contact Resistance:30mΩ Max
Insulation Resistance:500MΩ Min.AT 500VDC
Dielectric Withstanding Voltage:1000VAC RMS 50Hz 1Min
Operating Life:750 Cycles Min
Insestion Force: 2.2Kgf Max
Retention Strength:7.7Kgf Min Between Jack And Plug
Storage Temperature:-40℃~ +85℃
Operation Temperature:-40℃~ +70℃

Order Information

L-KLS12-123-4P4C-W-1-01

RoHS
Contacts:4P4C
Shield Code:W-With Panel
W/O-Without Panel
Color Code: 1-Black 2-Gray
Plating Code:
01=Fu" Gold Plating 02=3u"Gold Plating
03=6u"Gold Plating 04=15u"Gold Plating
05=30u"Gold Plating

ANGLE TOLERANCE	PROJECTION	Description:
±3°		RJ11-4P4C Modular jacks
GENERAL TOLERANCE	UNITS	mm
.x ±0.25	SHEET SIZE	A4
.xx ±0.15	Draw:	Song
.xxx ±0.05	Check:	Daniel

KLS	NingBo KLS ELECTRONIC CO.,L TD.
-----	---------------------------------