

Order Information

L-KLS12-313C-8P8C-2X4-2-G/Y-01

RoHS

Contacts:8P8C

Ports2x4-8 Ports

Shielded:1-With Shielded

2-EMI Shielded 3-TOP EMI Shielded

LED Code:(LED L/LED R)

G-Green Y-Yellow GY-Yellow&Green R-Red

Plating Code:

01=Fu" Gold Plating 02=3u"Gold Plating

03=6u"Gold Plating 04=15u"Gold Plating

05=30u"Gold Plating XX=XXu"Gold Plating

Material:

Housing:PBT,UL 94V-0,Black

Contact:Ø0.46mm C51000 (QSn4-0.3)Phosphor Bronze,

Gold Plating Over Nickel

Shield: 0.20mm Thickness H65Y Brass,Nickel Plated

Electrical:

Voltage Rating:125 VAC RMS

Current Rating:1.5 AMP

Contact Resistance:30m Ω Max

Insulation Resistance:500M Ω MIN@500 VDC

Dielectric Withstanding Voltage:

1000VAC 50Hz Or 60Hz 1Min

Operating Life:750 Cycles Min

Mating/Unmating Force: 20N Max

Retention Strength:50N pendant 60±5s


Storage TEMP.: -40°C ~+85°C, Relative Humidity<70%

Operation TEMP.: -40°C ~+85°C

LED L GREEN






LED R YELLOW






LED L GREEN



LED R YELLOW

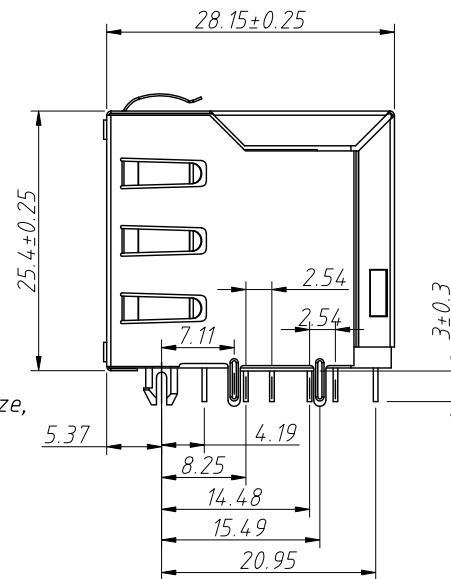

Detail A

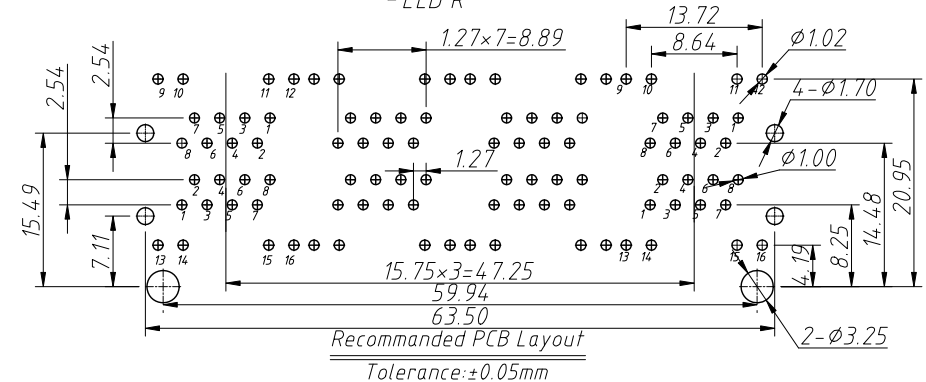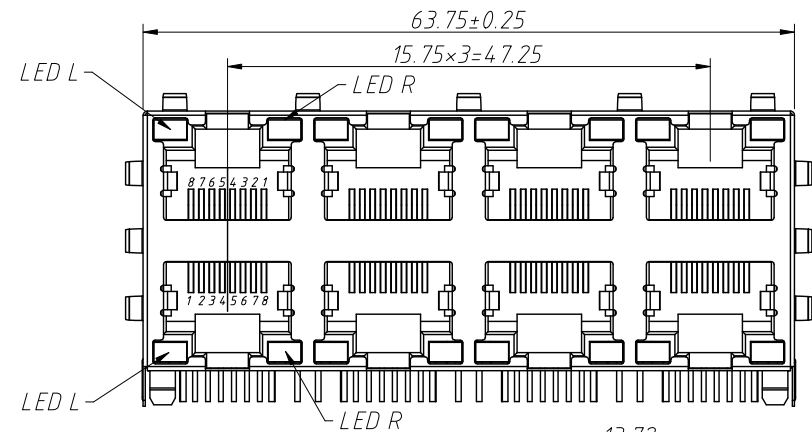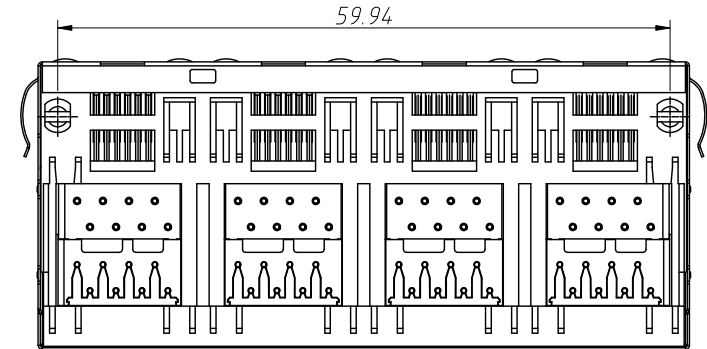

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Modular Jacks,RJ45-8P8C Jack,2x4 With Shielded,With LED
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Song
x.xxx ±0.10	Check:	Daniel

KLS	NingBo KLS ELECTRONIC CO.,L TD.
-----	---------------------------------