

# Product Specification

Number: L-KLS6-MOF-XW-XXR-XX

Name: Metal Oxide Film Fixed Resistors

Customer: \_\_\_\_\_

Date: 2025-09-30

Customer Signature:



[WWW.KLSELE.COM](http://WWW.KLSELE.COM)

## NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN  
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.

|       |        |        |         |
|-------|--------|--------|---------|
| Compi | Check  | Review | Approva |
| Jenny | Jack.C |        |         |

## 1. 一般事项 General

### 适用范围 Scope

本承认书适用于宁波开乐亿启电子有限公司之[金属氧化膜固定电阻器]。

This specification is available for Fixed Metal Oxide Film Resistors manufactured by NINGBO KLS ELECTRONIC CO.LTD

### 品质 Quality

本电阻器的制造系经高品质管理程式，并具有高信赖性的品质保证。

The resistor is manufactured by highly quality-controlled process and guaranteed high reliability.

### 标准试验状态 Standard measuring conditions

温度  $20 \pm 2^{\circ}\text{C}$ 、湿度  $65 \pm 5\%$ 。

但在温度  $5 \sim 35^{\circ}\text{C}$ 、湿度  $45 \sim 85\%$ 之情況下，仍可给予判定。

Temperature  $20 \pm 2^{\circ}\text{C}$ , Humidity  $65 \pm 5\%$ .

Being no doubt about the judgment, measurements can be made within the following Temperature

$5 \sim 35^{\circ}\text{C}$ , Humidity  $45 \sim 85\%$ .


### 形名 (例) Type designation (example)

依使用种类、额定电力、形状、公称电阻值、电阻值容许差而区别，其构造如下：

The type designation shall be in the following form and as specified.

## Order Information

L-KLS6-MOF- XW - XXR - X X

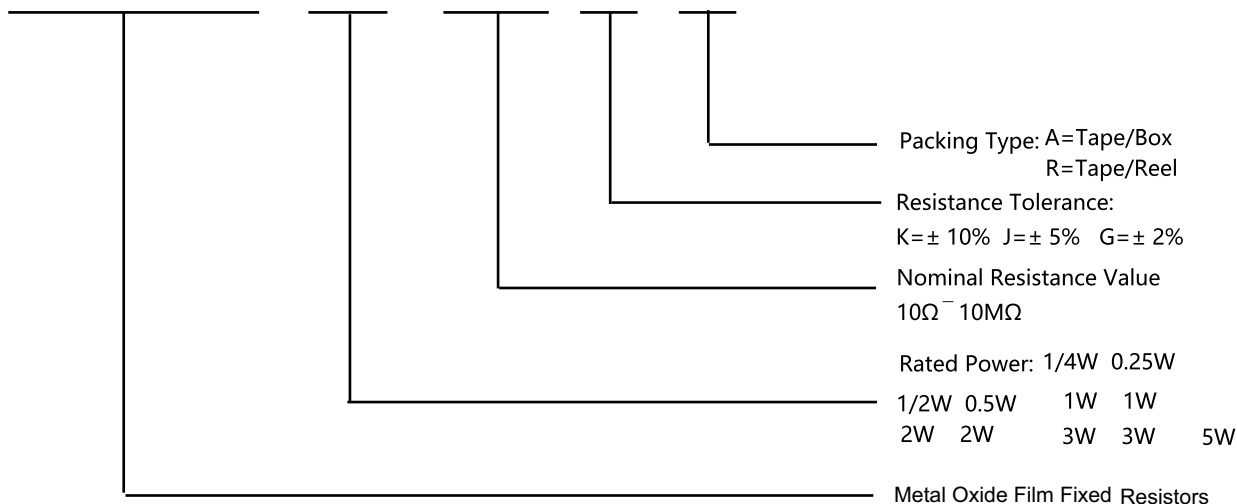

|                                                                                   |             |                                  |         |            |
|-----------------------------------------------------------------------------------|-------------|----------------------------------|---------|------------|
|  | Part name   | Metal oxide film fixed resistors | Date    | 2025-09-30 |
|                                                                                   | Part number | L-KLS6-MOF-XW-XXR-XX             | Edition | V1         |
|                                                                                   | Department  |                                  | Page    | 2 / 11     |

额定电力 Rated power


额定电力是适应在周围温度 70℃可以连续负载的最大电力，如表-1；但周围温度如超过 70℃时之额定电力则依图一的电力轻减曲线实施。

Rated power is maximum power which can be continuously loaded at specified ambient temperature 70℃, however when the ambient temperature exceeds 70℃, rated power should be determined from the derating curve of Fig.1.

表-1 T able-1



| 种类<br>Type  |           | 额定<br>电力<br>Rated<br>power | 最 高<br>使用电压<br>Maximum<br>working<br>voltage | 最 高<br>过负荷电压<br>Maximum<br>overload<br>voltage | 最 高<br>断续电压<br>Maximum<br>pulse<br>voltage | 耐电压<br>Dielectric<br>withstandi<br>ng voltage | 电阻值范围<br>Resistance<br>range | 使用温度范围<br>Operating<br>temperature range |
|-------------|-----------|----------------------------|----------------------------------------------|------------------------------------------------|--------------------------------------------|-----------------------------------------------|------------------------------|------------------------------------------|
| Normal size | MOF-1/4W  | 0.25W                      | 200V                                         | 350V                                           | 500V                                       | 200V                                          | 10Ω～22KΩ                     | -55℃～155℃                                |
|             | MOF-1/2W  | 0.5W                       | 250V                                         | 400V                                           | 500V                                       | 250V                                          | 10Ω～75KΩ                     |                                          |
|             | MOF-1W    | 1W                         | 350V                                         | 600V                                           | 750V                                       | 350V                                          | 10Ω～100KΩ                    |                                          |
|             | MOF-2W    | 2W                         | 350V                                         | 600V                                           | 750V                                       | 350V                                          | 10Ω～120KΩ                    |                                          |
|             | MOF-3W    | 3W                         | 350V                                         | 600V                                           | 750V                                       | 350V                                          | 10Ω～120KΩ                    |                                          |
|             | MOF-5W    | 5W                         | 500V                                         | 1000V                                          | 1500V                                      | 700V                                          | 10Ω～120KΩ                    |                                          |
| Sma ze      | MOF-1/2WS | 0.5W                       | 250V                                         | 400V                                           | 500V                                       | 250V                                          | 10Ω～22KΩ                     |                                          |
|             | MOF-1WS   | 1W                         | 350V                                         | 600V                                           | 750V                                       | 350V                                          | 10Ω～68KΩ                     |                                          |
|             | MOF-2WS   | 2W                         | 350V                                         | 600V                                           | 750V                                       | 350V                                          | 10Ω～68KΩ                     |                                          |
|             | MOF-3WS   | 3W                         | 350V                                         | 600V                                           | 750V                                       | 350V                                          | 10Ω～100KΩ                    |                                          |

图一 电力轻减曲线 Figure 1 Power derating curve

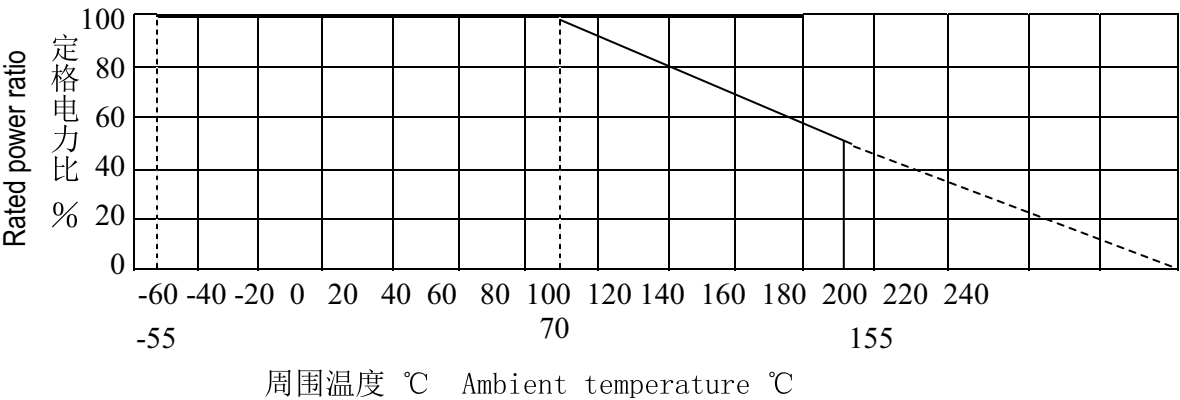

|                                      |             |                                  |         |            |
|--------------------------------------|-------------|----------------------------------|---------|------------|
| <div>KLS</div> <div>electronic</div> | Part name   | Metal oxide film fixed resistors | Date    | 2025-09-30 |
|                                      | Part number | L-KLS6-MOF-XW-XXR-XX             | Edition | V1         |
|                                      | Department  |                                  | Page    | 3 / 11     |

图二 表面温度上升 Figure 2 Surface temperature rise

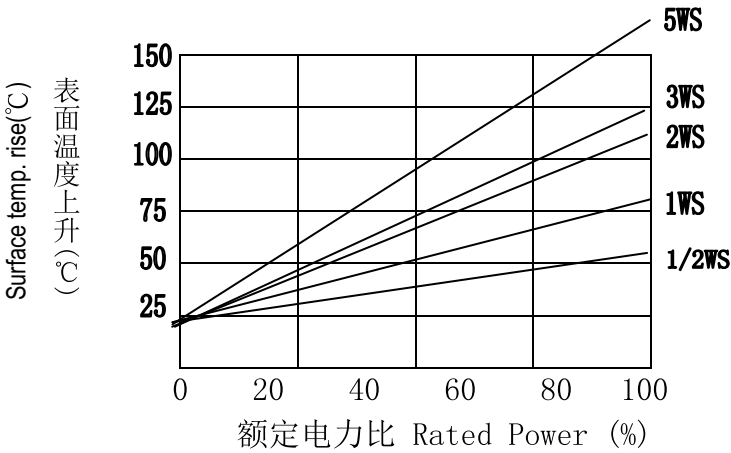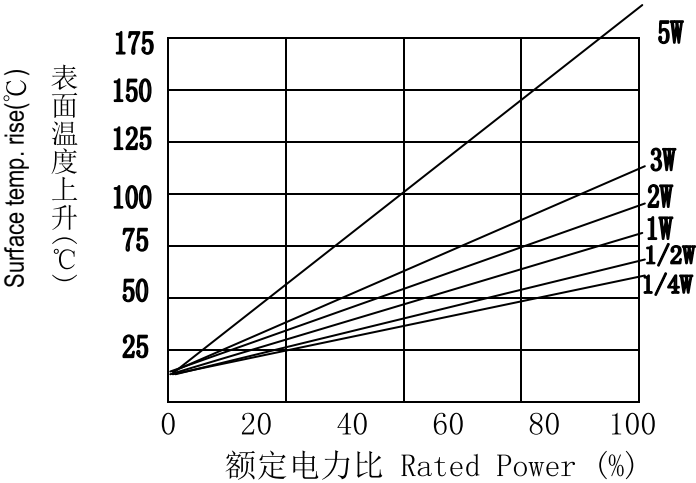

|                                                                                   |             |                                  |         |            |
|-----------------------------------------------------------------------------------|-------------|----------------------------------|---------|------------|
|  | Part name   | Metal oxide film fixed resistors | Date    | 2025-09-30 |
|                                                                                   | Part number | L-KLS6-MOF-XW-XXR-XX             | Edition | V1         |
|                                                                                   | Department  |                                  | Page    | 4 / 11     |

额定电压 Rated voltage

额定电压是指对应于额定电力的直流或交流（商用频率之有效值）的电压，由下式求得。  
The rated voltage shall be the D.C. or A.C. (R.M.S. at power frequency) voltage which corresponds the rated power and the value of which is calculated from the formula below.

$$E = \sqrt{P \cdot R}$$

Where

E

:

额定电压 Rated voltage (V)

P

:

额定电力 Rated power (W)

R

:

公称电阻值 Nominal resistance ( Ω )

公称电阻值 Nominal resistance values

公称电阻值是按表-2 之数乘以 10<sup>n</sup> (n 为整数) 之数值，其单位为欧姆(Ω)。  
公称电阻值之范围则按表-1 所示。

The nominal resistance values shall be the numerical values given in Table-2 multiplied by 10<sup>n</sup> (n is an integer) in the unit of ohm(Ω).  
The minimum resistance and maximum resistance shall be as given in Table-1.


表-2 电阻值有效数字的标准 T able-2 Standard nominal resistance values

| 系列名<br>Name of series | 标准公称电阻值（为有效数字，单位省略）<br>Standard nominal resistance values (significant figures with the unit omitted)                                                                                                                                                                                         |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| E－6                   | 1.0, 1.5, 2.2, 3.3, 4.7, 6.8                                                                                                                                                                                                                                                                  |
| E－12                  | 1.0, 1.2, 1.5, 1.8, 2.2, 2.7, 3.3, 3.9, 4.7, 5.6, 6.8, 8.2                                                                                                                                                                                                                                    |
| E－24                  | 1.0, 1.1, 1.2, 1.3, 1.5, 1.6, 1.8, 2.0, 2.2, 2.4, 2.7, 3.0<br>3.3, 3.6, 3.9, 4.3, 4.7, 5.1, 5.6, 6.2, 6.8, 7.5, 8.2, 9.1                                                                                                                                                                      |
| E－48                  | 1.00, 1.05, 1.10, 1.15, 1.21, 1.27, 1.33, 1.40, 1.47, 1.54, 1.62, 1.69, 1.78, 1.87, 1.96, 2.05, 2.15, 2.26, 2.37, 2.49, 2.61, 2.74, 2.87, 3.0, 3.16, 3.32, 3.48, 3.65, 3.83, 4.02, 4.22, 4.42, 4.64, 4.87, 5.11, 5.36, 5.62, 5.90, 6.19, 6.49, 6.81, 7.15, 7.50, 7.87, 8.25, 8.66, 9.09, 9.53 |

|             |                                  |         |            |
|-------------|----------------------------------|---------|------------|
| Part name   | Metal oxide film fixed resistors | Date    | 2025-09-30 |
| Part number | L-KLS6-MOF-XW-XXR-XX             | Edition | V1         |
| Department  |                                  | Page    | 5 / 11     |

构造图 Structure diagram

MOF 系列之氧化金属皮膜固定电阻器是按下表的材料而构成：  
The construction of resistor (MOF series) shall be as follows:

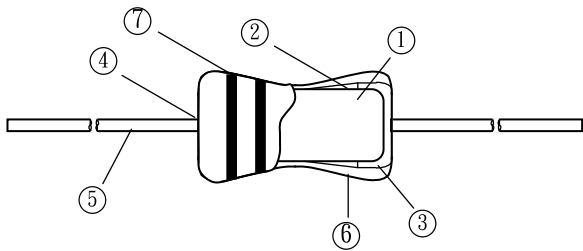

| 号码<br>No. | 构造名称<br>Item               | 内 容<br>Material                                                                                              |
|-----------|----------------------------|--------------------------------------------------------------------------------------------------------------|
| 1         | 基体磁器<br>Ceramic core       | 使用高含铝量的瓷器棒。<br>High alumina ceramic is used.                                                                 |
| 2         | 电阻体<br>Resistance element  | 电阻体的成份是使用氧化金属皮膜。<br>The resistor element shall consist of metal oxide film.                                  |
| 3         | 端子<br>Terminal             | 铁帽。<br>Tinned iron cap.                                                                                      |
| 4         | 连接<br>Connection           | 导线对铁帽须以电气熔接。<br>The lead wire, which is plated with solder, shall be mounted to the caps by welding process. |
| 5         | 导线<br>Lead wire            | 焊锡或镀锡铁引线。不含铅<br>Soldered or tinned iron lead. Lead free                                                      |
| 6         | 上涂涂装<br>Finishing painting | 使用矽树脂涂料。<br>Silicone resin is used.                                                                          |
| 7         | 表示<br>Indication           | 色码。<br>Color code.                                                                                           |

|             |                                  |         |            |
|-------------|----------------------------------|---------|------------|
| Part name   | Metal oxide film fixed resistors | Date    | 2025-09-30 |
| Part number | L-KLS6-MOF-XW-XXR-XX             | Edition | V1         |
| Department  |                                  | Page    | 6 / 11     |

铁帽端子 Terminal caps

铁帽端子须确实地连接（电气的及机械的）于电阻体上。  
 The caps shall be securely connected with the resistor element electrically and mechanically.

涂装 Painting

本体必须依照试样书之规定以绝缘涂料绝缘之。  
 Coating in accordance with specification insulates the body.

外装色泽 Resistor body color

表-3 Table-3

| 种类 Type | 颜色 Color   | 种类 Type | 颜色 Color   |
|---------|------------|---------|------------|
| MOF     | 灰色<br>Grey | MOFS    | 灰色<br>Grey |

表示 Indication

参照本仕様书的「3. 表示」。  
 The indication shall be satisfied with 「3. Indication」.

## 2. 特性 Characteristics


表-4 T able-4

| 项目<br>Item                                | 规格值<br>Performance                                                                                   | 试验方法 ( 依据 JIS C 5202)<br>Test methods (Conform to JIS C 5202)                                                                                                                                                                                                                                                                                               |
|-------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 温度系数<br>Temperature coefficient           | ±350ppw°C 以内<br>within±350ppw                                                                        | 5.2 项参照 Comply with 5.2<br>$\frac{R_1 - R_0}{R_0} \times 10^6 \frac{T_1 - T_0}{(PPM/^\circ C)}$ R <sub>0</sub> :室温 (T <sub>0</sub> ) 所测量之电阻值。<br>R <sub>1</sub> :室温+100℃ (T <sub>1</sub> ) 后所测量之电阻值。<br>R <sub>0</sub> : Resistance value at room temp. (T <sub>0</sub> ).<br>R <sub>1</sub> : Resistance value at room temp. plus 100℃ (T <sub>1</sub> ).一 |
| 短时间过负荷<br>Short time overload             | ±(1%+0.05Ω)以内<br>不得有机械的损伤<br>within±(1%+0.05Ω)<br>NO evidence of mechanical damage.                  | 5.5 项参照 Comply with 5.5<br>额定电压 X 2.5 倍, 5 秒。<br>不可超过最高过负荷电压 (见表-1)<br>Rated voltage X 2.5 times, 5s<br>But not to exceed maximum overload voltage.<br>(See table-1)                                                                                                                                                                                        |
| 绝缘抵抗<br>Insulation resistance             | 10 <sup>4</sup> MΩ 以上。<br>10 <sup>4</sup> MΩ or more                                                 | 5.6 项参照 Com ply with 5.6<br>置于 V 型槽方法。<br>施加个别规定之直流电压 60 秒。<br>V-block method<br>Resistor shall be tested at DC potential<br>respectively for 60 seconds.                                                                                                                                                                                                   |
| 耐电压<br>Dielectric withstanding<br>voltage | 无电弧放电、烧损及绝缘破坏等异状。<br>No evidence of flashover mechanical damage,<br>arcing or insulation breakdown.  | 5.7 项参照 Comply with 5.7<br>常压, 置于 V 型槽方法。<br>施加个别规定之交流电压 60 秒。(见表-1)<br>Constant pressure, V-block method<br>Resistor shall be tested at AC potential<br>respectively for 60 seconds.(See table-1)                                                                                                                                                          |
| 断续过负荷<br>Pulse overload                   | MOF : ±(2%+0.1Ω) 以内。<br>MOFS : ±(5%+0.1Ω) 以内。<br>MOF : within ±(2%+0.1Ω)<br>MOFS : within ±(5%+0.1Ω) | 5.8 项参照 Comply with 5.8<br>额定电压 X 4 倍, 10000 回 (1 秒 ON, 25 秒 OFF)。<br>不可超过最高断续电压 (见表-1)<br>Rated voltage X 4 times, 10000 cyc.(1s ON, 25s OFF)<br>But not to exceed maximum pulse voltage.(See table-1)                                                                                                                                                     |
| 端子强度<br>Terminal strength                 | 端子不得断裂及松弛。<br>No evidence of mechanical damage.                                                      | 6.1 项参照 Comply with 6.1<br>引张强度: 25N(2.5Kgf), 保持 10 秒。<br>Tensile strength: 25N(2.5kgf), for 10 seconds.<br>扭转强度: 360° 交互回转 5 回。<br>Torsional strength: Rotated through 360°, 5 rotations.                                                                                                                                                                  |


|             |                                  |         |            |
|-------------|----------------------------------|---------|------------|
| Part name   | Metal oxide film fixed resistors | Date    | 2025-09-30 |
| Part number | L-KLS6-MOF-XW-XXR-XX             | Edition | V1         |
| Department  |                                  | Page    | 8 / 11     |

| 项目<br>Item                            | 规格值<br>Performance                                                                                          | 试验方法 (依据 JIS C 5202)<br>Test methods (Conform to JIS C 5202)                                                                                                                                                                                                 |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 焊锡耐热性<br>Resistance to soldering heat | $\pm(1\%+0.05\Omega)$ 以内。<br>不得有机械的损伤。<br>within $\pm(1\%+0.05\Omega)$<br>No evidence of mechanical damage. | 6.4 项参照 Comply with 6.4<br>350 $\pm$ 10 $^{\circ}$ C, 3+0.5/-0 秒, 试验后放置 3 小时。<br>350 $\pm$ 10 $^{\circ}$ C, 3+0.5/-0s<br>After test leave for 3h.                                                                                                            |
| 焊锡附着性<br>Solderability                | 导线至少 95%以上新锡覆盖。<br>Covered with new solder by 95% at least.                                                 | 6.5 项参照 Comply with 6.5<br>焊锡温度: 235 $\pm$ 5 $^{\circ}$ C。<br>浸锡时间: 5 $\pm$ 0.5 秒。<br>Test temperature of solder: 235 $\pm$ 5 $^{\circ}$ C<br>Dipping time in solder: 5 $\pm$ 0.5s                                                                           |
| 耐溶剂性<br>Resistance to solvent         | 涂装及色码不得脱落。<br>No deterioration of protective coating and markings.                                          | 6.9 项参照 Comply with 6.9<br>放入异丙醇溶剂之超音波机内, 保持 3 分钟点。<br>Specimens shall be immersed in a bath of isopropyl alcohol completely for 3 minutes with ultrasonic.                                                                                                  |
| 温度循环<br>Temperature cycle             | $\pm(1\%+0.05\Omega)$ 以内。<br>不得有机械的损伤。<br>within $\pm(1\%+0.05\Omega)$<br>No evidence of mechanical damage. | 7.4 项参照 Comply with 7.4<br>低温侧: -55 $^{\circ}$ C/30 分, 室温: 10~15 分钟<br>高温侧: +85 $^{\circ}$ C/30 分, 室温: 10~15 分钟<br>5 回<br>Low side: -55 $^{\circ}$ C/30min, Room temp.: 10 to 15min<br>High side: 85 $^{\circ}$ C/30min, Room temp.: 10 to 15min<br>5 cycles |
| 耐湿负荷寿命<br>Load life in humidity       | $\pm(5\%+0.1\Omega)$ 以内。<br>within $\pm(5\%+0.1\Omega)$                                                     | 7.9 项参照 Comply with 7.9<br>40 $\pm$ 2 $^{\circ}$ C, 湿度 90~95%, 1000 小时<br>定格电压 (90 分钟 ON, 30 分钟 OFF)<br>40 $\pm$ 2 $^{\circ}$ C, 90 to 95%RH, 1000h<br>Rated voltage (90 min ON, 30 min OFF)                                                                 |
| 负荷寿命<br>Load life                     | $\pm(5\%+0.1\Omega)$ 以内。<br>within $\pm(5\%+0.1\Omega)$                                                     | 7.10 项参照 Comply with 7.10<br>70 $\pm$ 3 $^{\circ}$ C, 1000 小时<br>定格电压 (90 分钟 ON, 30 分钟 OFF)<br>70 $\pm$ 3 $^{\circ}$ C, 1000h<br>Rated voltage (90 min ON, 30 min OFF)                                                                                       |
| 耐炎性<br>Flame retardant                | 火炎的持续时间: 10 秒以下。<br>Burning duration: within 10 s                                                           | 7.12 项参照 Comply with 7.12<br>15 秒, 5 回<br>15 s, 5 times                                                                                                                                                                                                      |

3. 表示 Indication  
色码 Color Code

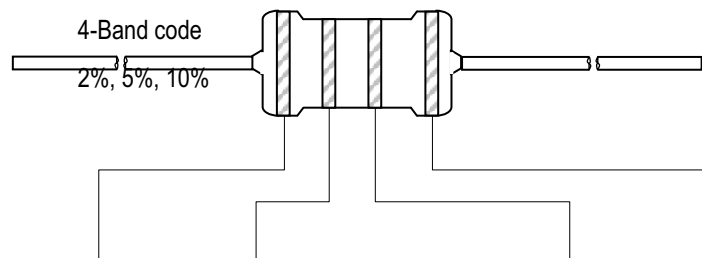

| 颜色 Color | 第 1 数字<br>1 <sup>st</sup> figure | 第 2 数字<br>2 <sup>nd</sup> figure | 第 3 数字<br>3 <sup>rd</sup> figure | 倍 率<br>Multiplier | 误差率<br>Tolerance |
|----------|----------------------------------|----------------------------------|----------------------------------|-------------------|------------------|
| 黑 Black  | 0                                | 0                                | 0                                | 10 <sup>0</sup>   |                  |
| 棕 Brown  | 1                                | 1                                | 1                                | 10 <sup>1</sup>   | ±1% (F)          |
| 红 Red    | 2                                | 2                                | 2                                | 10 <sup>2</sup>   | ±2% (G)          |
| 橙 Orange | 3                                | 3                                | 3                                | 10 <sup>3</sup>   |                  |
| 黄 Yellow | 4                                | 4                                | 4                                | 10 <sup>4</sup>   |                  |
| 绿 Green  | 5                                | 5                                | 5                                | 10 <sup>5</sup>   |                  |
| 蓝 Blue   | 6                                | 6                                | 6                                | 10 <sup>6</sup>   |                  |
| 紫 Violet | 7                                | 7                                | 7                                | 10 <sup>7</sup>   |                  |
| 灰 Gray   | 8                                | 8                                | 8                                |                   |                  |
| 白 White  | 9                                | 9                                | 9                                |                   |                  |
| 金 Gold   |                                  |                                  |                                  | 10 <sup>-1</sup>  | ±5% (J)          |
| 银 Silver |                                  |                                  |                                  | 10 <sup>-2</sup>  | ±10% (K)         |
| 无 Plain  |                                  |                                  |                                  |                   | ±20% (M)         |

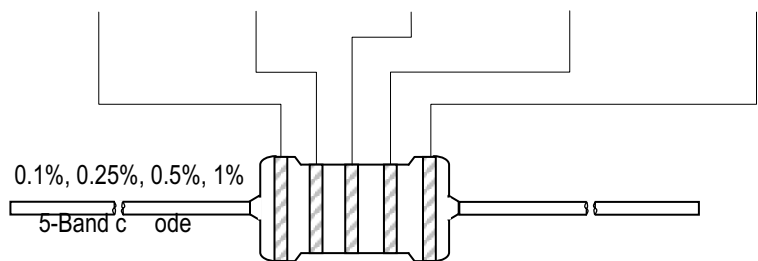


|             |                                  |         |            |
|-------------|----------------------------------|---------|------------|
| Part name   | Metal oxide film fixed resistors | Date    | 2025-09-30 |
| Part number | L-KLS6-MOF-XW-XXR-XX             | Edition | V1         |
| Department  |                                  | Page    | 10 / 11    |

4. 包装方式 Packaging Method


编带 盒装A形 A Tape/Box(Horizontal Forming)

散装 B 形与卧式 MB 形系列 B type(Horizontal Forming) & MB Form series


编带 盒装A形 A Tape/Box

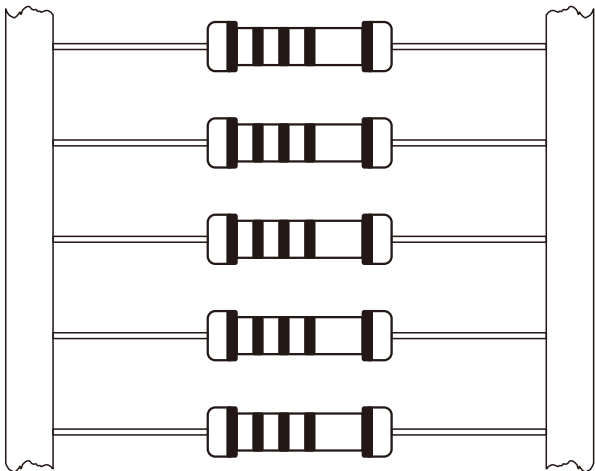

散装卧式MB形 Bulk horizontal MB type

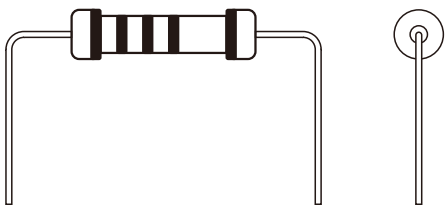

散装B形 Bulk B type



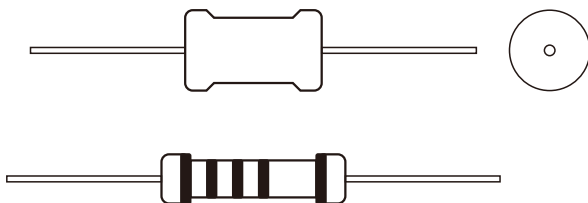


#### 4. 外形寸法 External dimensions

散装P形与卧式M形系列 P type & M-Form series (Horizontal Forming)

P

Type

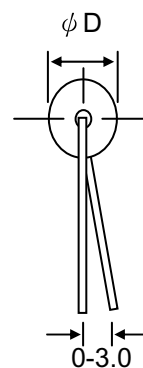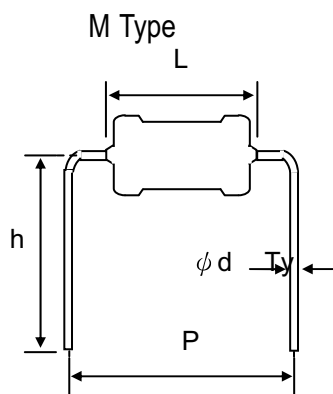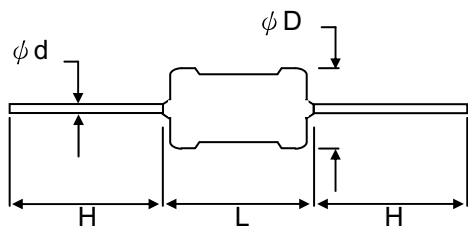

单位：mm

Unit：mm

| 种 类 Type           |                   | 尺 寸 Dimensions |          |           |        |          |          |
|--------------------|-------------------|----------------|----------|-----------|--------|----------|----------|
| 普通型<br>Normal Size | 小型化<br>Small Size | L              | $\phi D$ | $\phi d$  | H      | P        | h        |
| 1/2W               | 1WS               | 9.0±1.0        | 3.2±0.5  | 0.38±0.05 | 18±3.0 | 12.5±1.0 | 10.0±1.0 |
| 1W                 |                   | 11.0±1.0       | 3.5±0.5  | 0.42±0.05 | 24±3.0 | 15.0±1.0 | 14.0±1.0 |
|                    | 2WS               | 11.0±1.0       | 4.0±0.5  | 0.50±0.05 | 24±3.0 | 15.0±1.0 | 14.0±1.0 |
| 2W                 | 3WS               | 15.0±1.0       | 5.0±0.5  | 0.5±0.05  | 22±3.0 | 20.0±1.0 | 20.0±1.0 |
| 3W                 | 5WS               | 17.0±1.0       | 6.0±1.0  | 0.6±0.05  | 26±3.0 | 25.0±1.0 | 25.0±1.0 |
| 5W                 |                   | 24.0±1.0       | 8.0±1.0  | 0.65±0.05 | 28±3.0 |          |          |
|                    |                   |                |          |           |        |          |          |